WALLSTATION



72350 - CONNECT PRO WallStation Black 72351 - CONNECT PRO WallStation White

WALLSTATION

IPORT CONNECT Pro WallStation Install Manual

Thank you for purchasing the all new IPORT CONNECT Platform. We hope you enjoy this revolutionary new system and if at any time you need more assistance please Contact IPORT Tech Support via Online chart or through our help desk.

- IPORT Team

Whats in box:

- 1 IPORT CONNECT WallStation
- 1 IPORT Security tool 1.5mm hex key
- 1 Info Card
- 4- Drwyall Anchors
- 4 -#6 HighLow thread Screws
- 1 RJ45 DC Connector
- 1 RJ45 TE Connector
- 1 Phoenix DC Connector
- 1 Phoenix TE Connector

Product Info Page - <u>www.iportproducts.com/cpwallsta-</u> tion

Glossary of Terms:

- WallStation The fully assembled CONNECT PRO Station holding and charging the IPORT CONNECT Case.
- Cover Plate The removeable plastic cover that attaches to the WallStation, covering the label and Screws.
- **IPORT Security Tool** The orange handled 1.5mm hex tool used for locking and unlocking IPORT Products.

IPCRT CONNECT

WALLSTATION

WALLSTATION INSTALL OPTIONS

Before starting, detimine the install scenario that best describes your desired install. Then click on the title to be directed to the appropriate install steps.

New Construction using Cat 6 Cable | pg. 4

Existing Construction using Cat 6 Cable | pg. 15

Upgrading a LAUNCH WallStation | pg. 25

New Construction using 14-2 Wire | pg. 32


Existing Construction using 14-2 Wire | pg. 45

WALLSTATION

IPORT CONNECT Pro WallStation Install New Construction - Cat6


Before Construction is complete

 Determine the desired location of the IPORT Connect Pro WallStation will live when the construction is completed.

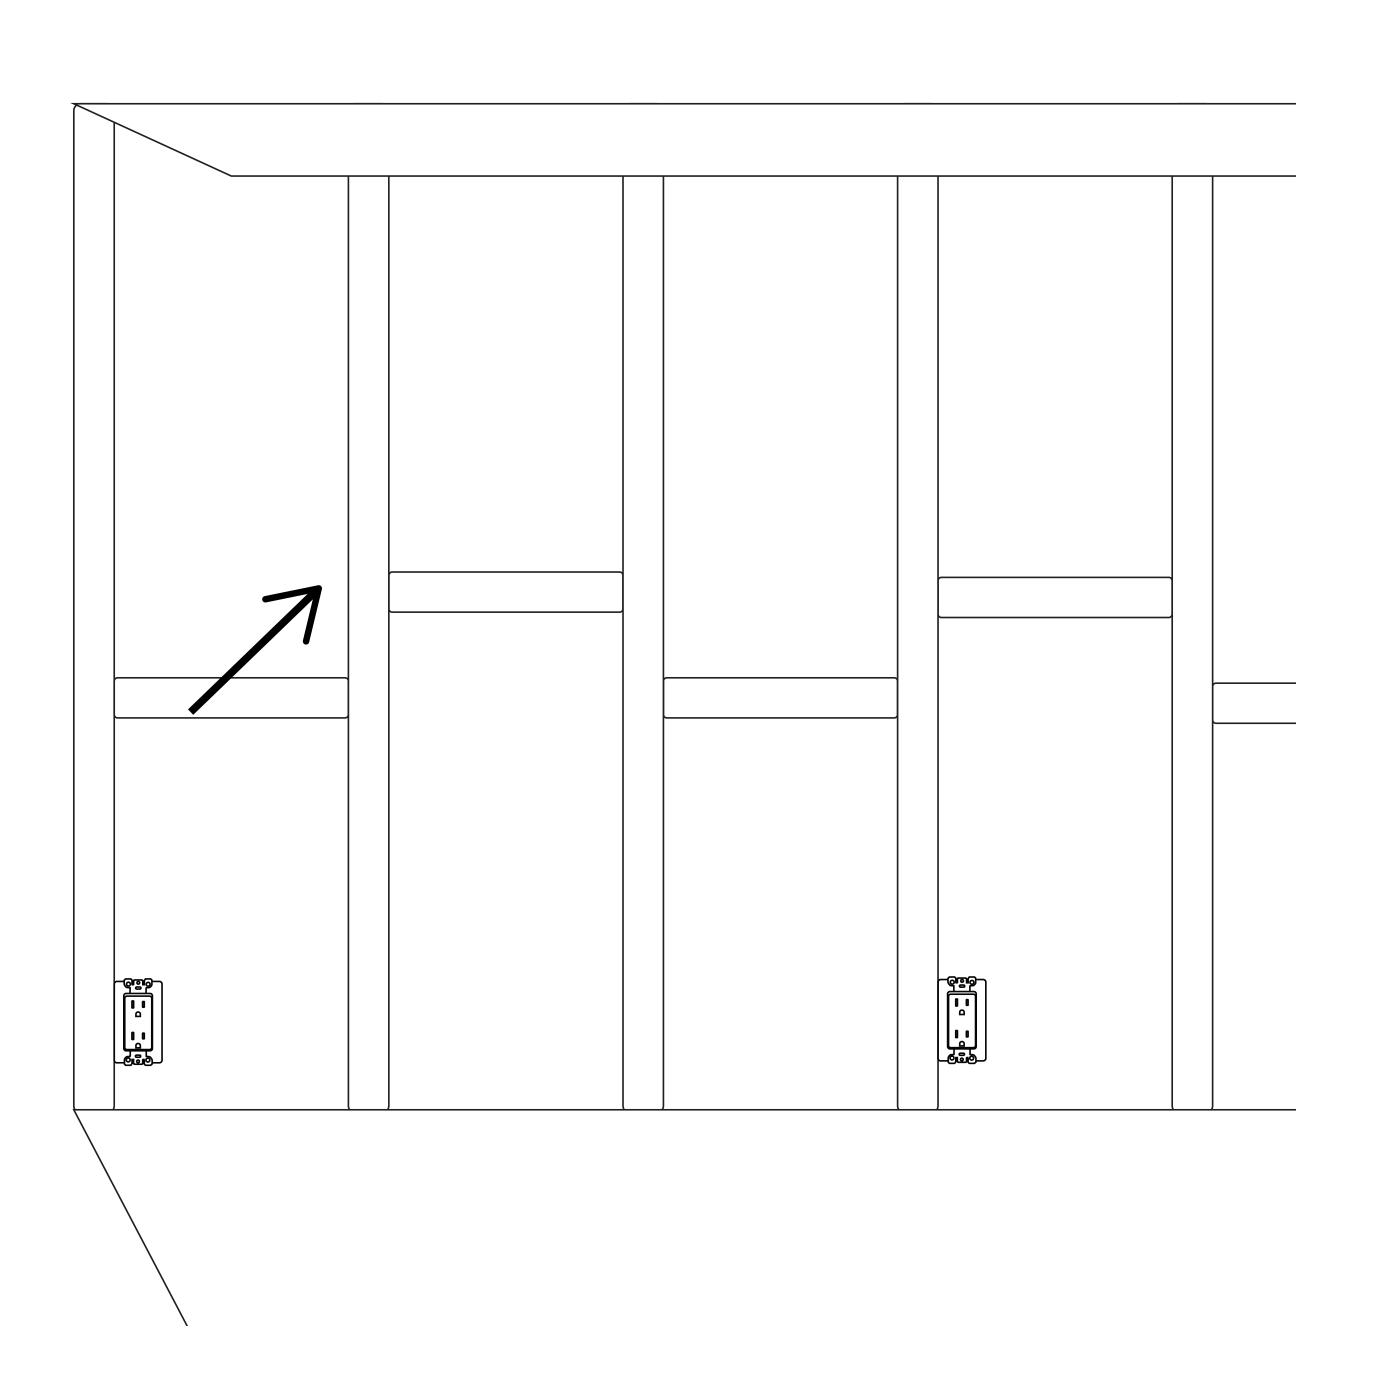



WALLSTATION New Constructions Cat6

 Install a 1 Gang electrical box or low voltage ring in the desired location of the WallStation.

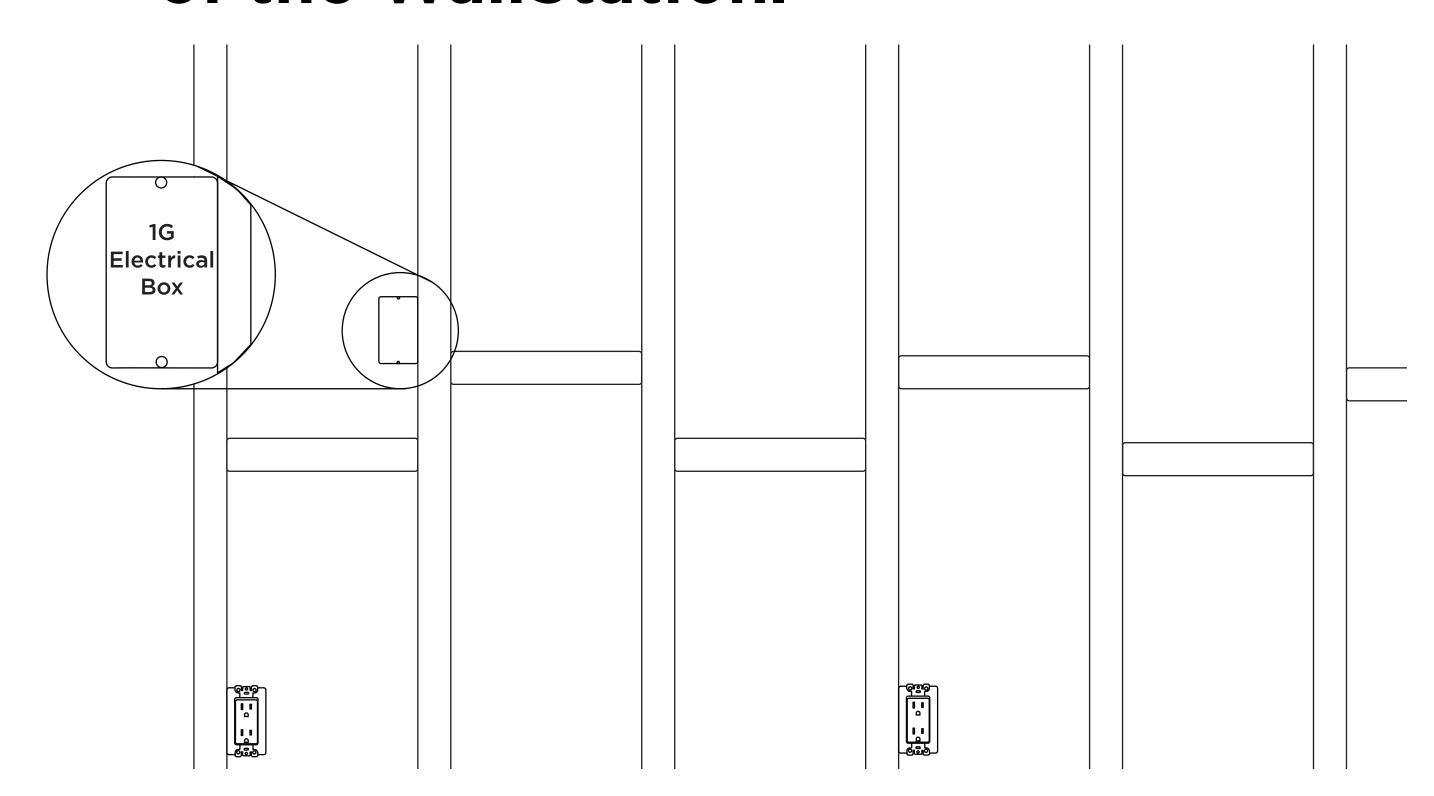

NOTE: The CONNECT PRO WallStation will cover a 1G electrical box only. A 2 Gang electrical box will interfere with the mounting hardware.

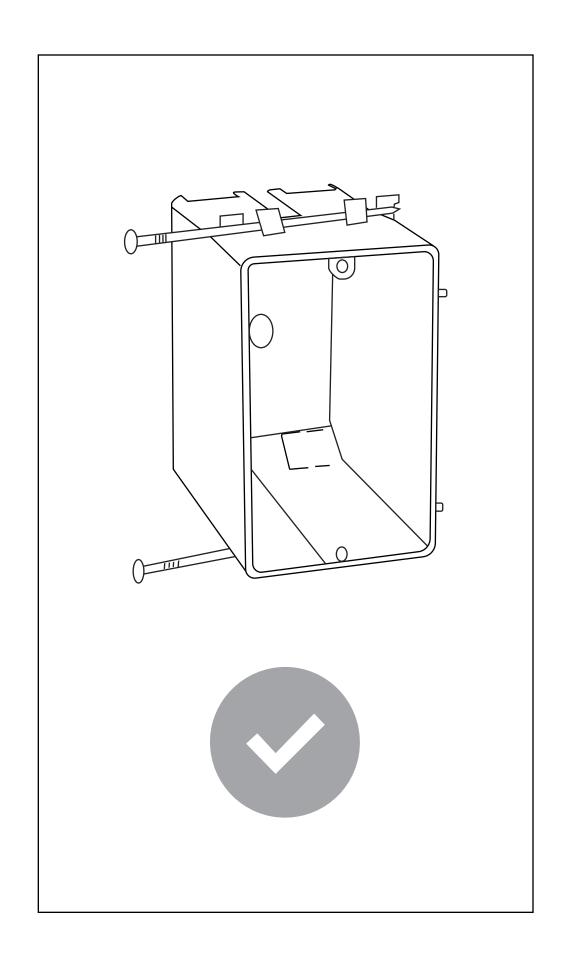


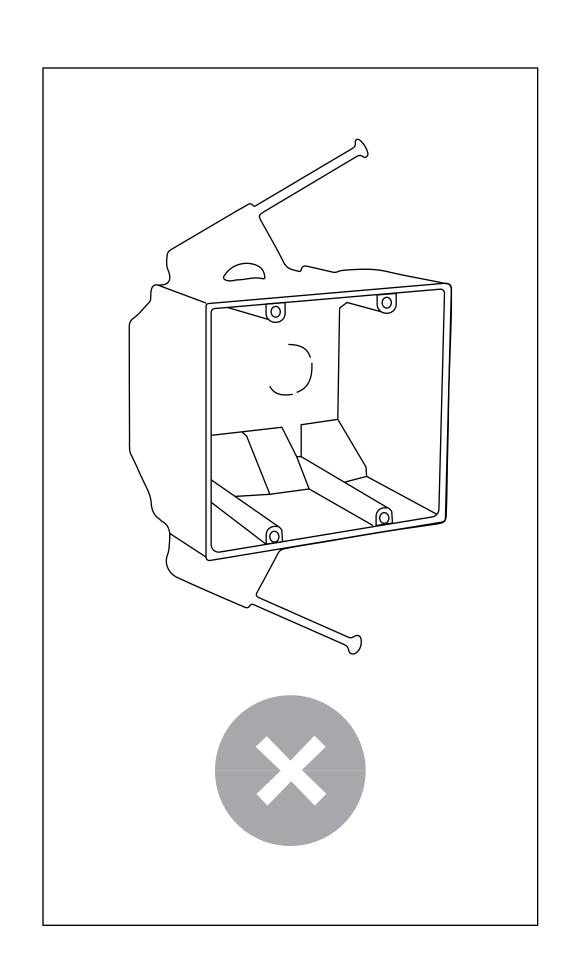

WALLSTATION New Constructions Cat6

3. Run a Cat6 cable terminated with an RJ45 Connectors (T568A or T568B) from the WallStation location to a nearby AC outlet, closet, or network rack location and terminate the other end of the cable the same as before.


NOTE: Make sure to secure the Cat6 cable appropriately onto the Electrical box or Low Voltage ring to retrieve at a later time.

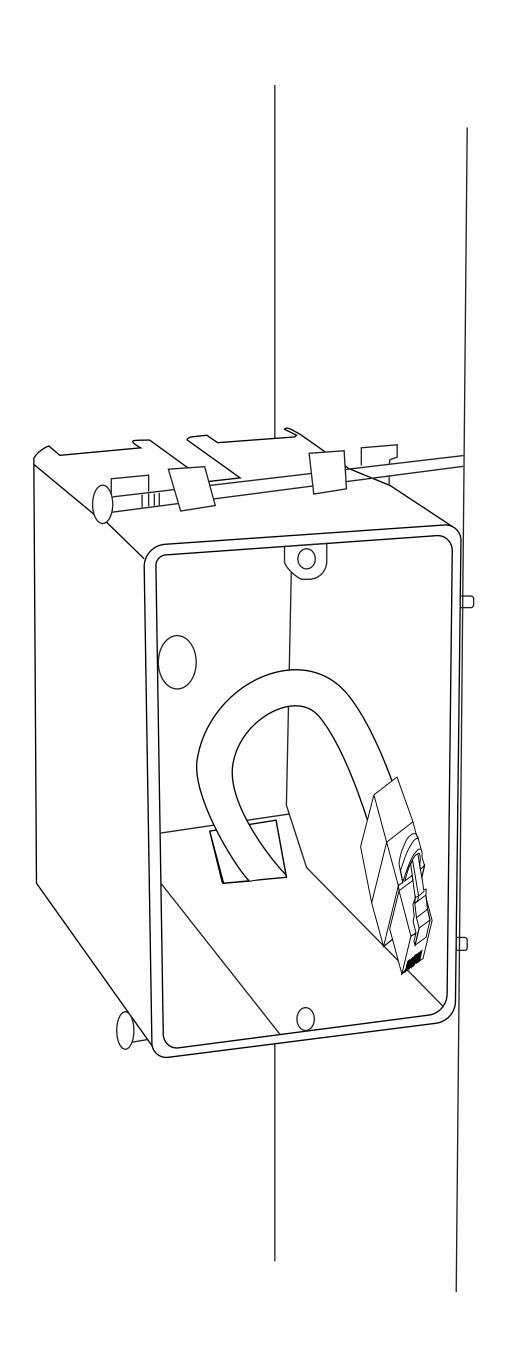


WALLSTATION New Constructions Cat6


Installing the WallStation After Construction

Terminate the Cat6 with an RJ45
 Connector if not done so previously using T568A or T568B standards.

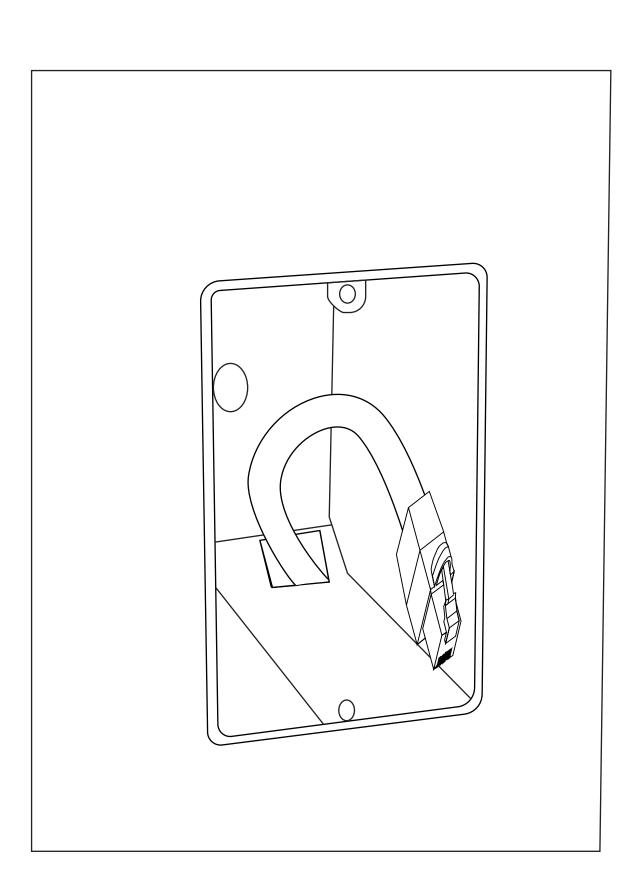


2. Remove the WallSation, Drywall anchors and Screws from the box and place on a table.

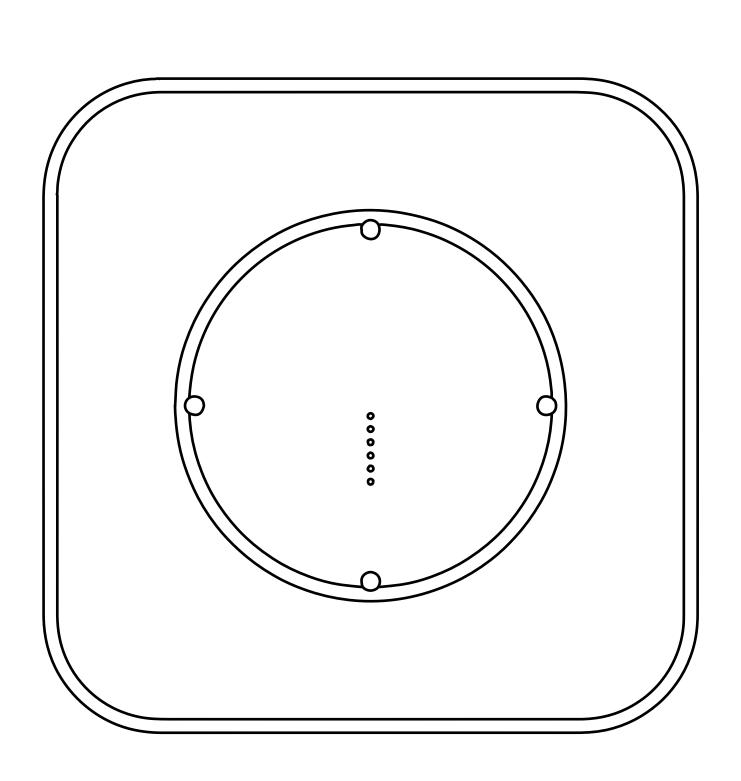

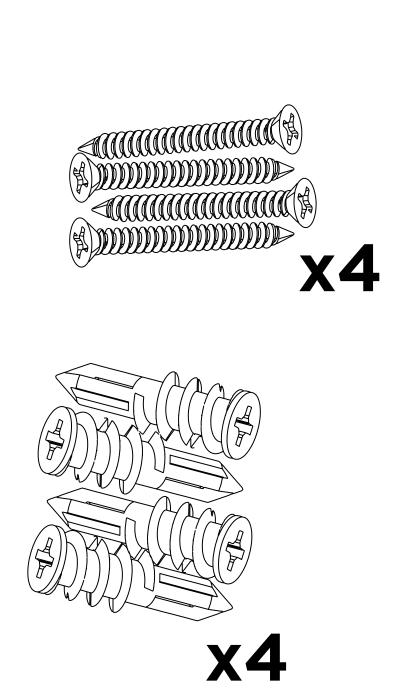


WALLSTATION New Constructions Cat6

3. Insert the WallStation into the 1G box.

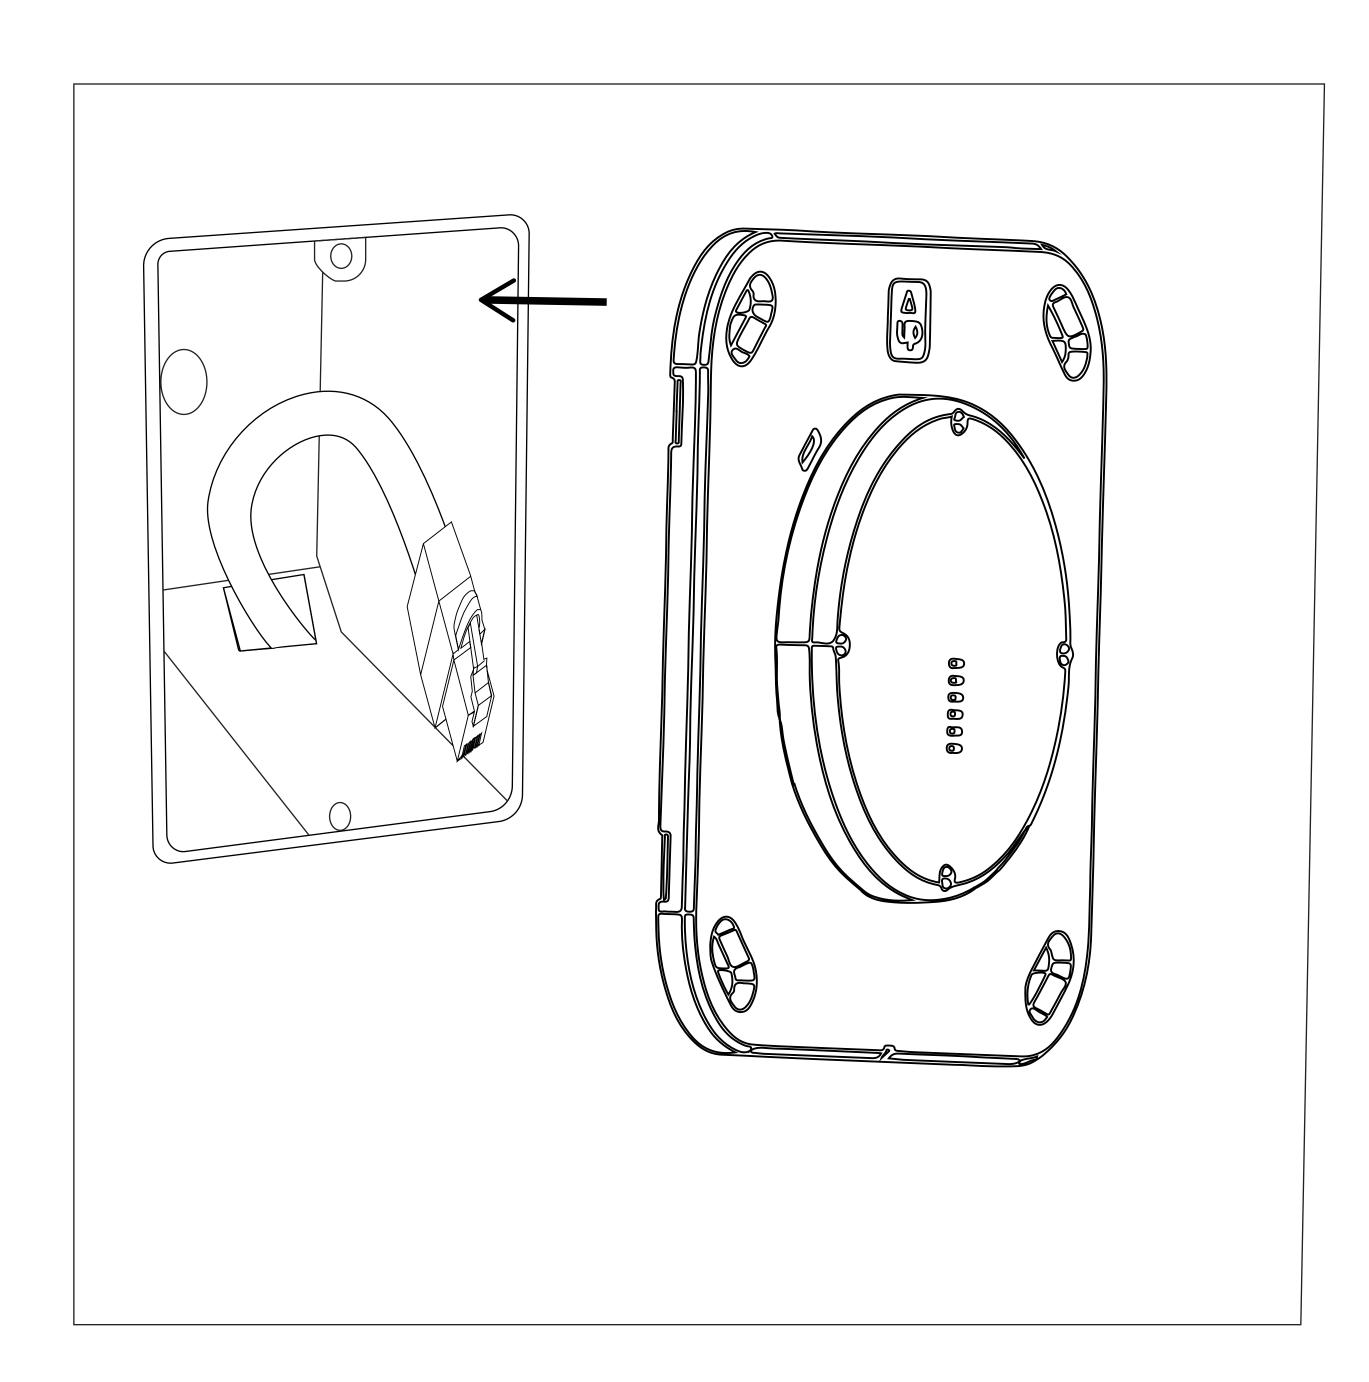


WALLSTATION New Constructions Cat6

4. Use a leveling tool to level the WallStation and mark the 4 locations for the provided Anchors. Remove the WallStation from the 1G Box.

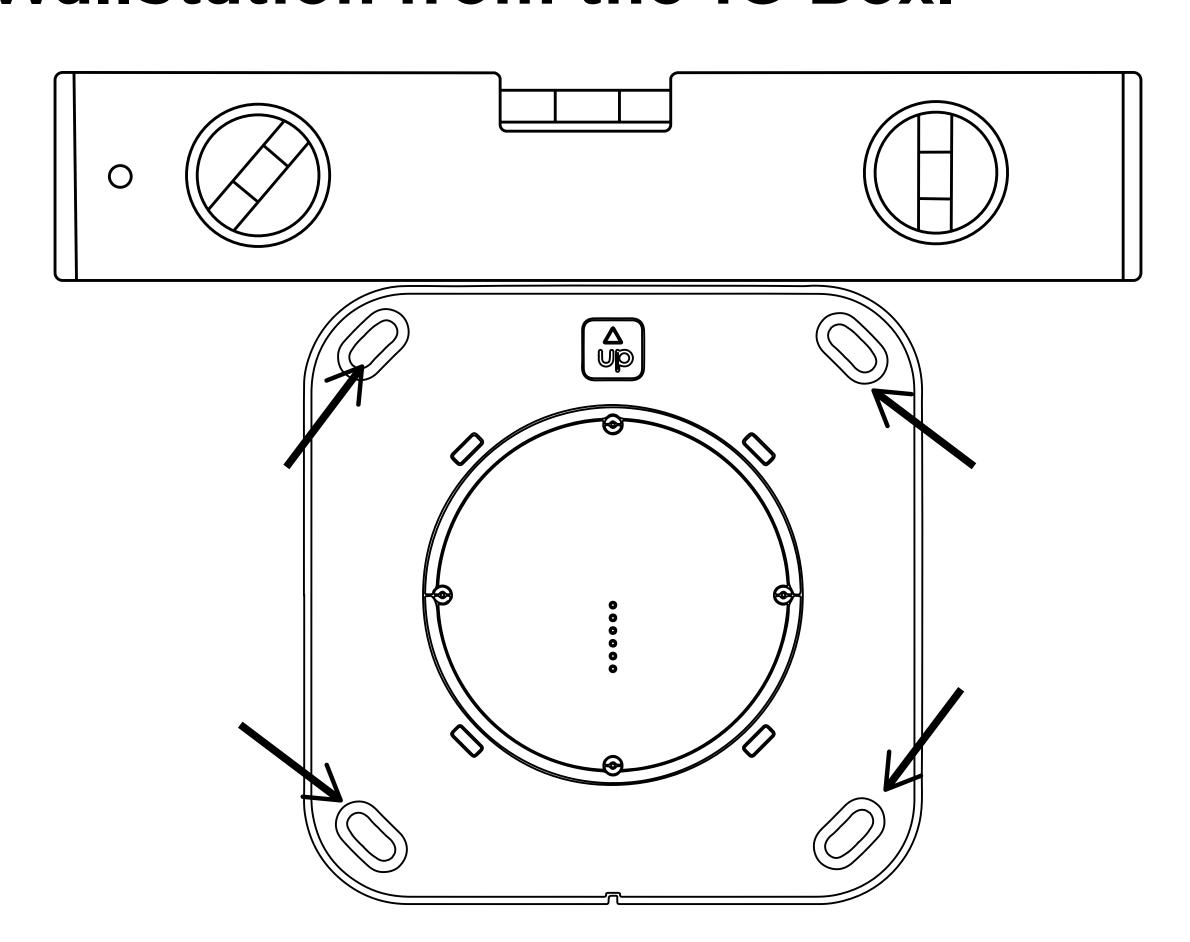


5. Screw the 4 provided anchors into the wall where marked.

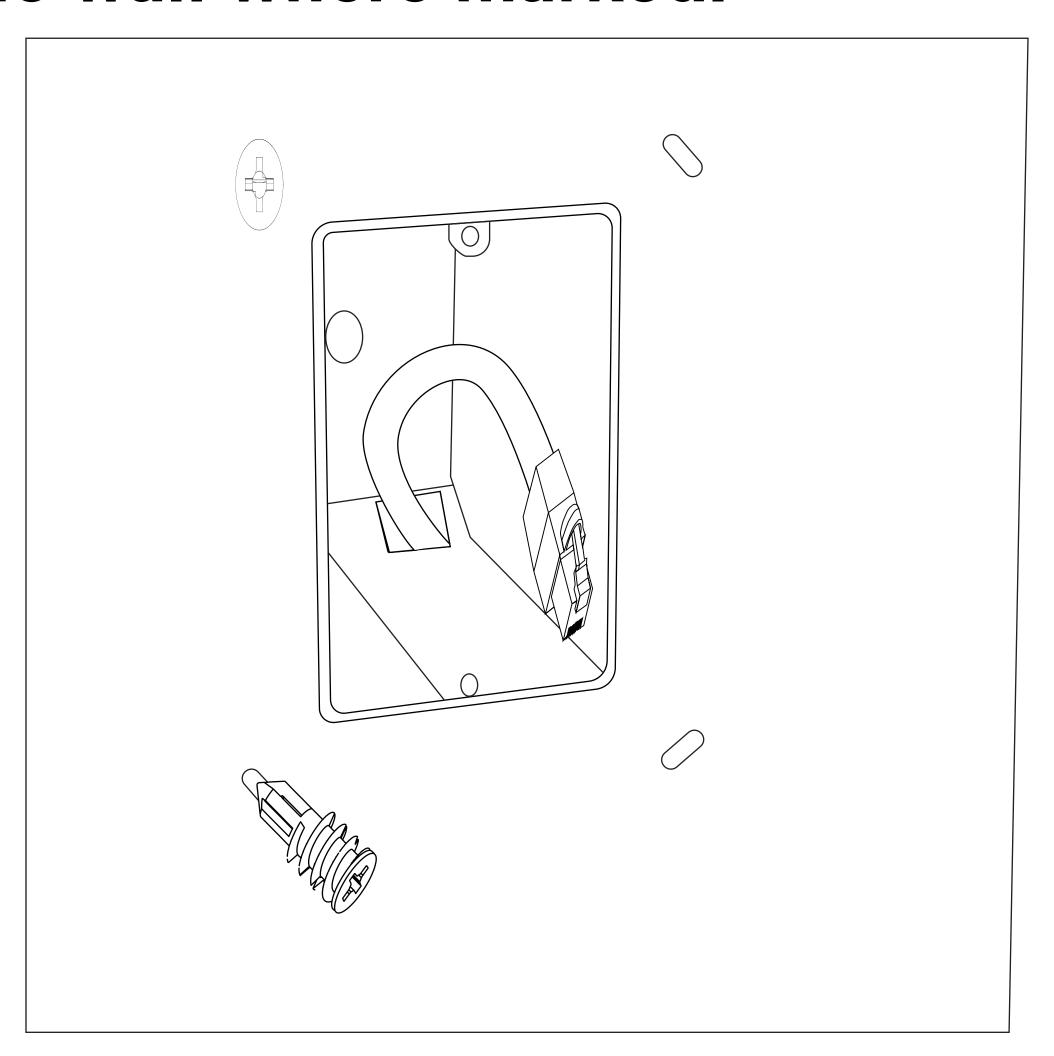


IPCRT CONNECT

WALLSTATION New Constructions Cat6

6. Connect the RJ-45 to TE Connector provided to the Cat6 cable and onto the white TE connector WallStation DC Adapter.

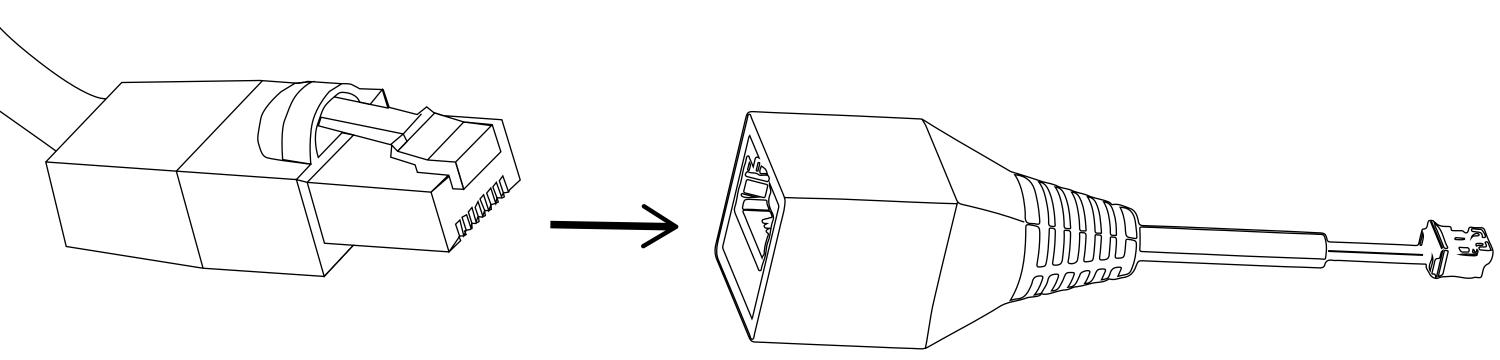

Label wire WARNING: Only for DC Low Voltage - Not for PoE

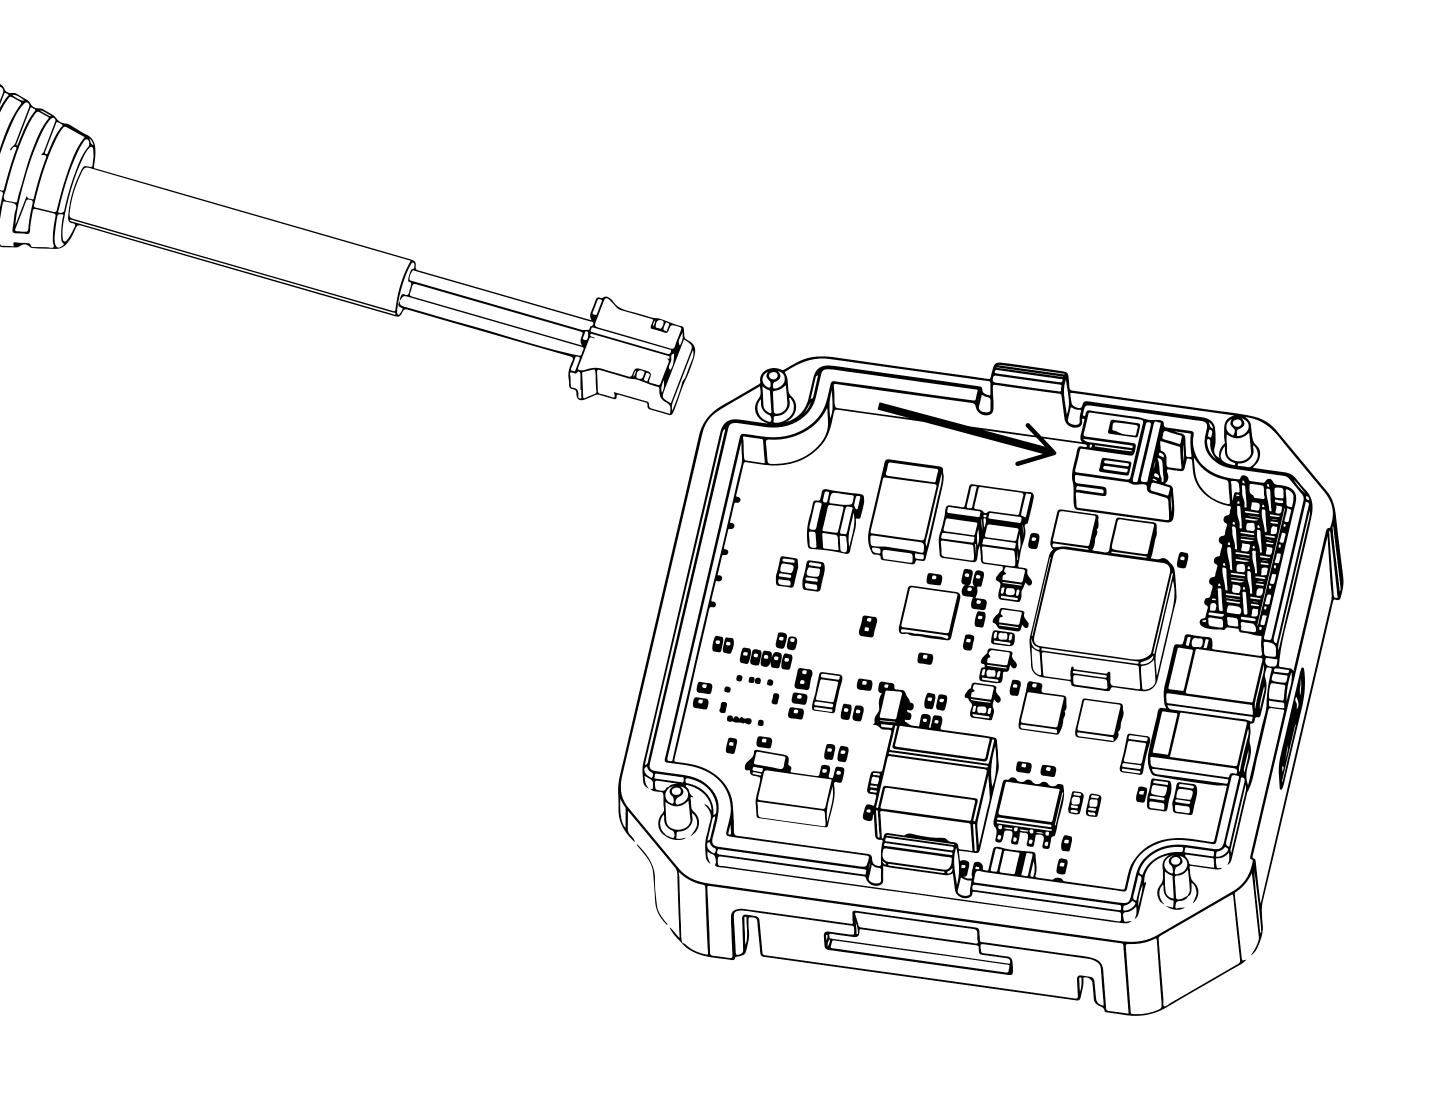


Zip tie the Connector to the DC board for added cable retnetion.

WALLSTATION New Constructions Cat6


7. Insert the WallStation back into the 1G box and use the provided screws to attach the WallStation to the wall.


IMPORTANT: Make Sure to position the WallStation with the Up Arrow facing up. Use a leveling tool to level the WallStation and hand tighten the screws.

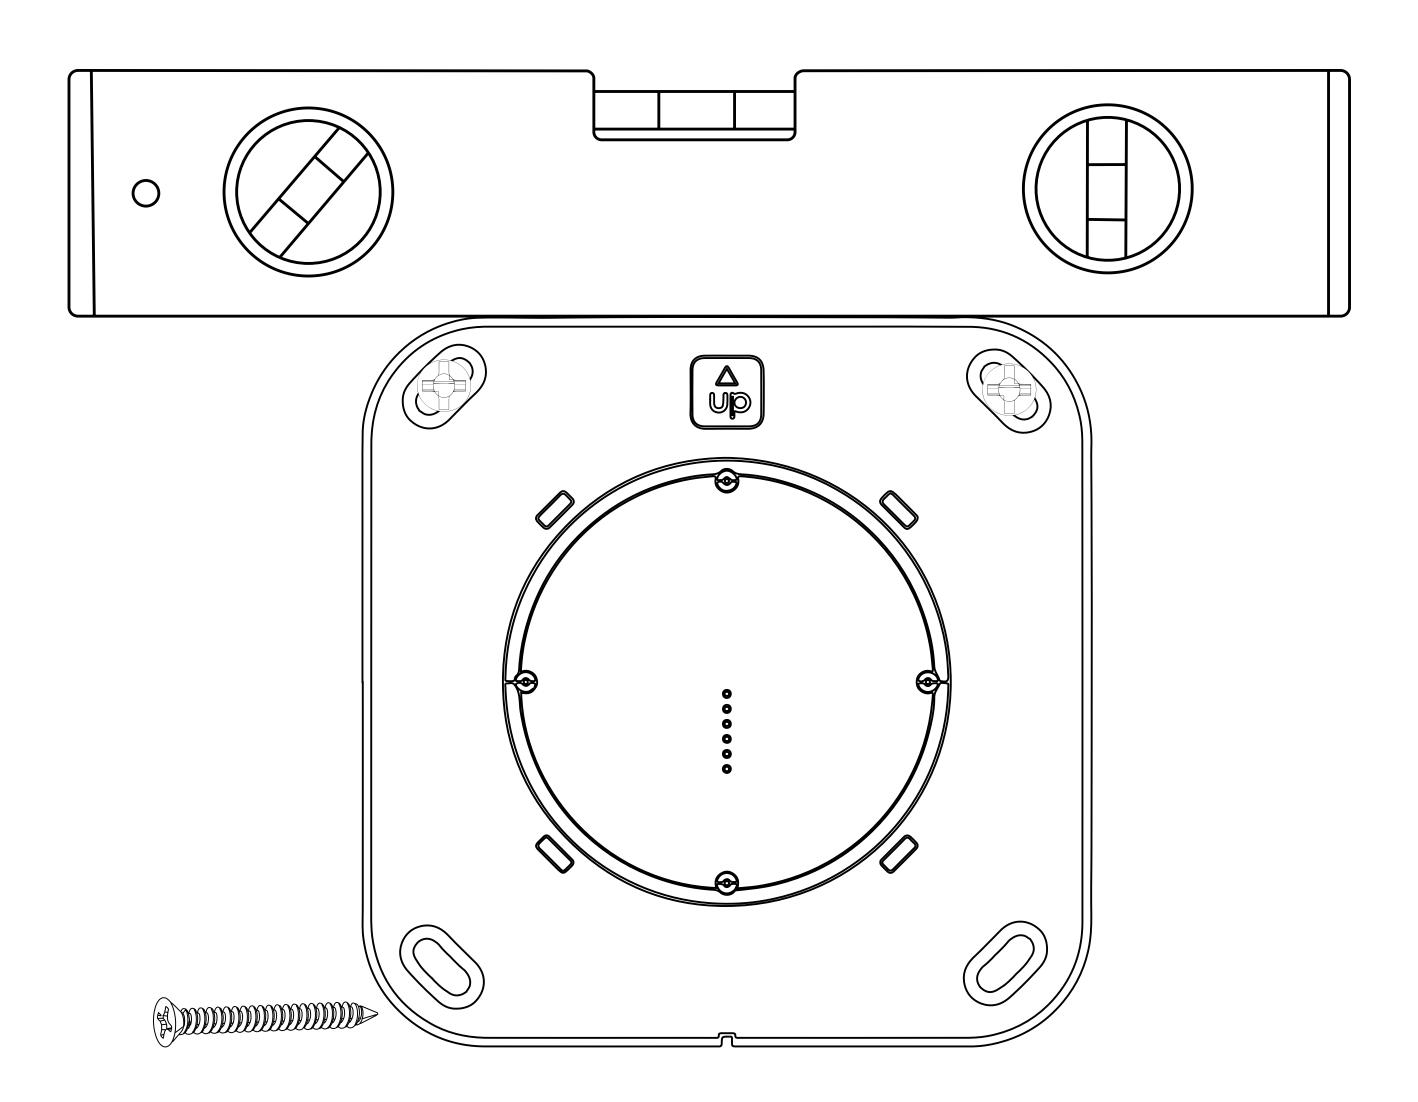

WALLSTATION New Constructions Cat6

8. Attach the WallStation Cover Plate over the WallStation making sure to alight the positioning notch with the tooth on the WallStation.

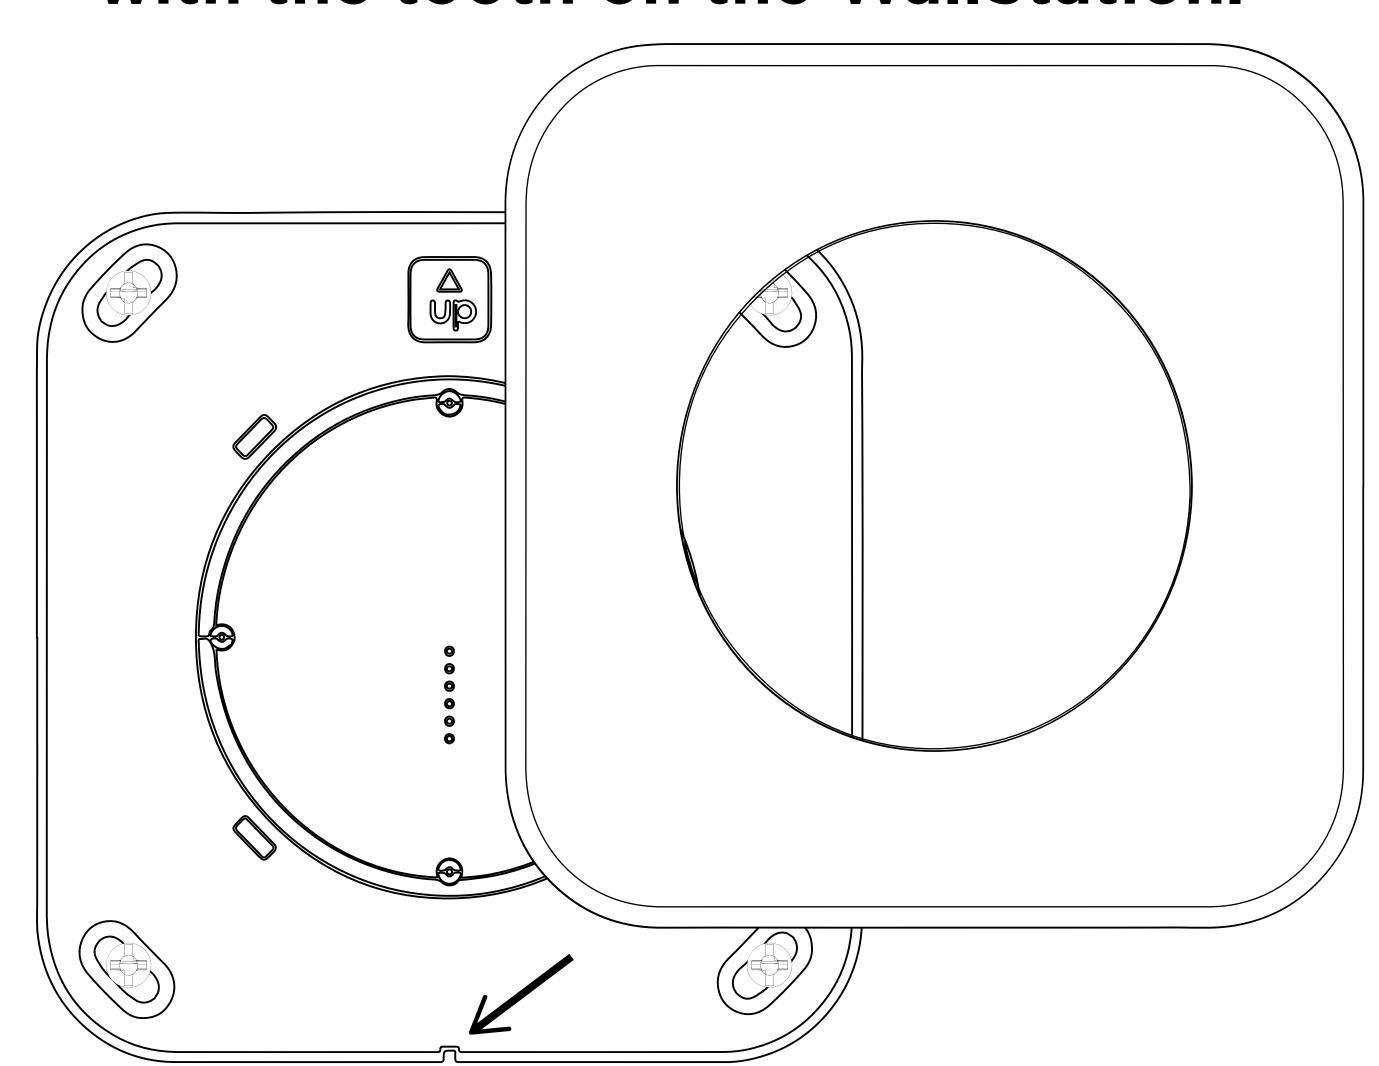


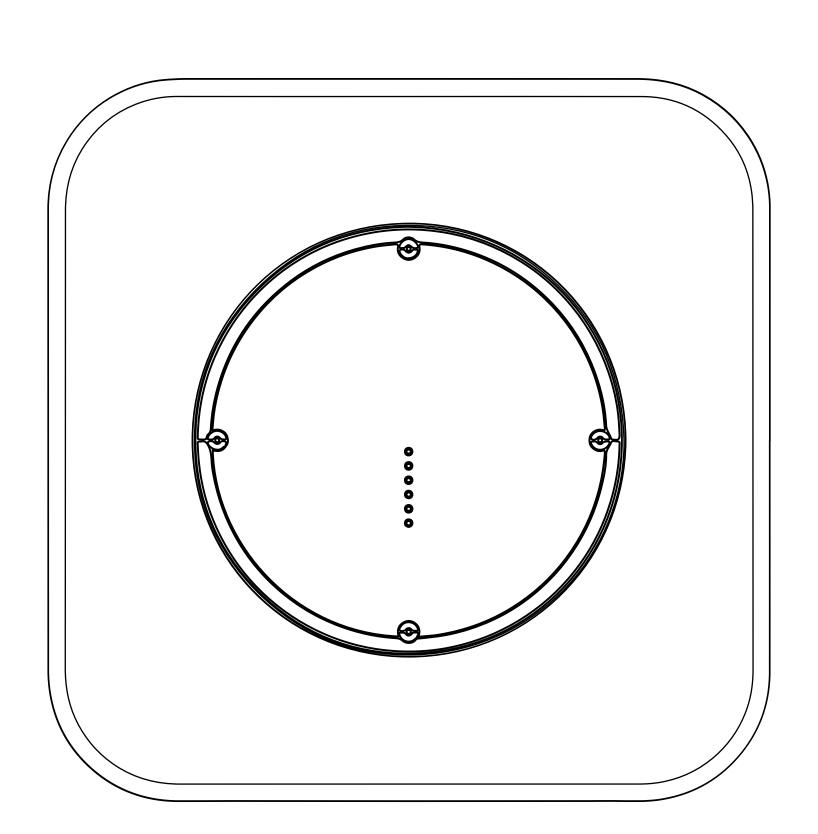


IPCRT CONNECT

WALLSTATION New Constructions Cat6

9. Connect the RJ-45 to DC Connector at the other end of the Cat6 Cable.

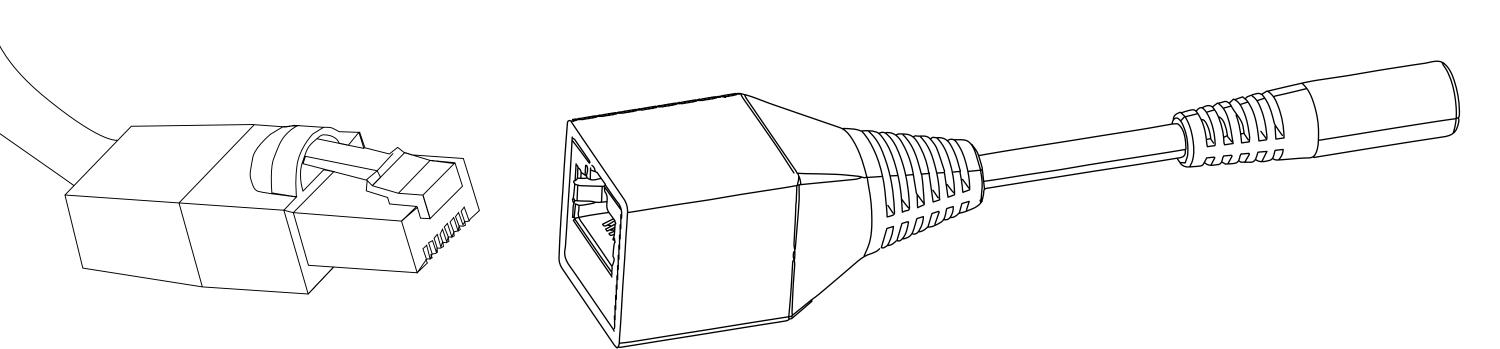


10. Connect the provided DC power adapter into the other end of the RJ-45 DC adapter and plug in the power adapter into an AC outlet.

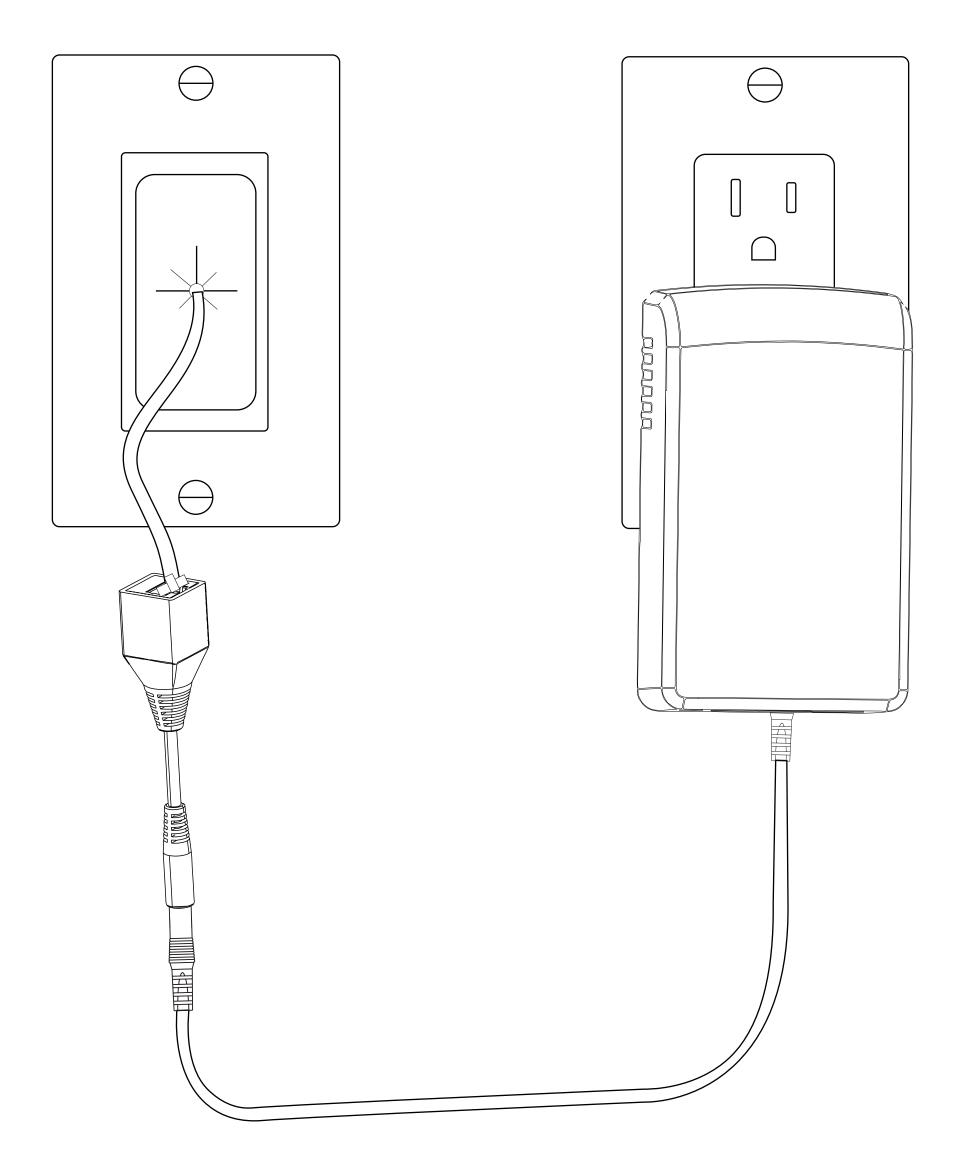

Grommit not included


WALLSTATION

For a clean finished look place the Connector and DC barrel plug back throug the grommit into the wall.

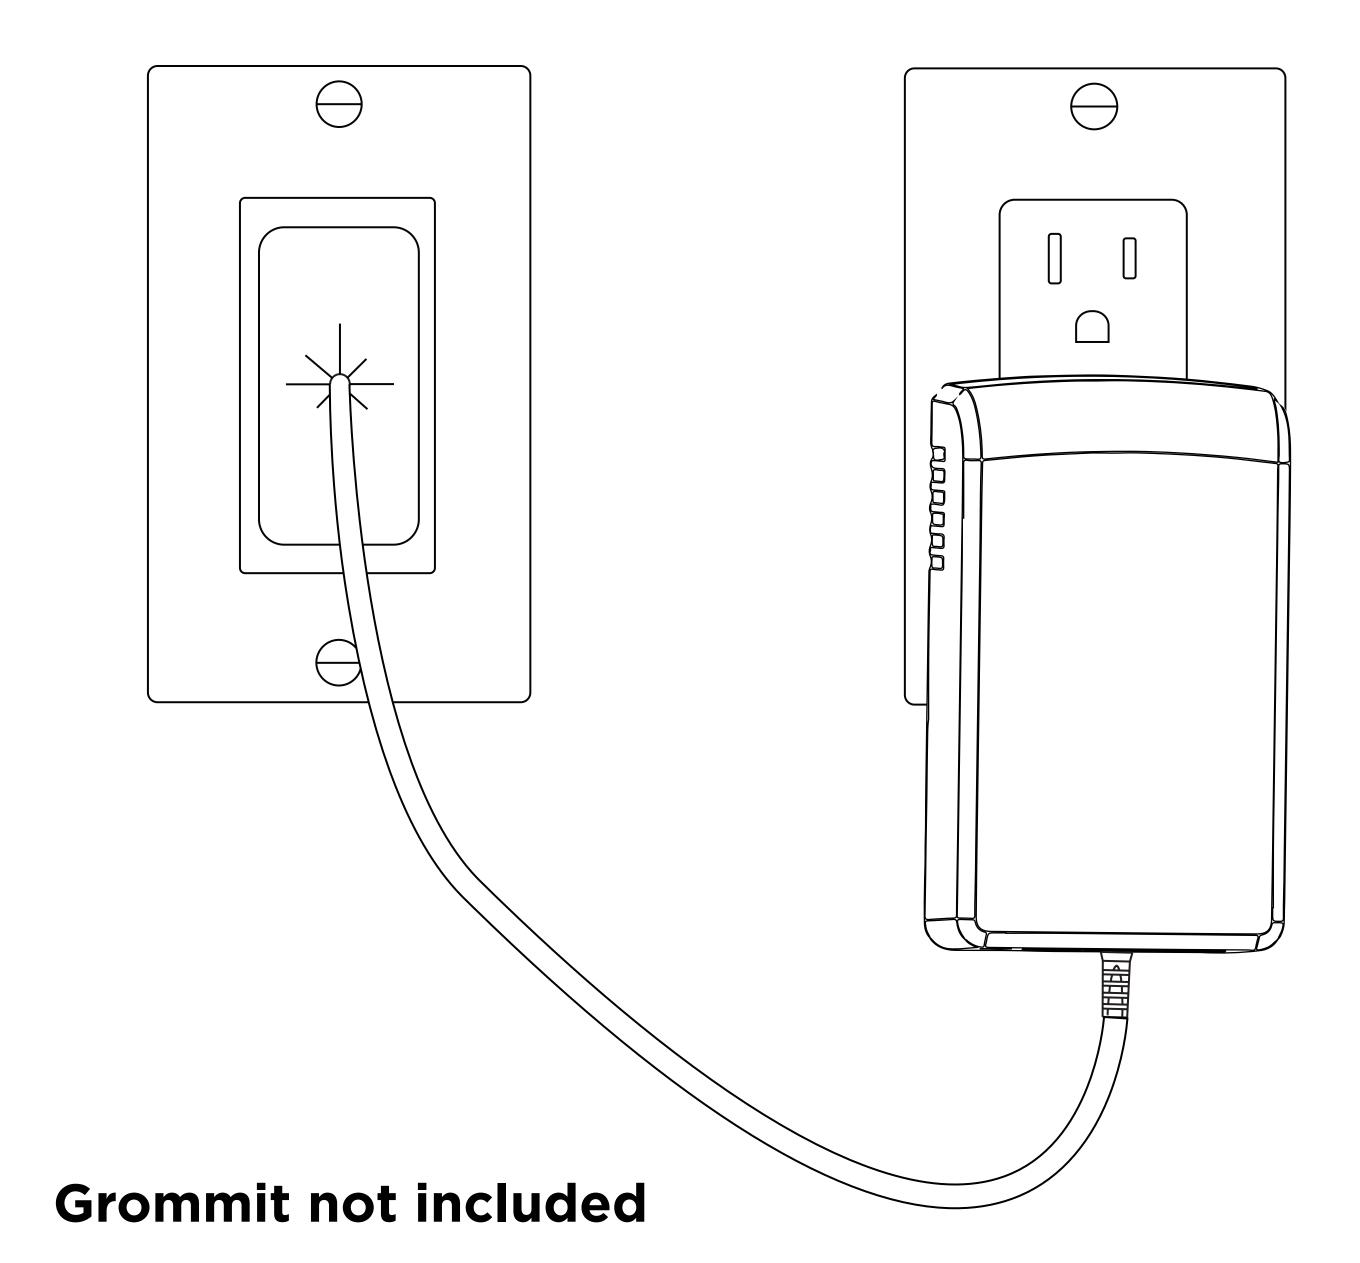

WALLSTATION New Constructions Cat6

11. Place a Case with an iPad installed onto the WallStation to determine power was installed properly and the iPad charges.

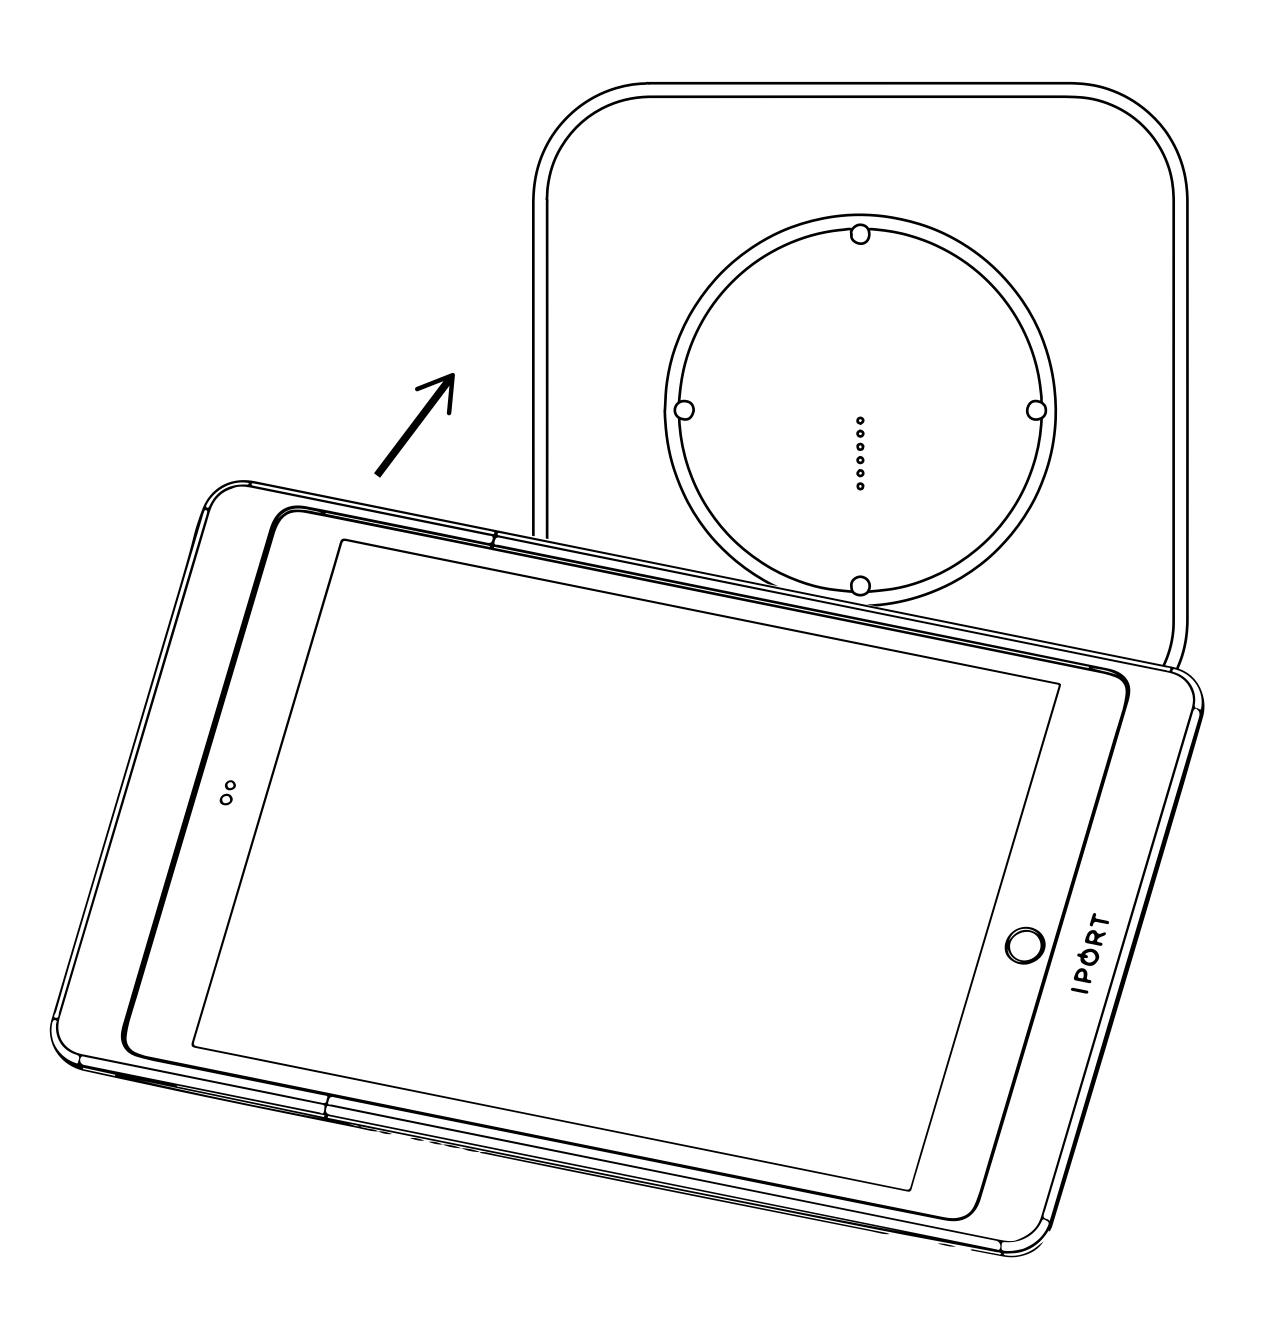


COMPLETE


WALLSTATION

Installing the WallStation in Existing Construction - Cat6

 Determine the desired location of the IPORT Connect Pro WallStation.

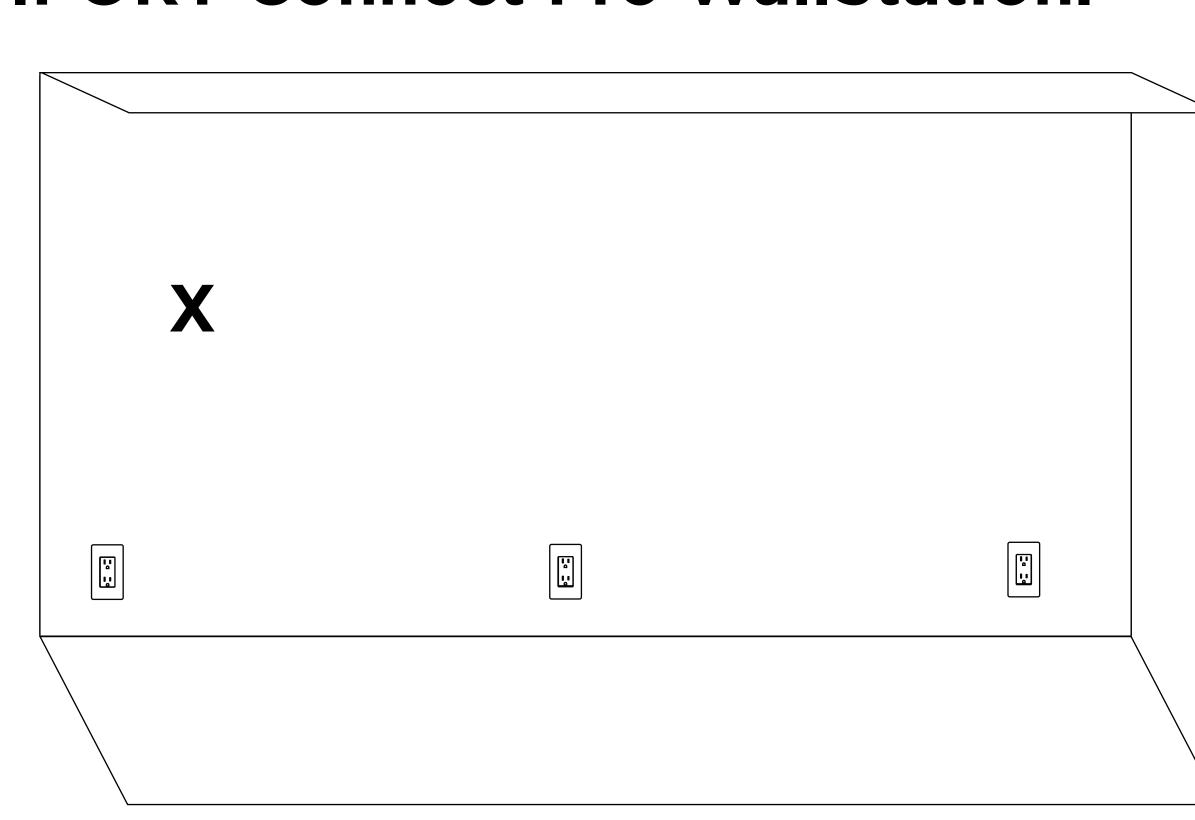


2. Use a 2-3/4" (70mm) hole saw to cut a hole in the desired location of the WallStation

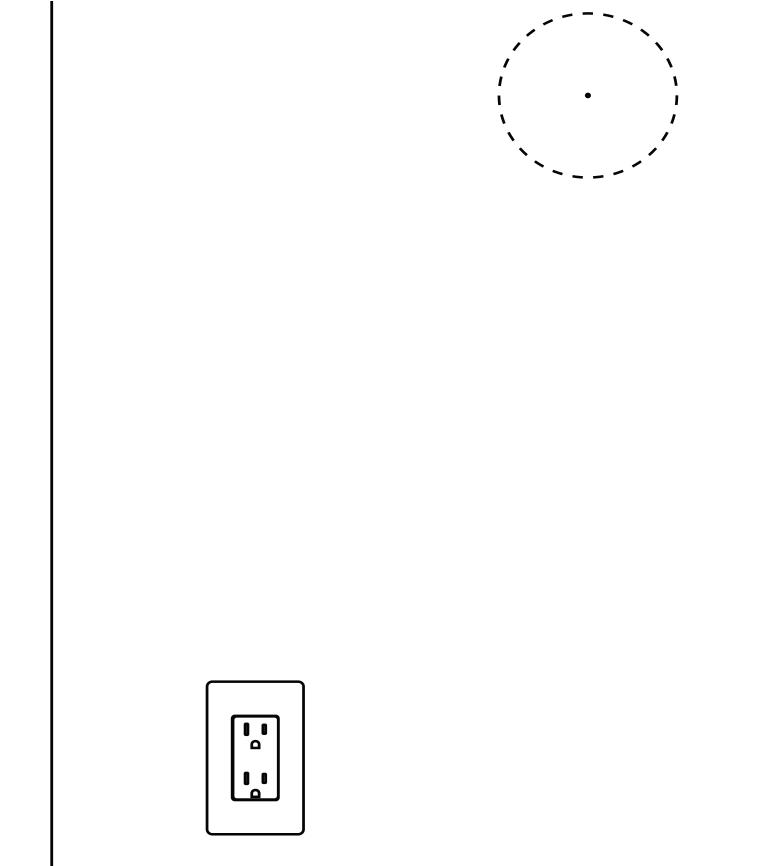


WALLSTATION Existing Constructions Cat6

3. Insert the WallStation into the 2 3/4 - inch hole and use a leveling tool to level the WallStation. Mark the 4 locations for the provided Anchors.

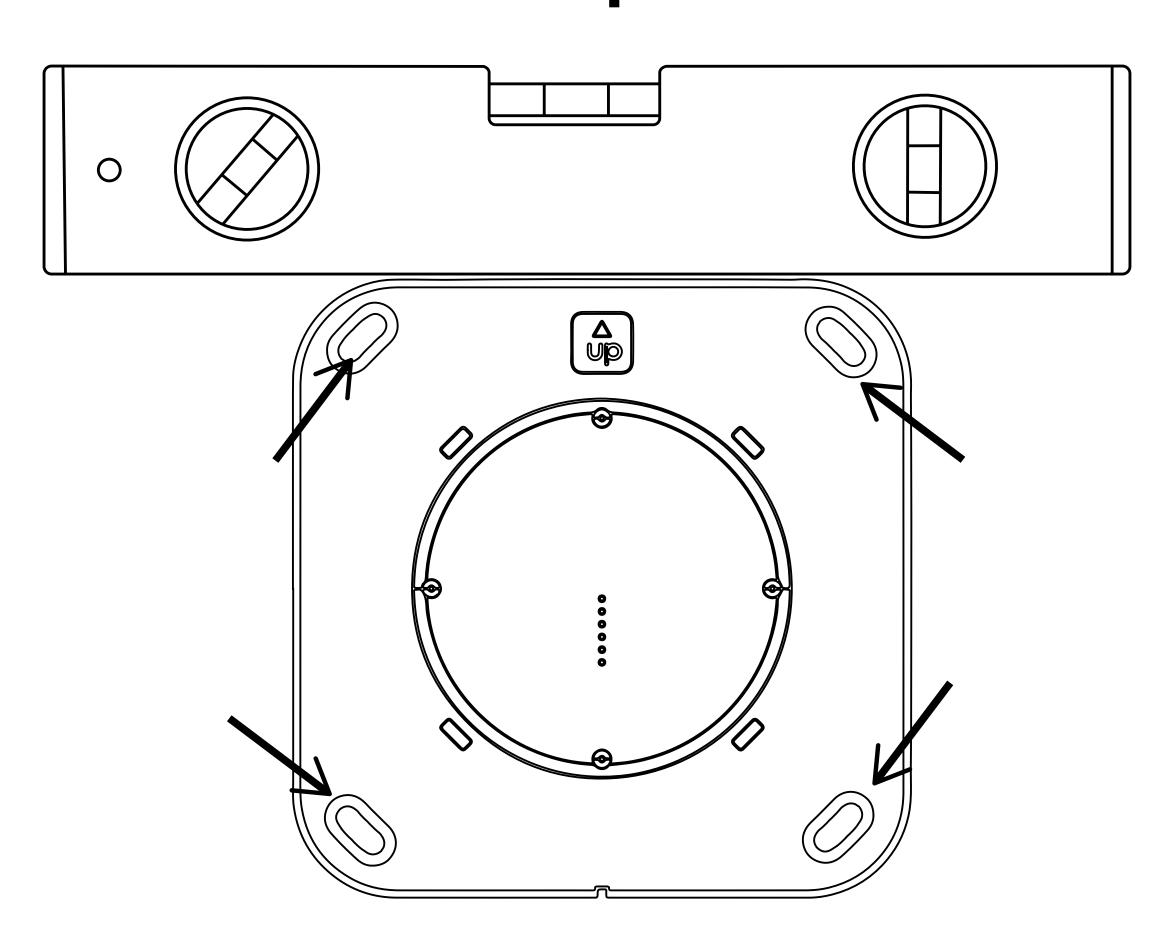


4. Remove the WallStation form the wall once you have marked the 4 anchor locations.

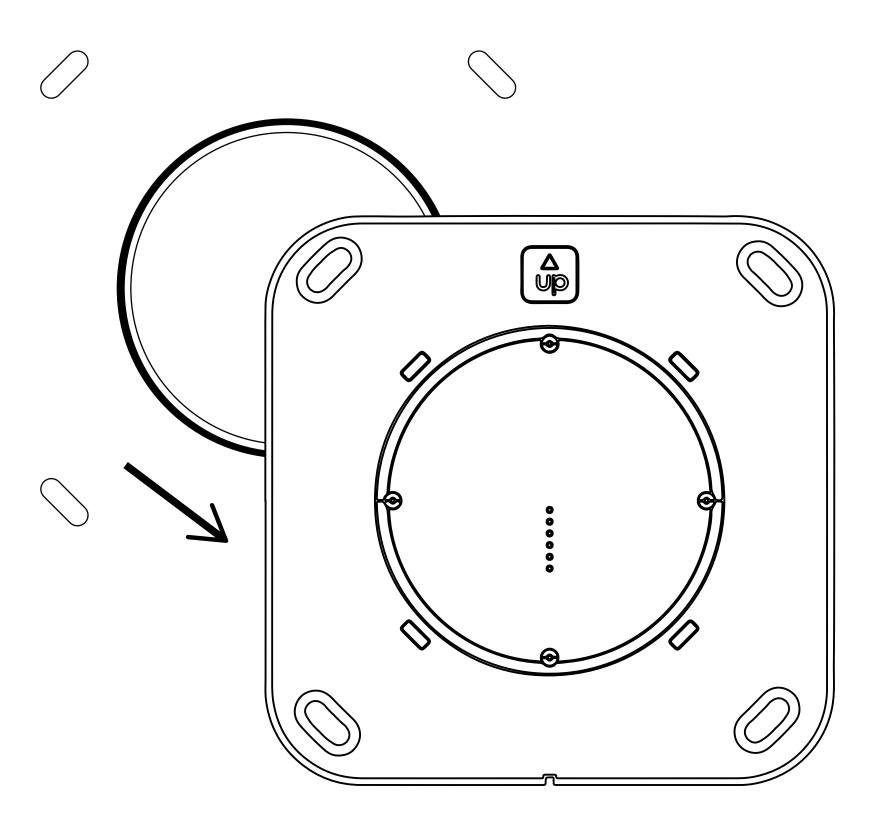


WALLSTATION Existing Constructions Cat6


5. Screw the provided anchors into the wall where marked.

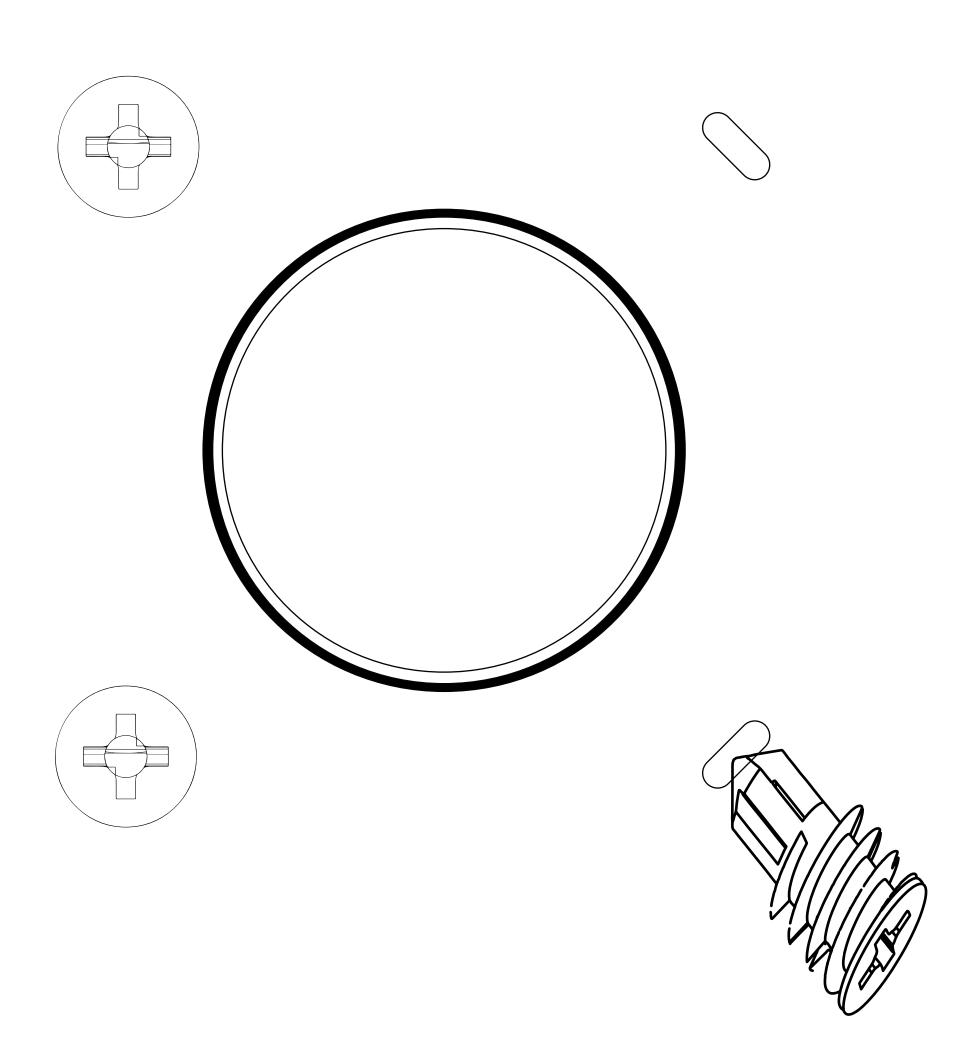


WALLSTATION Existing Constructions Cat6

6. Use the 2 3/4 - inch hole to fish a Cat6 cable to a nearby AC outlet, closet or network rack.

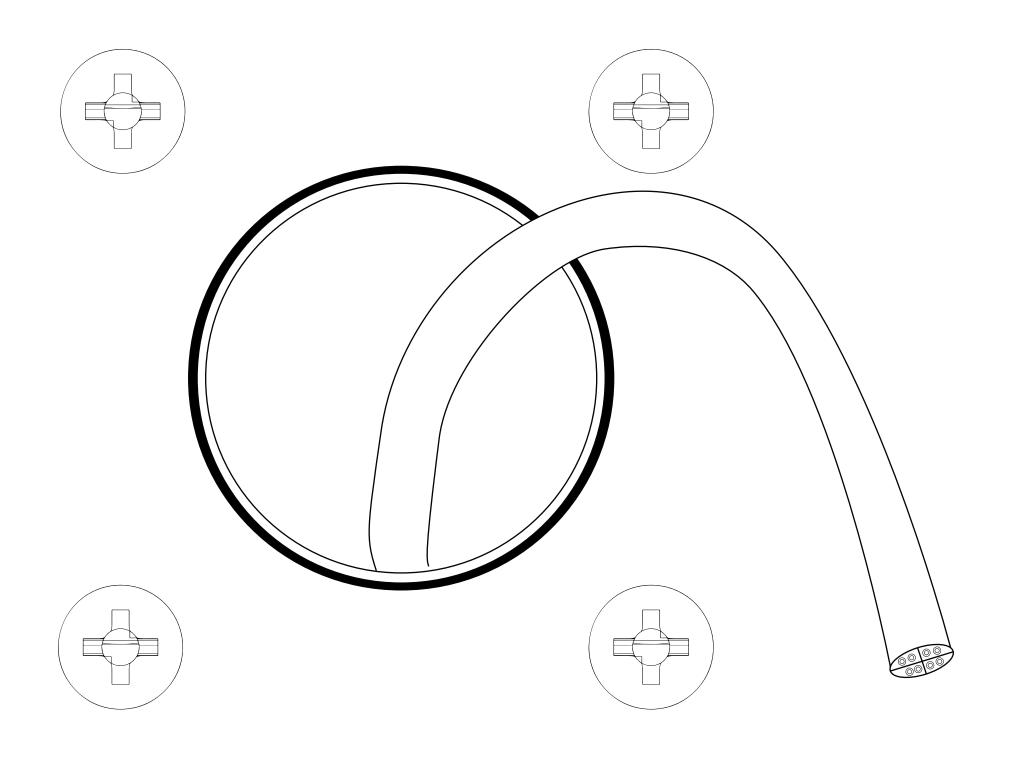

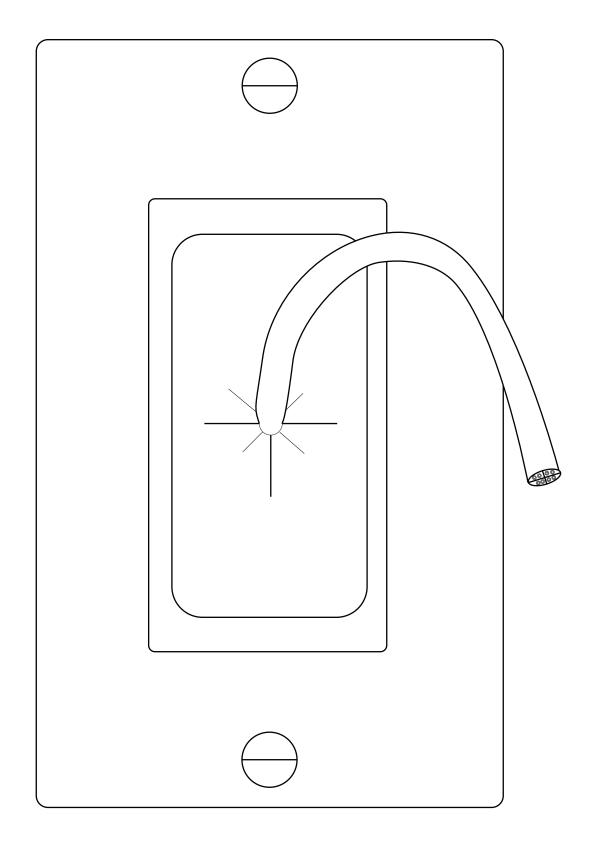


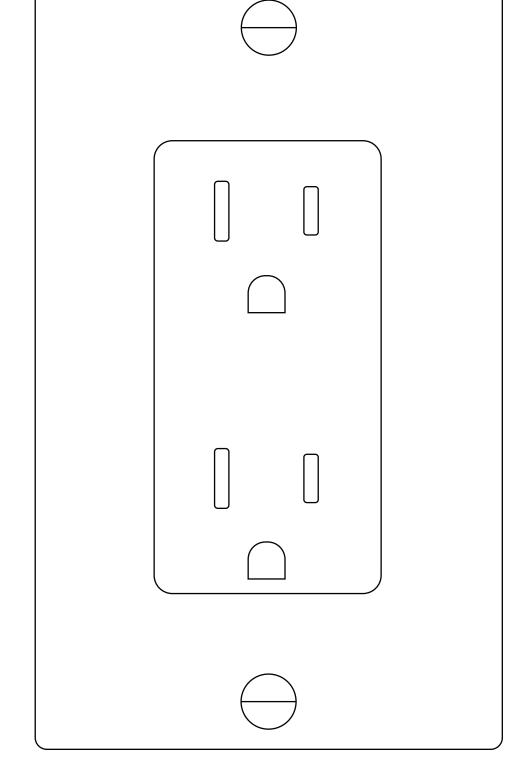


Grommit not included


WALLSTATION Existing Constructions Cat6

7. Terminate both ends the Cat6 with an RJ45 Connector using T568A or T568B standards

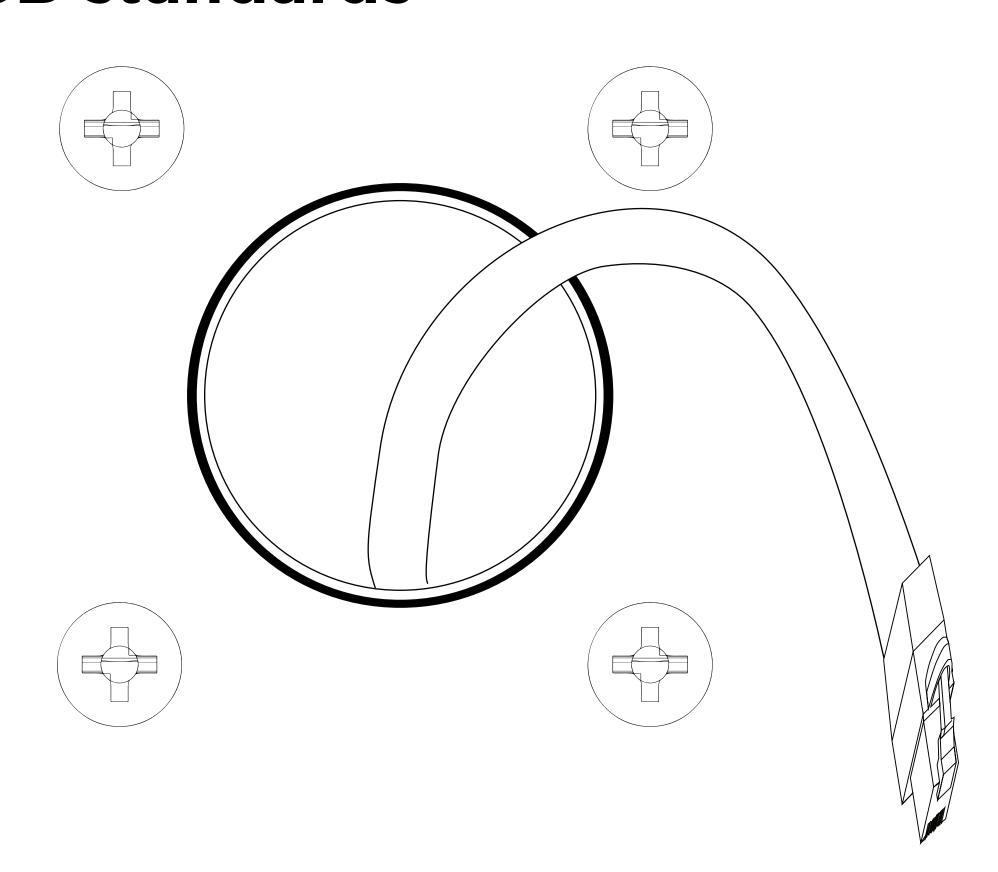

Label wire WARNING: Only for DC Low Voltage - Not for PoE

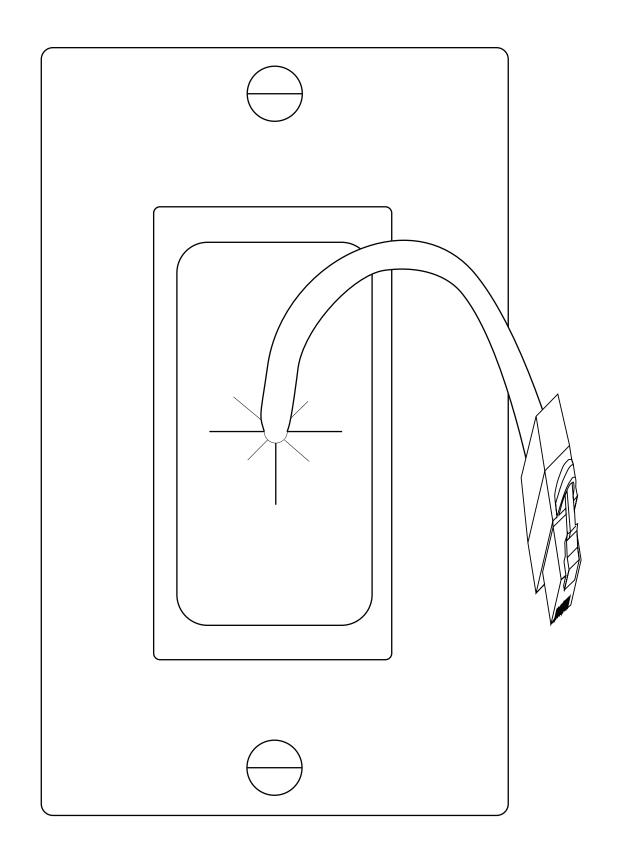


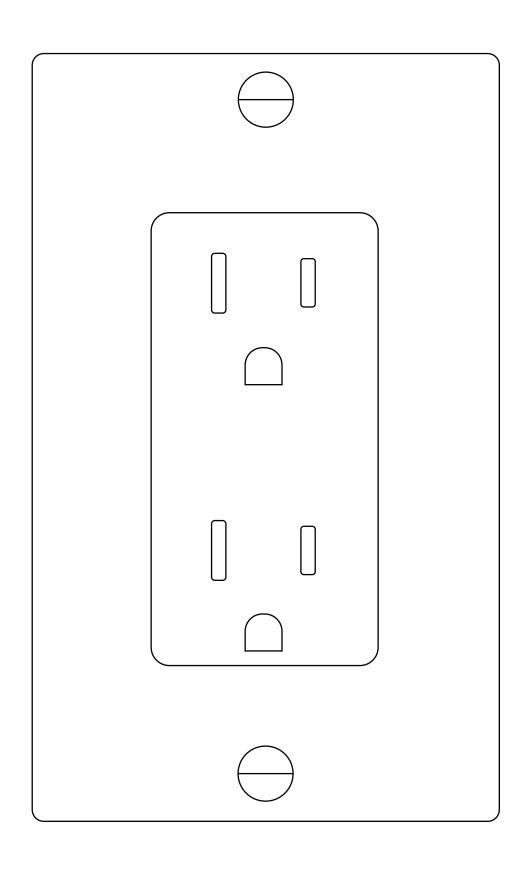


Grommit not included

WALLSTATION Existing Constructions Cat6

8. Connect the RJ-45 to TE Connector provided to the Cat6 cable and onto the white TE connector WallStation DC Adapter.

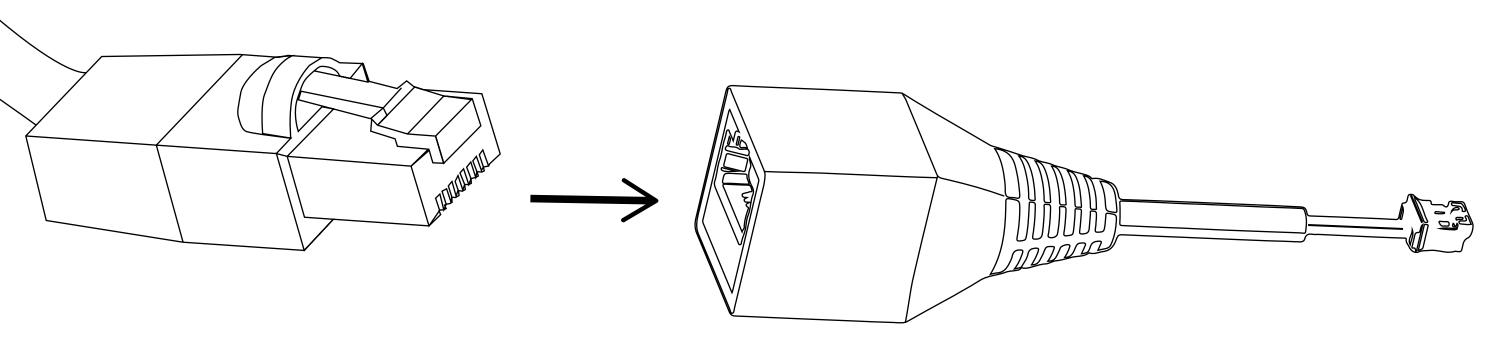

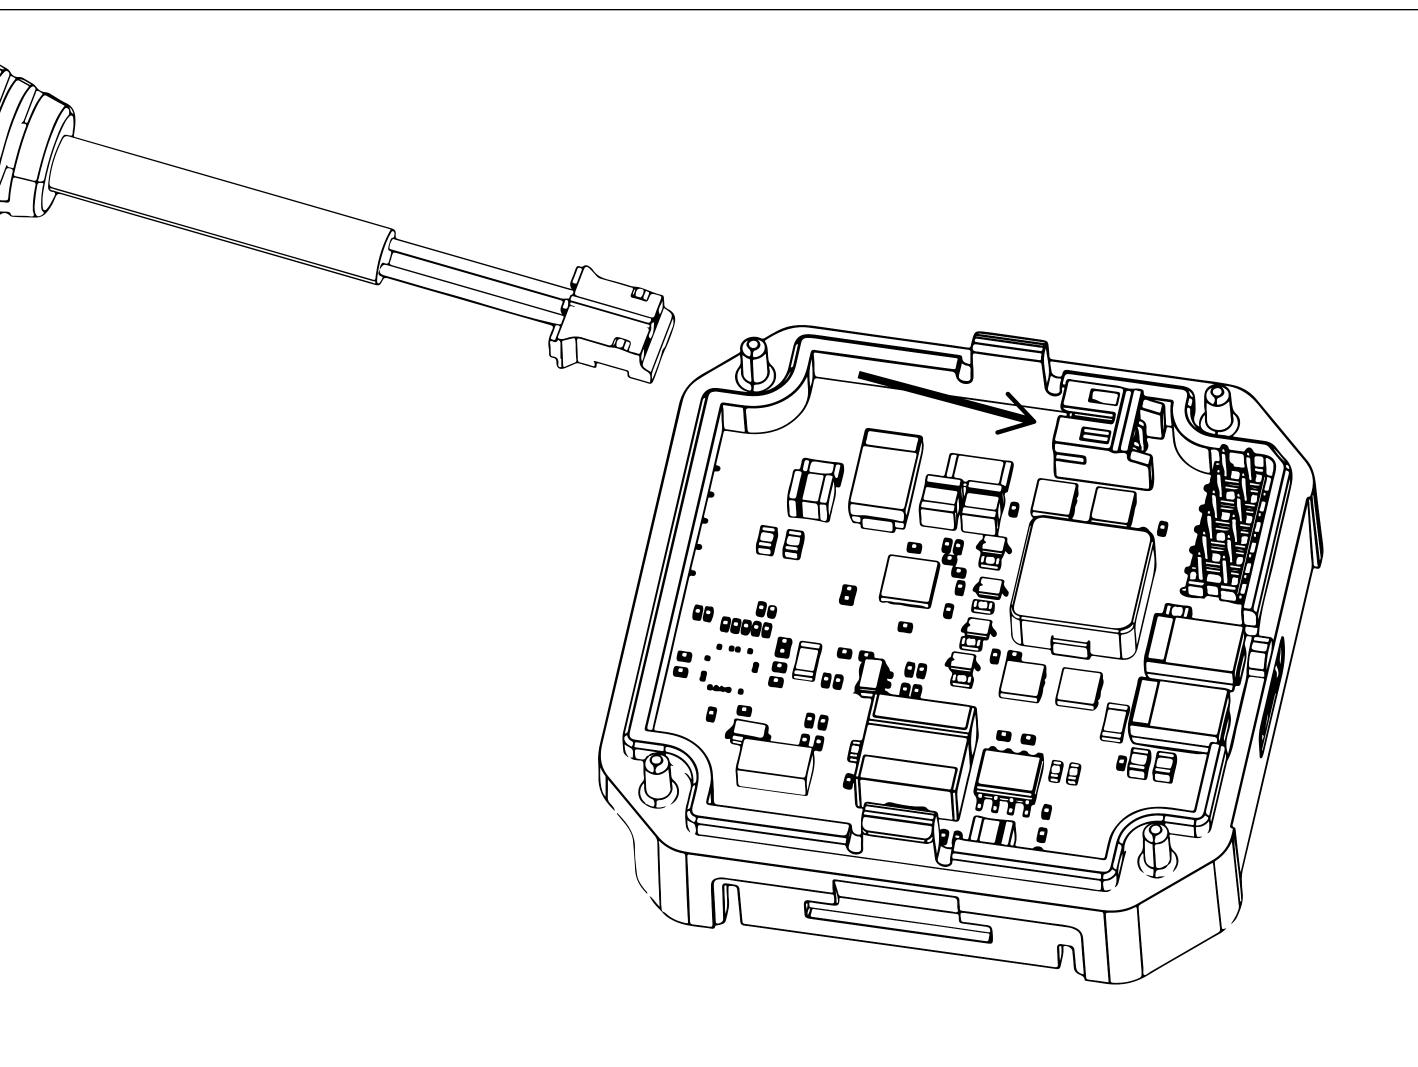


Zip tie the Connector to the DC board for added cable retnetion.

WALLSTATION Existing Constructions Cat6


 Insert the WallStation back into the wall and use the provided screws to attach the WallStation to the wall anchores.


IMPORTANT: Make Sure to position the WallStation with the Up Arrow facing up. Use a leveling tool to level the WallStation and hand tighten the screws.

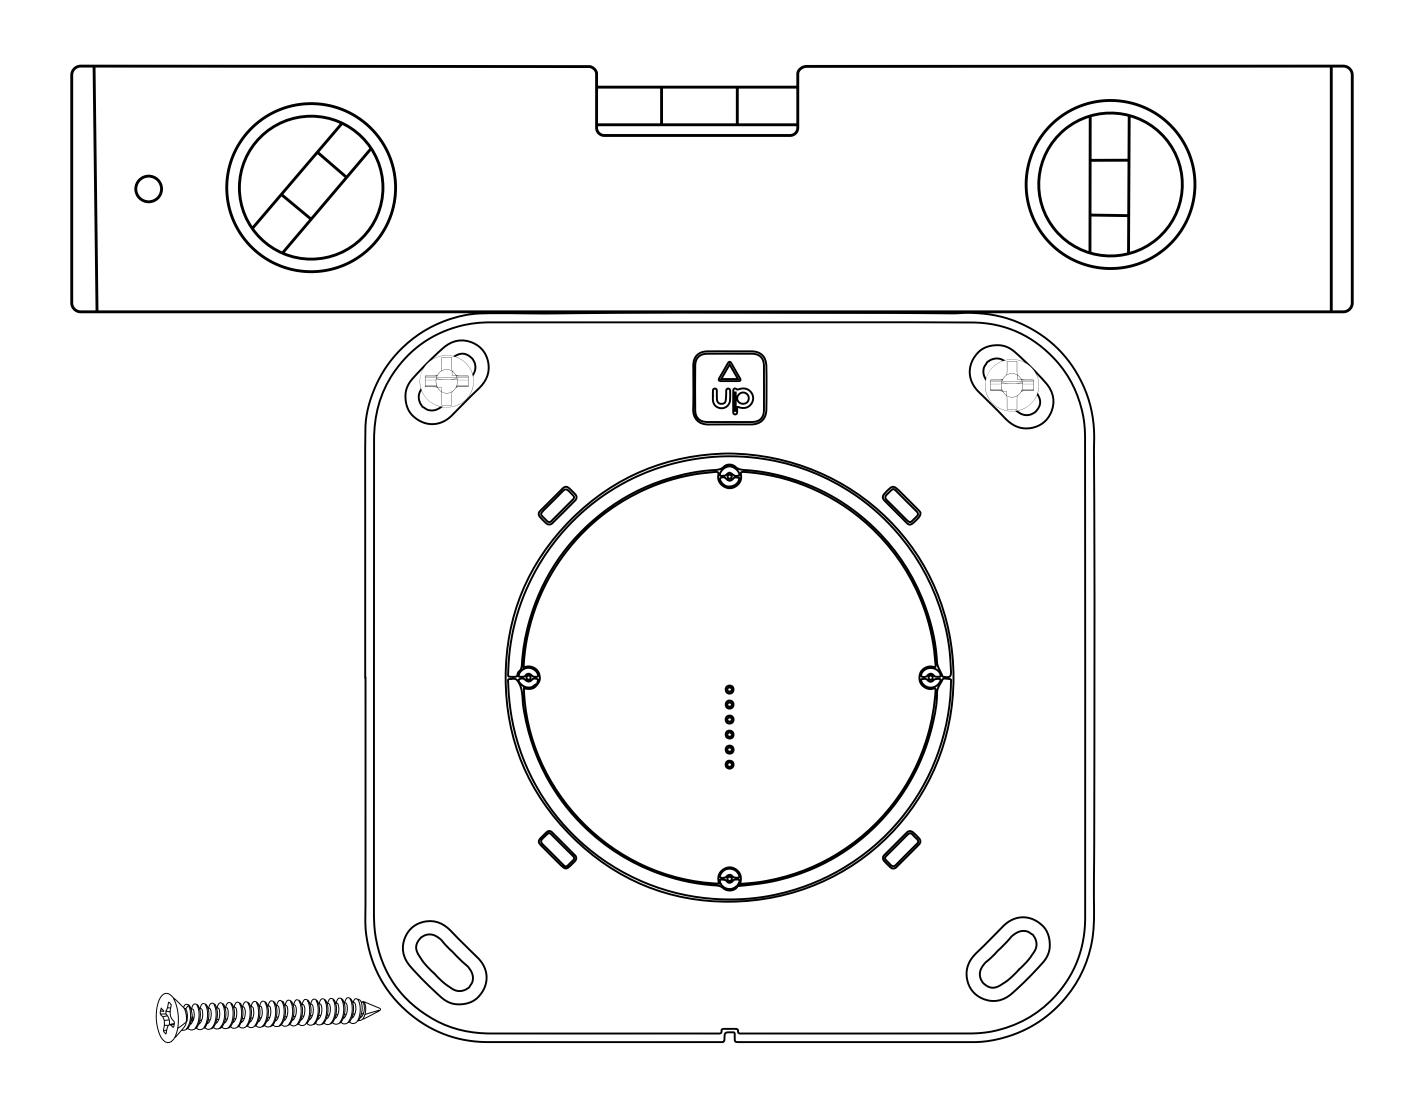

WALLSTATION Existing Constructions Cat6


10. Attach the WallStation Cover Plate over the WallStation making sure to alight the positioning notch with the tooth on the WallStation.

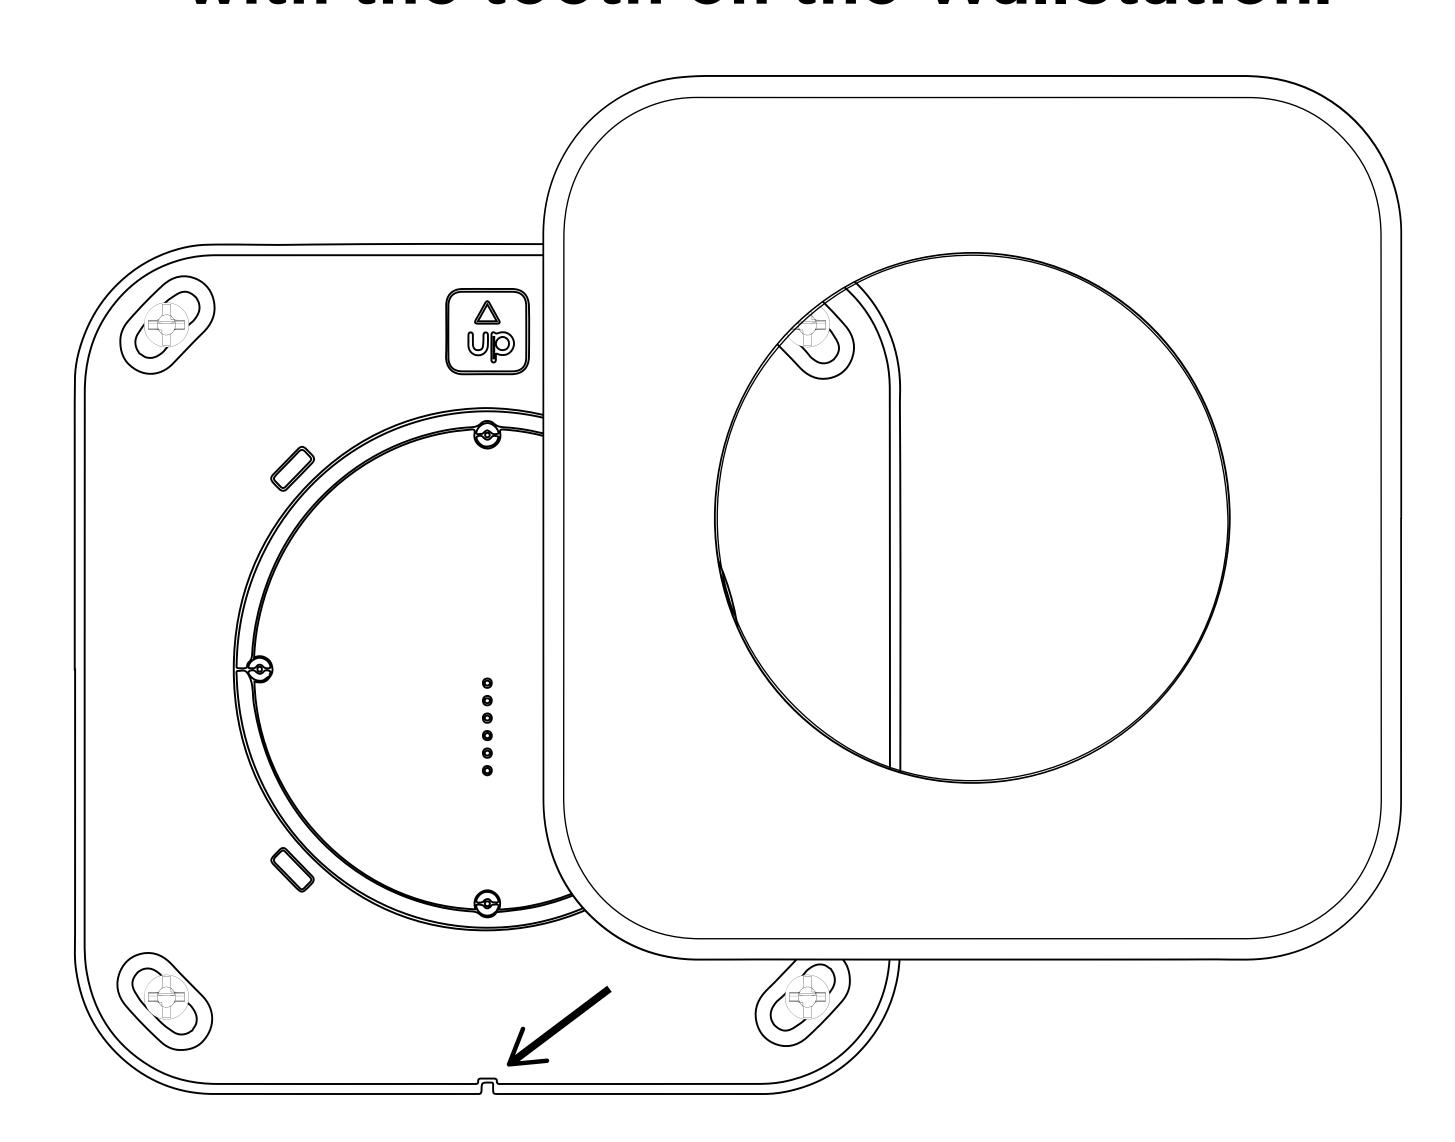

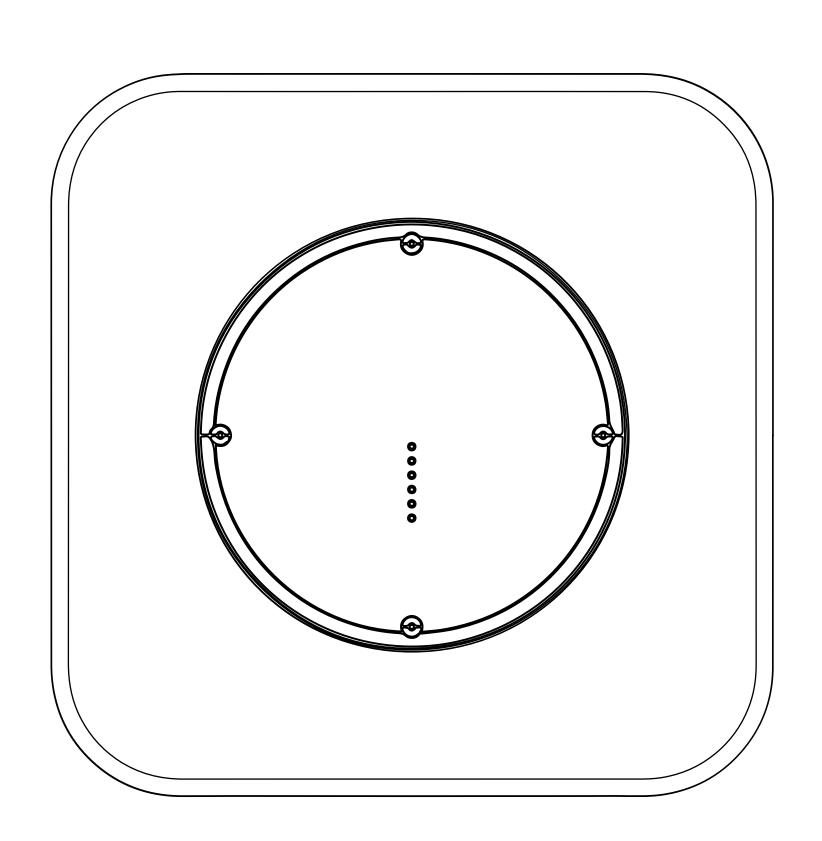


WALLSTATION Existing Constructions Cat6

11. Connect the RJ-45 to DC Connector at the other end of the Cat6 Cable.

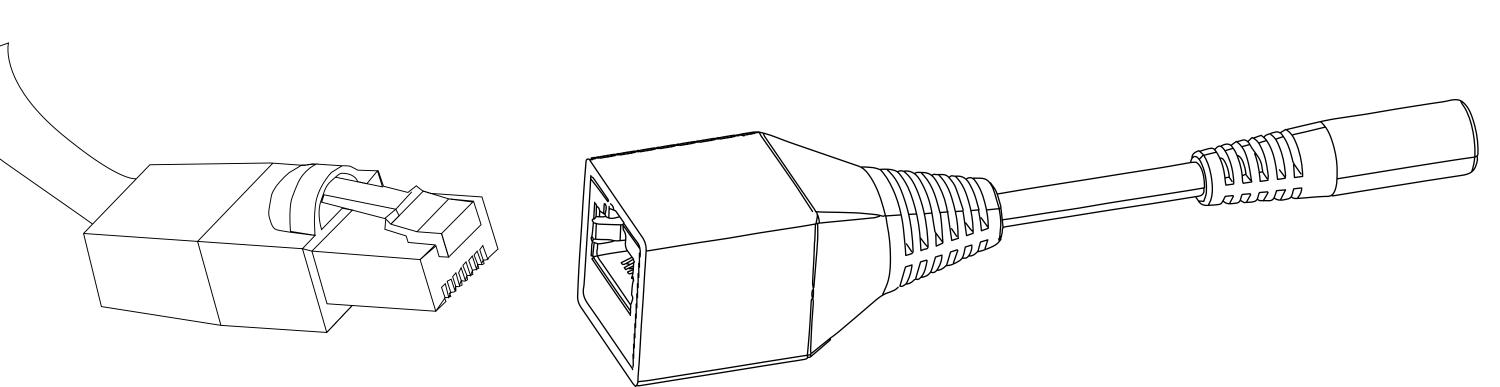


12. Connect the Provided DC Power Adapter into the wall and connect the barrel connector to the other end of of the RJ-45-DC adapter.

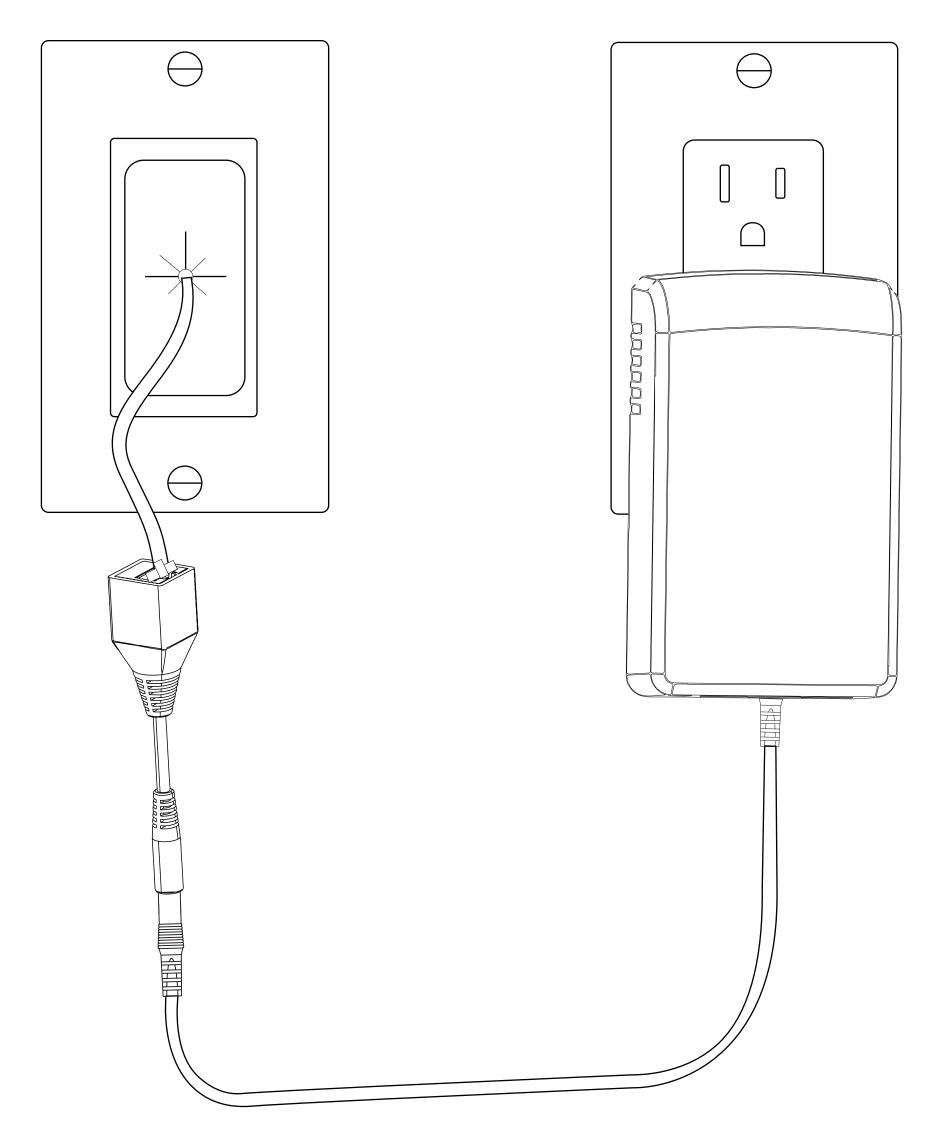

Grommit not included


WALLSTATION

For a clean finished look place the Connector and DC barrel plug back throug the grommit into the wall.

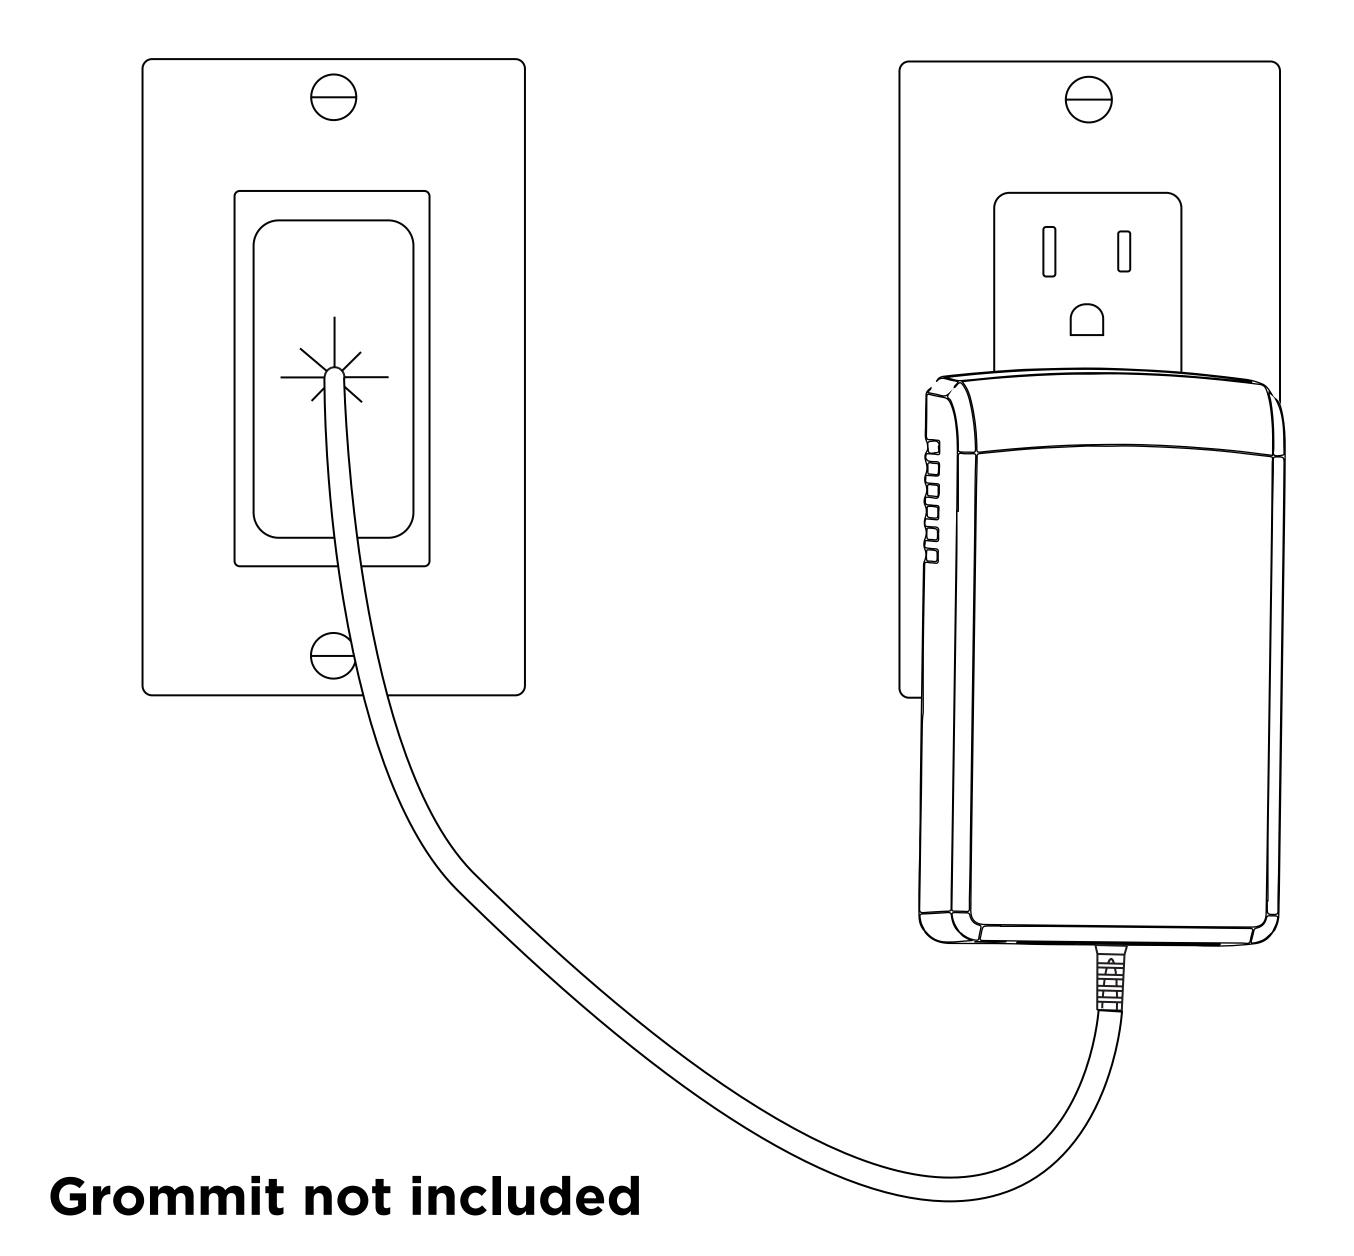

WALLSTATION Existing Constructions Cat6

13. Place a Case with an iPad installed onto the WallStation to determine power was installed properly and the iPad charges.

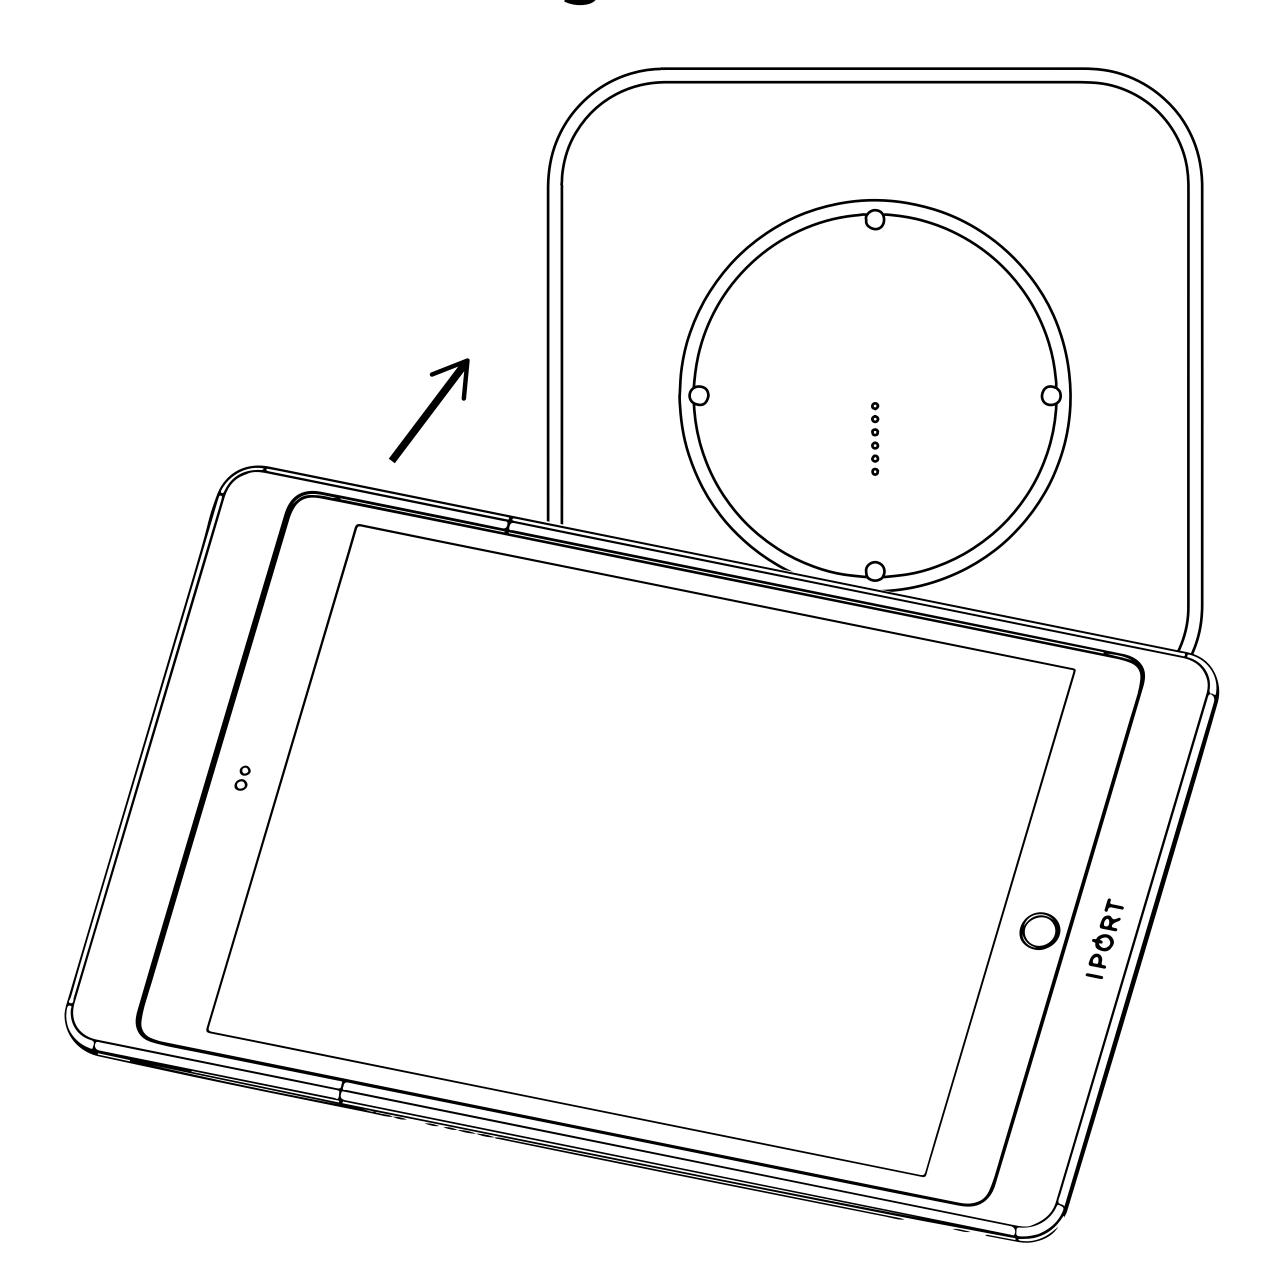


COMPLETE

WALLSTATION


Upgrading a LAUNCH WallStation to CONNECT PRO

1. Remove the old LAUNCH WallStation from the wall making sure to keep the existing anchors installed into the wall.

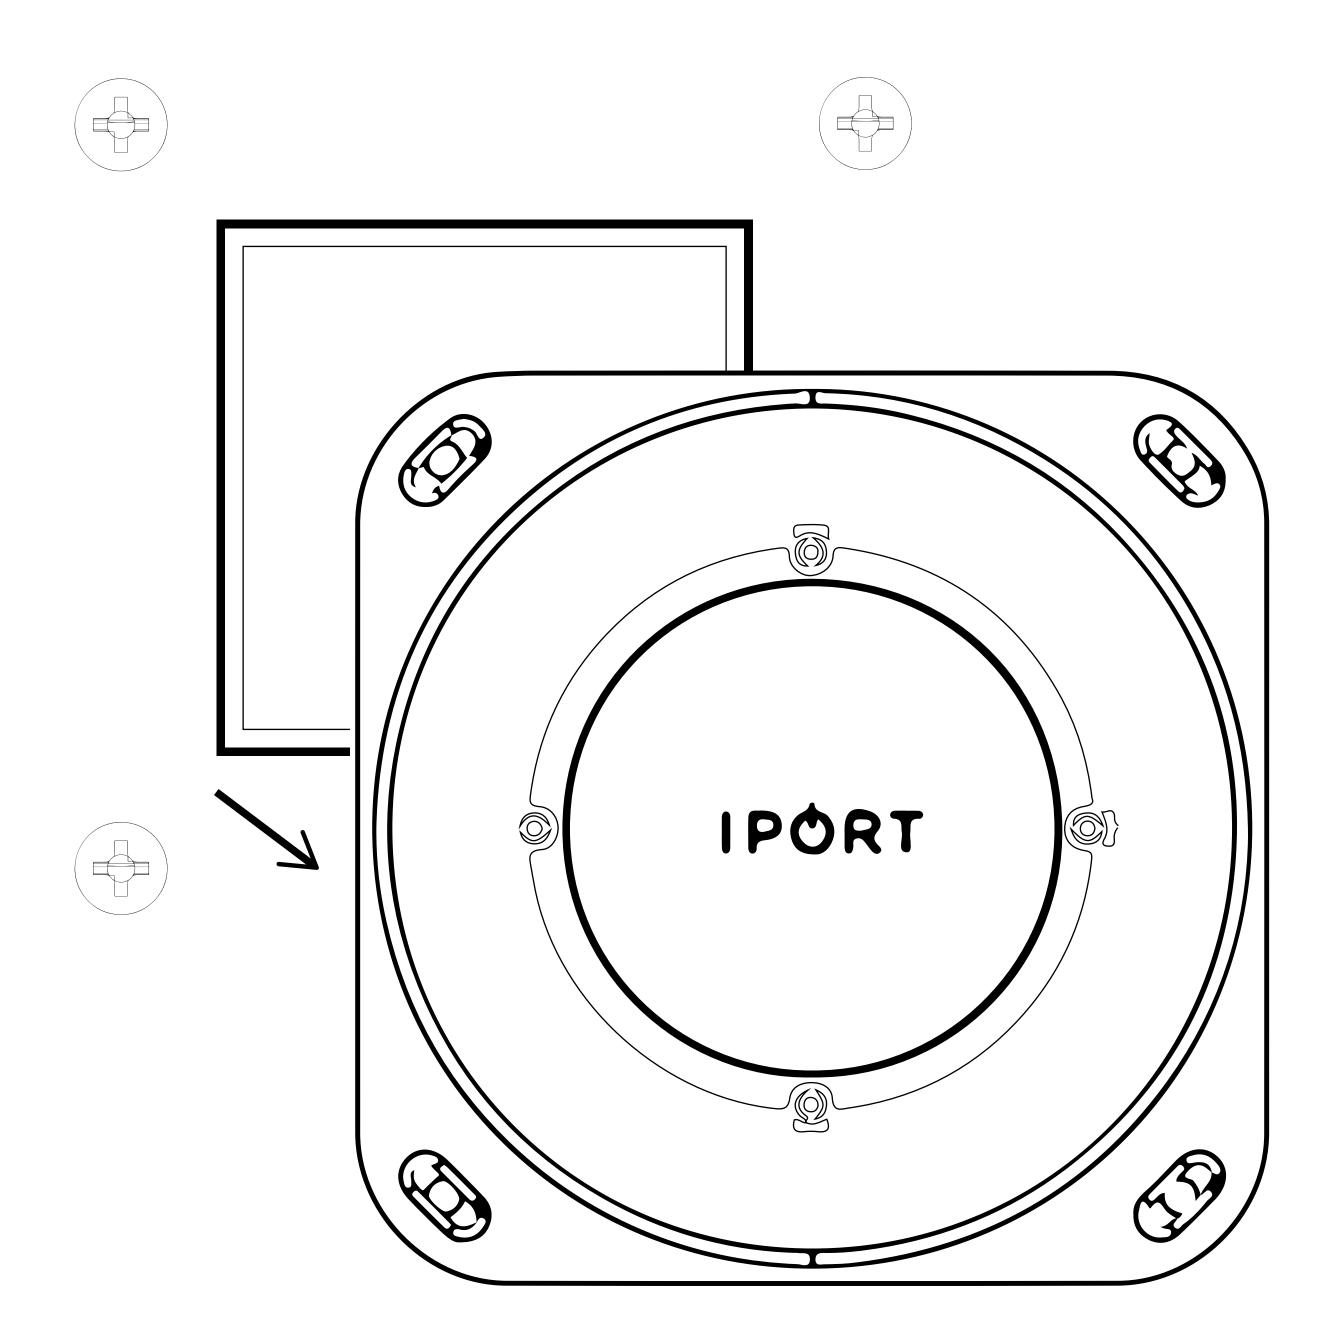


WALLSTATION Upgradeing LAUNCH WallStation


2. Disconnect the two wires in the wall from the green phoenix connector

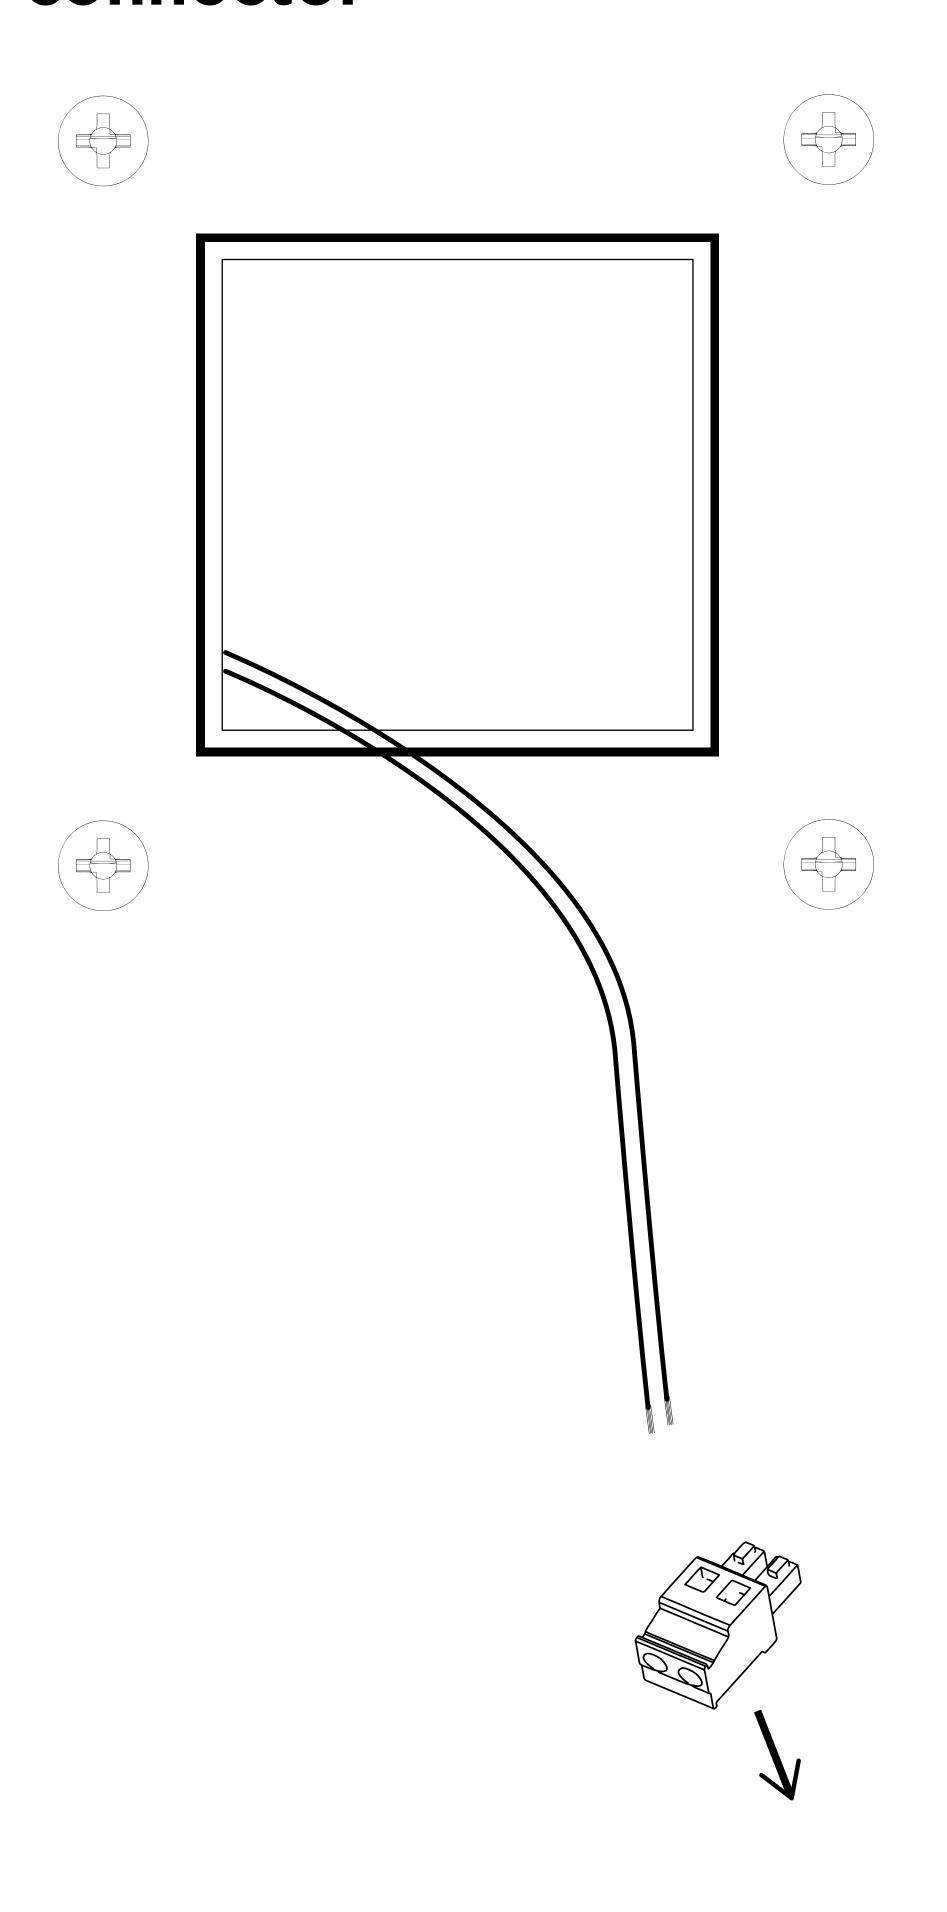

WALLSTATION Upgradeing LAUNCH WallStation

3. Connect the TE-Phoenix connector to the existing wire ran in the wall. Next connect the TE cable into the back of the white TE Connector on the WallStation DC Adapter.

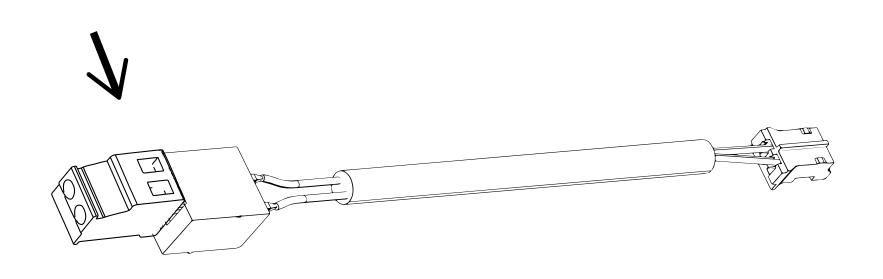


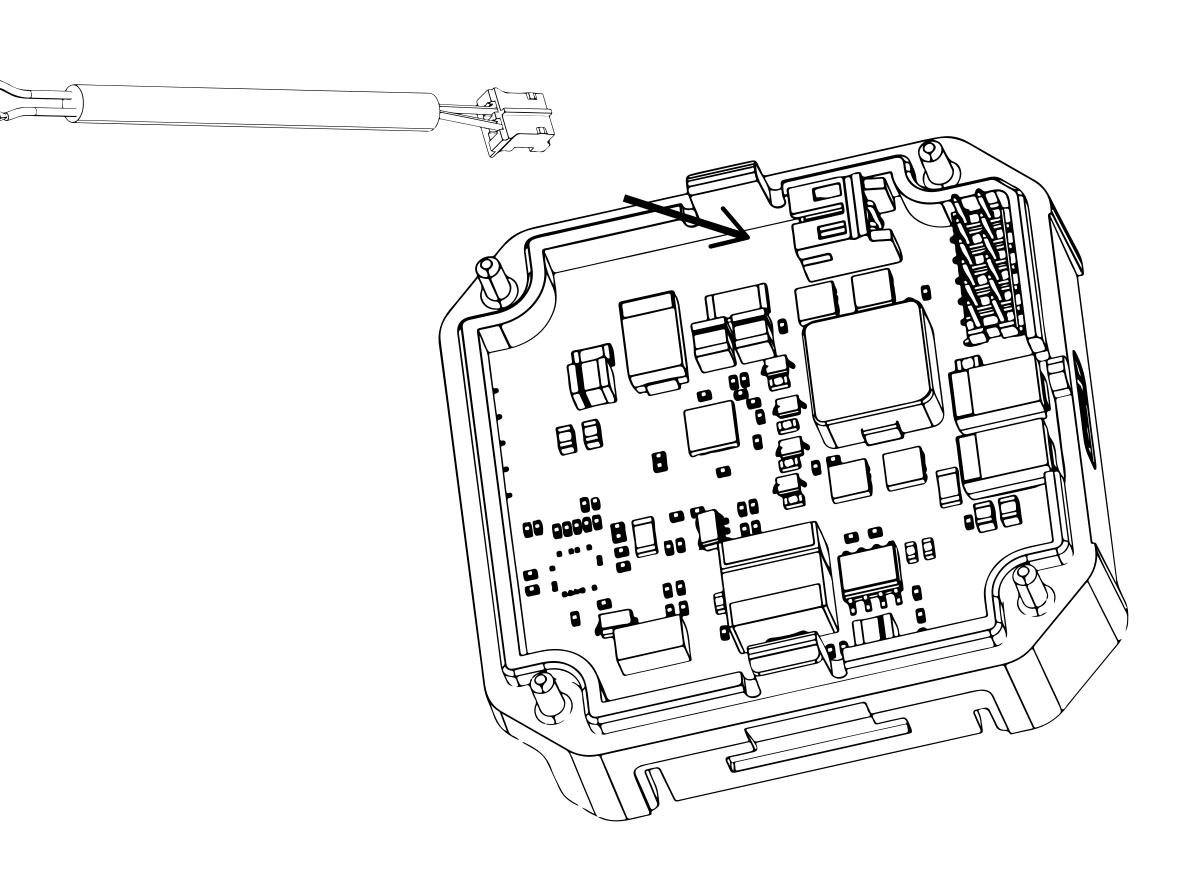

Zip tie the Connector to the DC board for added cable retnetion.


WALLSTATION Upgradeing LAUNCH WallStation

4. Insert the CONNECT WallStation into the wall opening from the previous LAUNCH WallStation. IMPORTANT: Make Sure to position the WallStation with the Up Arrow facing up. Use a leveling tool to level the WallStation.

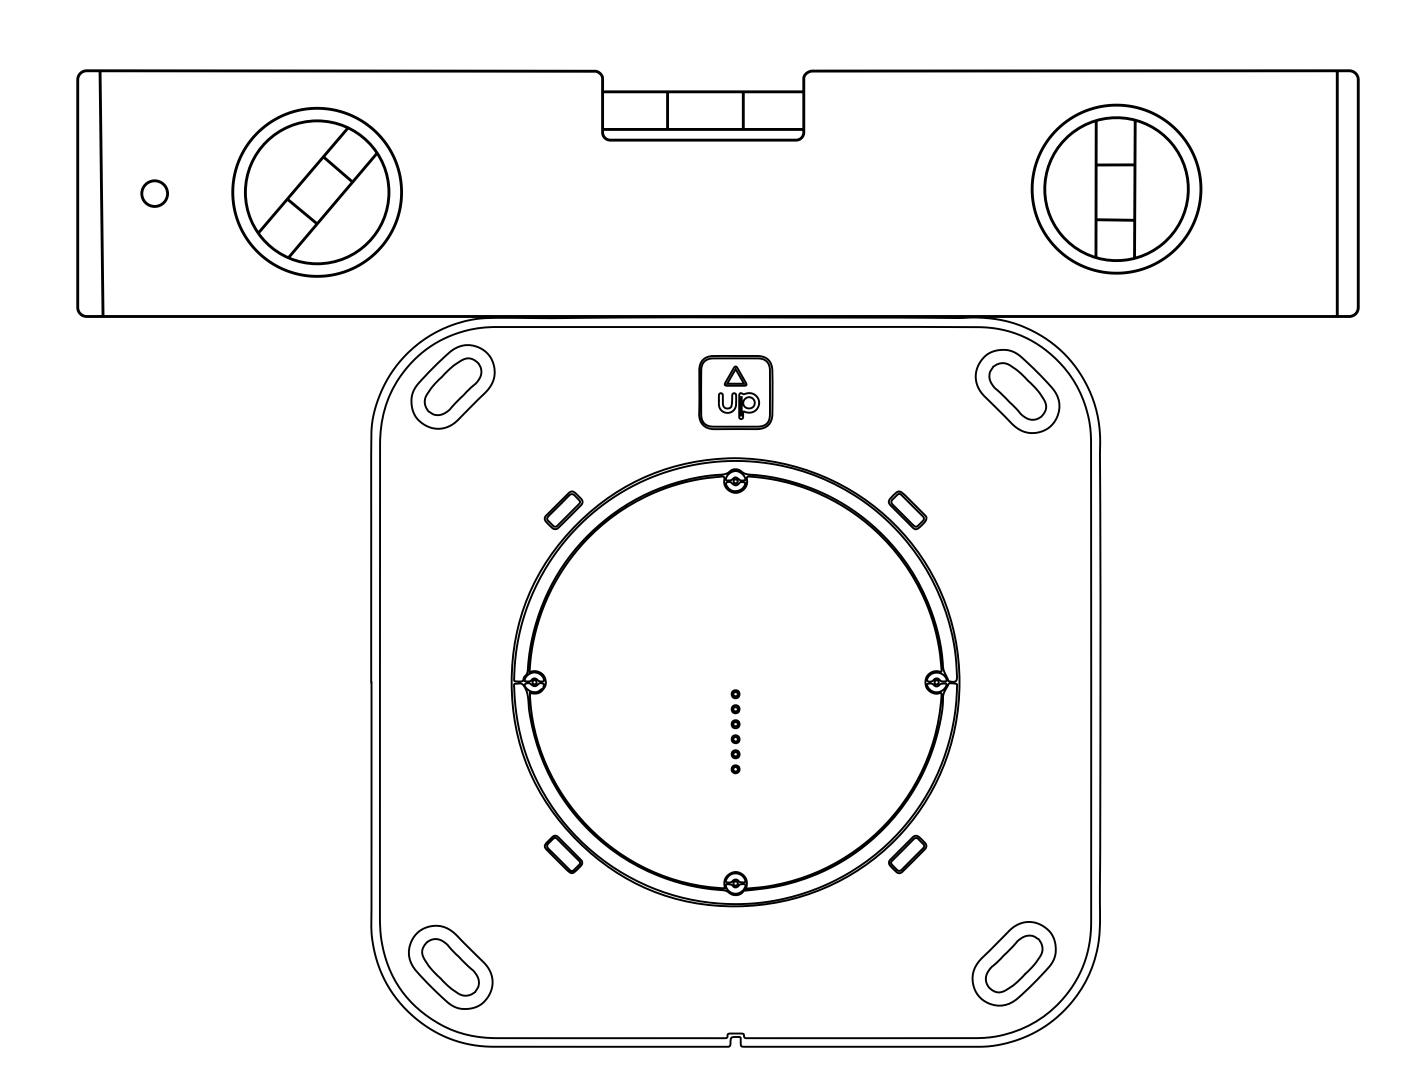


WALLSTATION Upgradeing LAUNCH WallStation


5. Use the old screws or provided screws to attach the WallStation to the preinstalled anchors

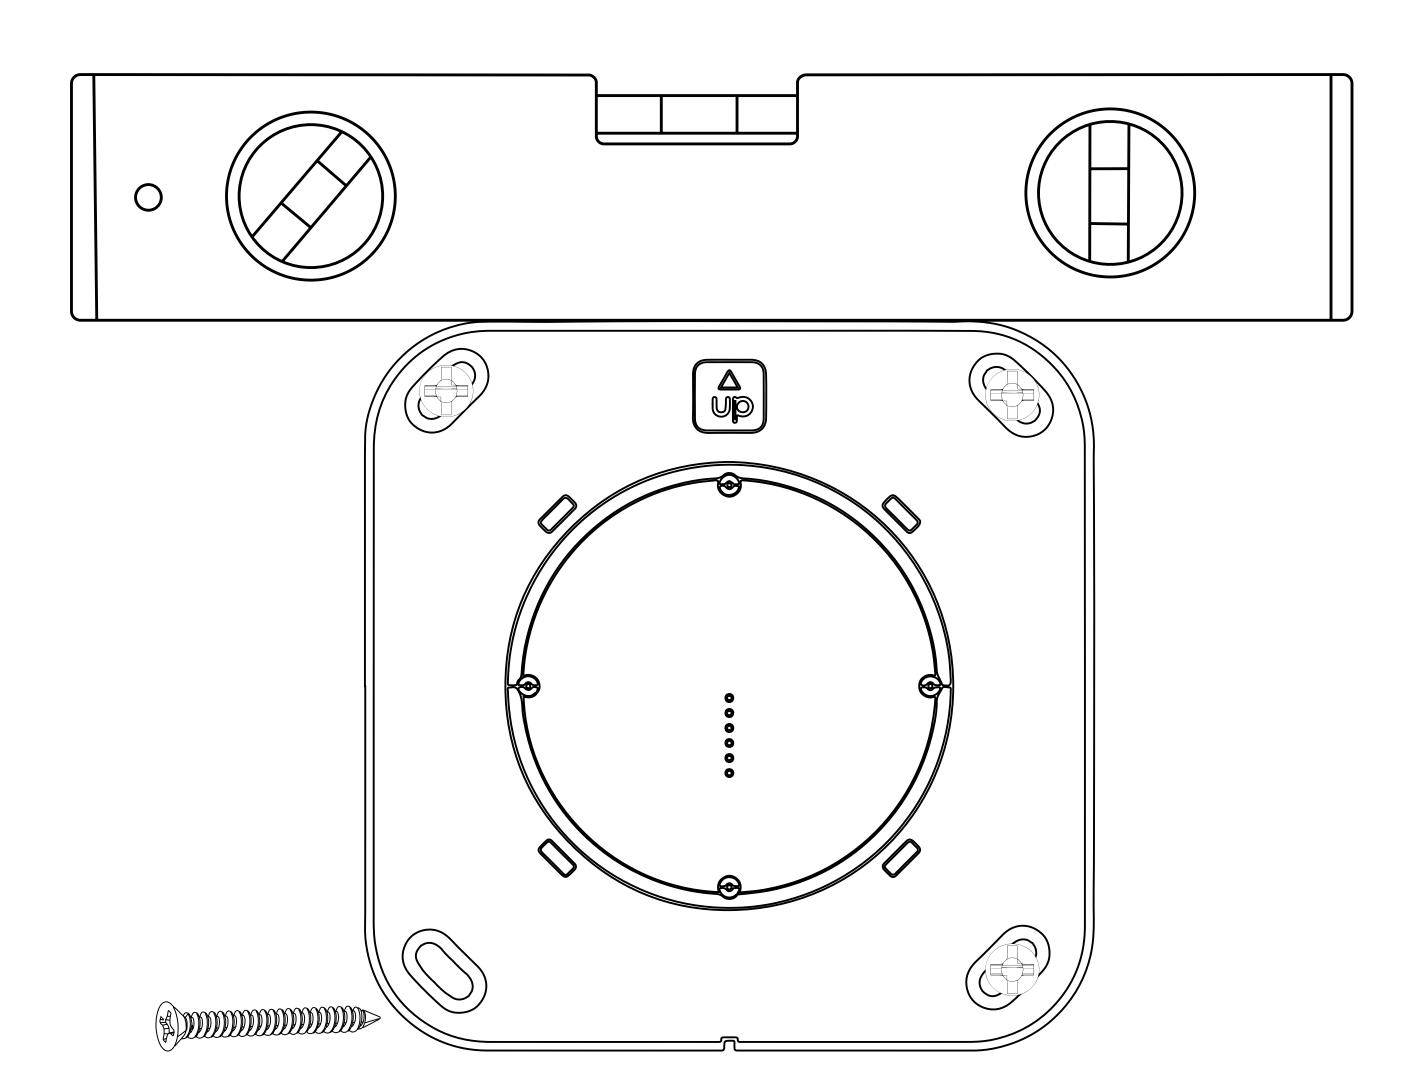

WALLSTATION Upgradeing LAUNCH WallStation


6. Attach the WallStation Cover Plate over the WallStation making sure to alight the positioning notch with the tooth on the WallStation.

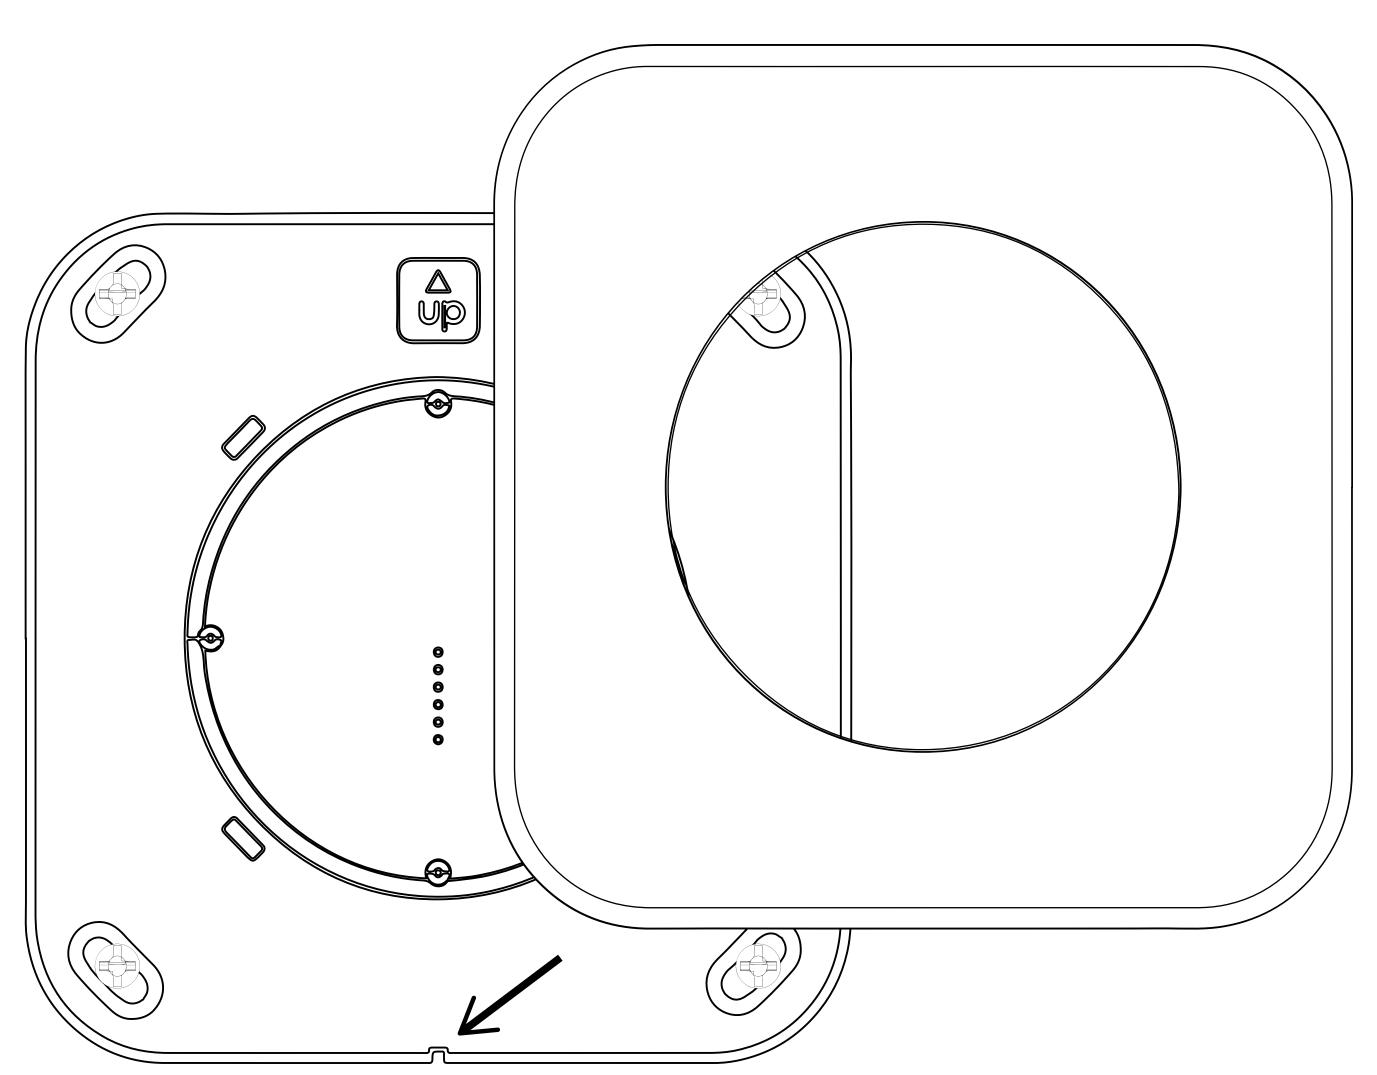

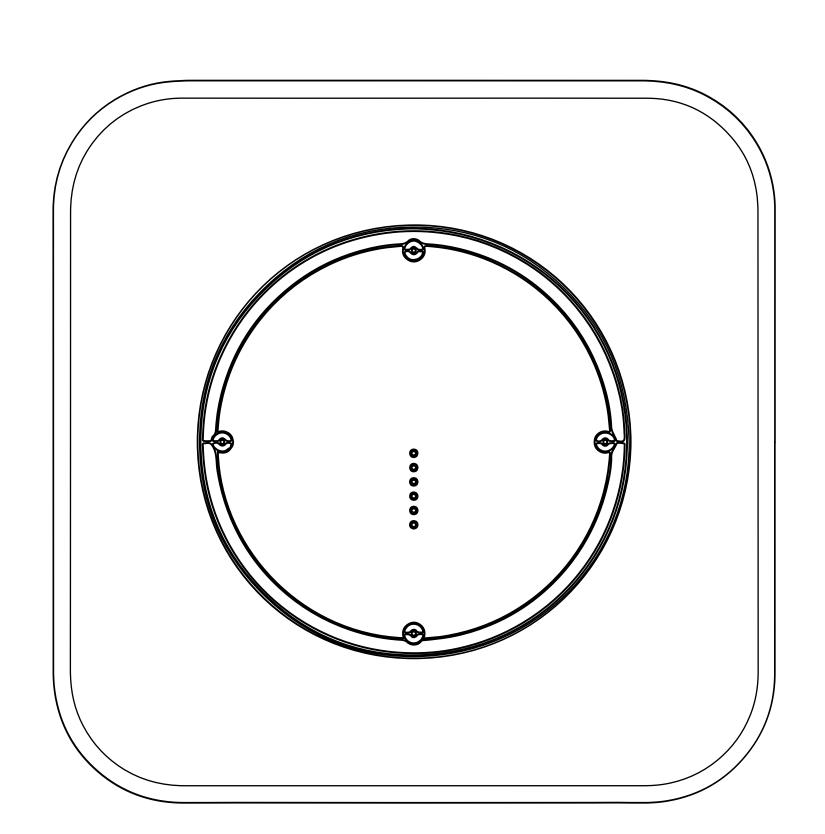

WALLSTATION Upgradeing LAUNCH WallStation

7. Place a Case with an iPad installed onto the WallStation to determine power was installed properly and the iPad charges.

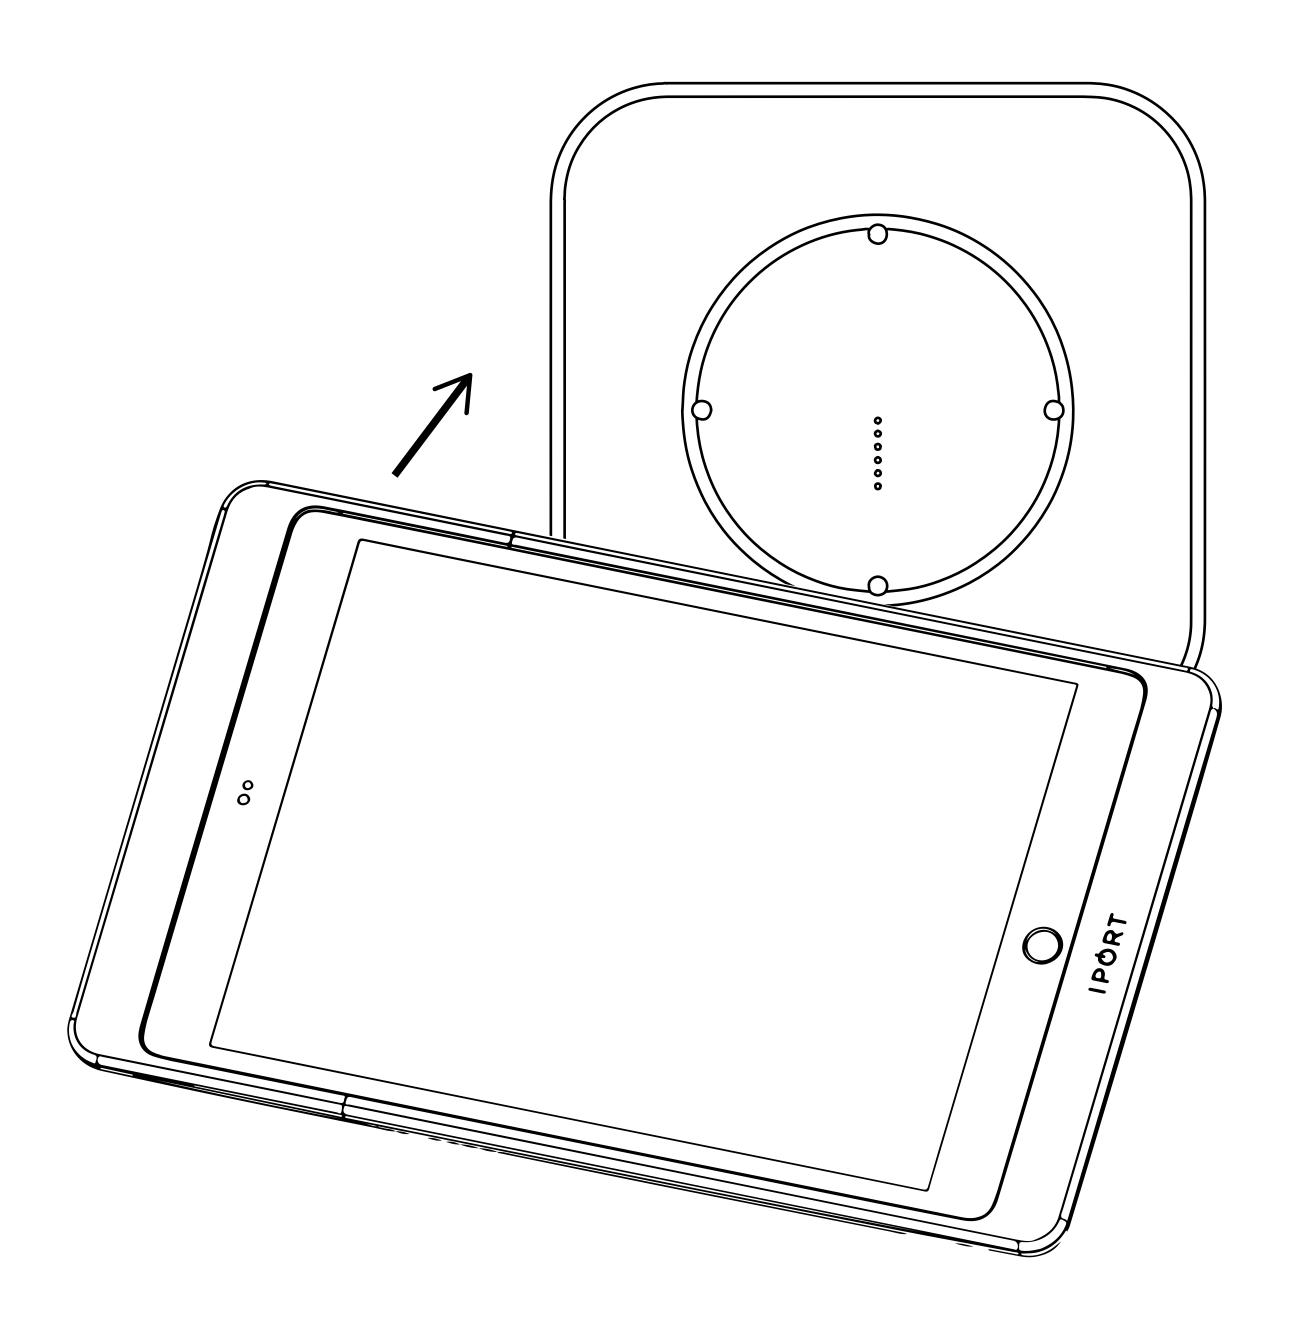


COMPLETE

WALLSTATION

IPORT CONNECT Pro WallStation Install New Construction - 2 Wire


Before Construction is complete

1. Determine the desired location of the IPORT Connect Pro WallStation will live when the construction is completed.

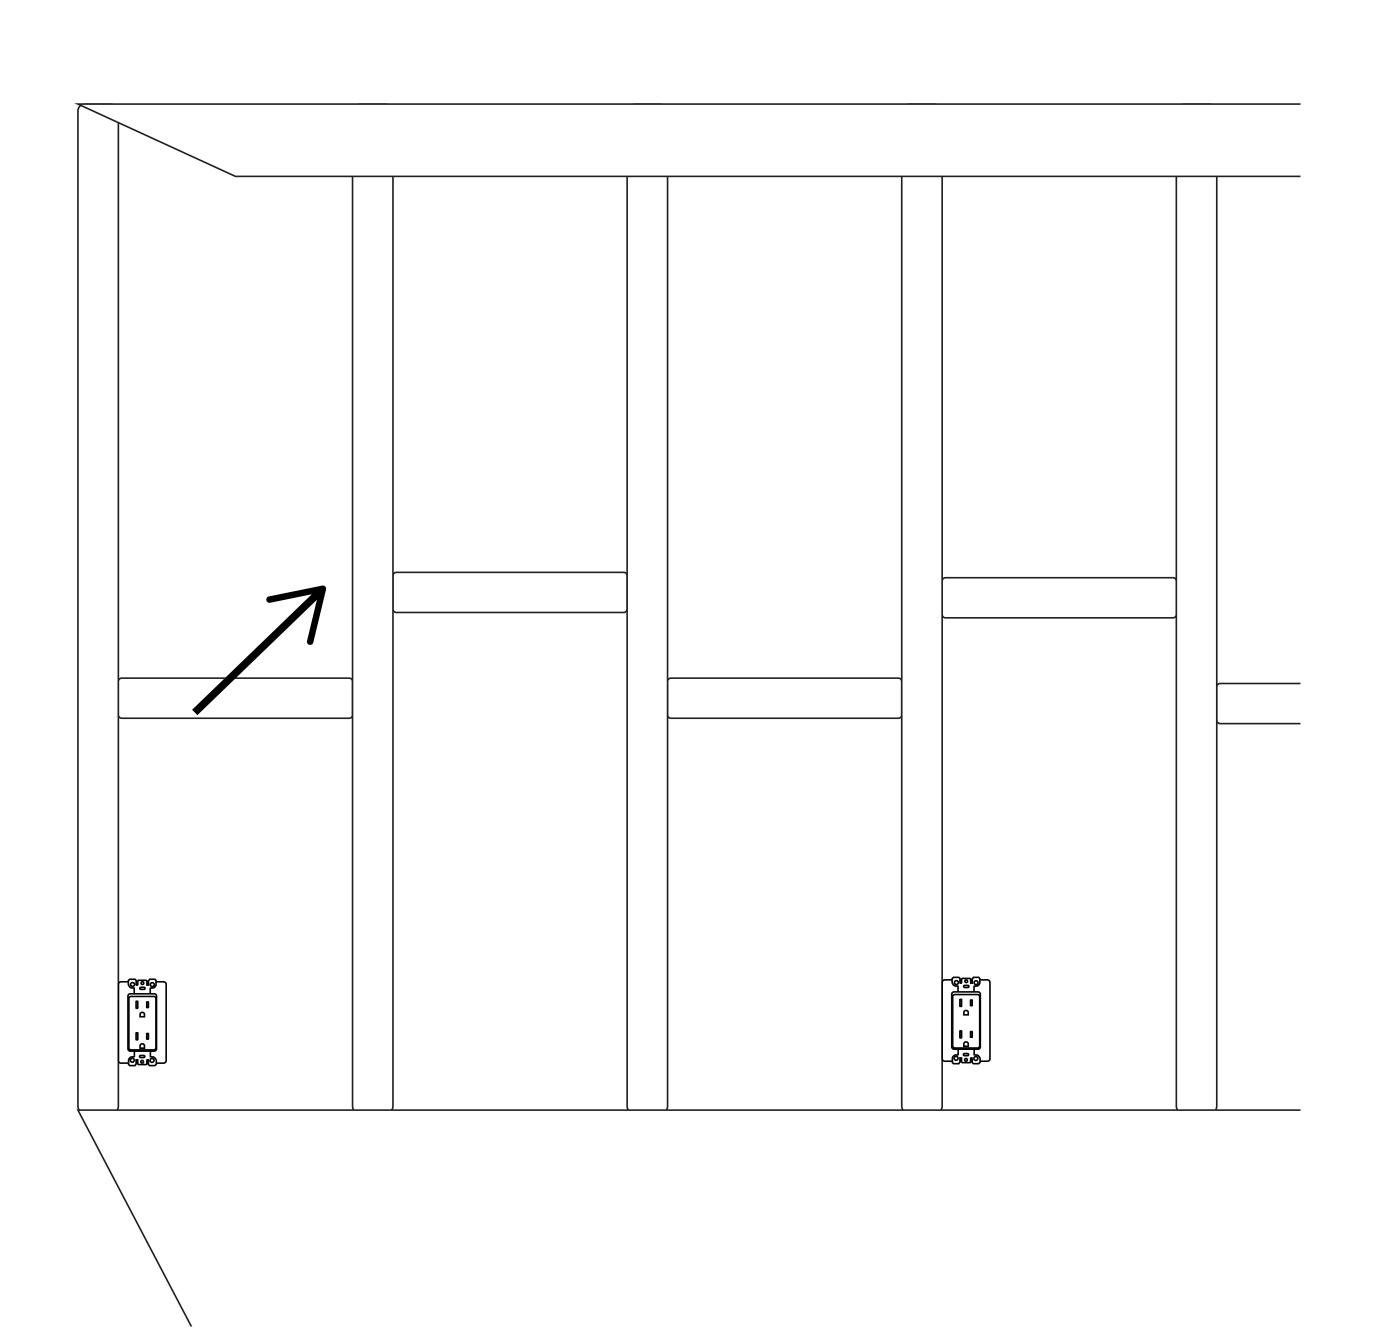



WALLSTATION New Construction - 2 Wire

 Install a 1 Gang electrical box or low voltage ring in the desired location of the WallStation.

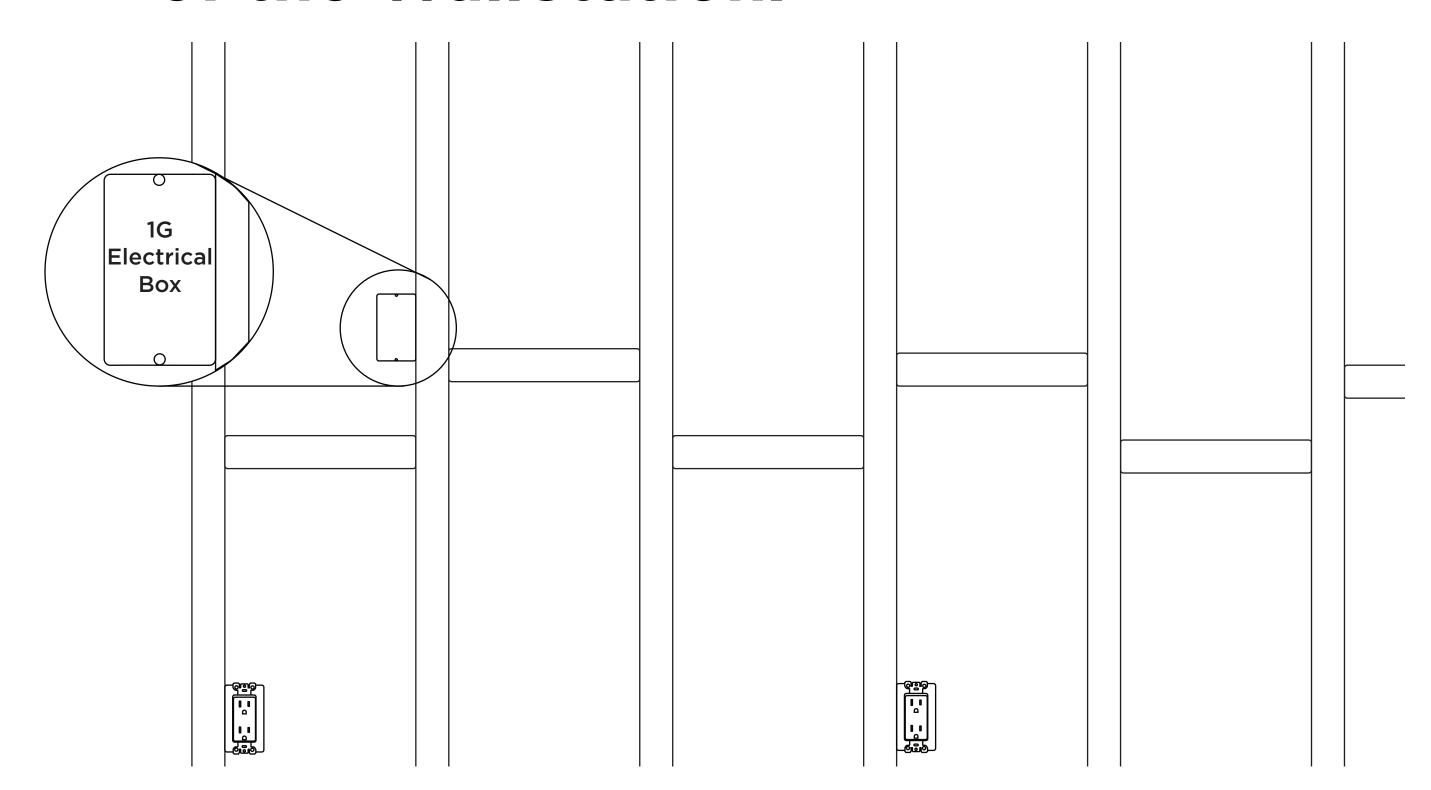

NOTE: The CONNECT PRO WallStation will cover a 1G electrical box only. A 2 Gang electrical box will interfere with the mounting hardware.

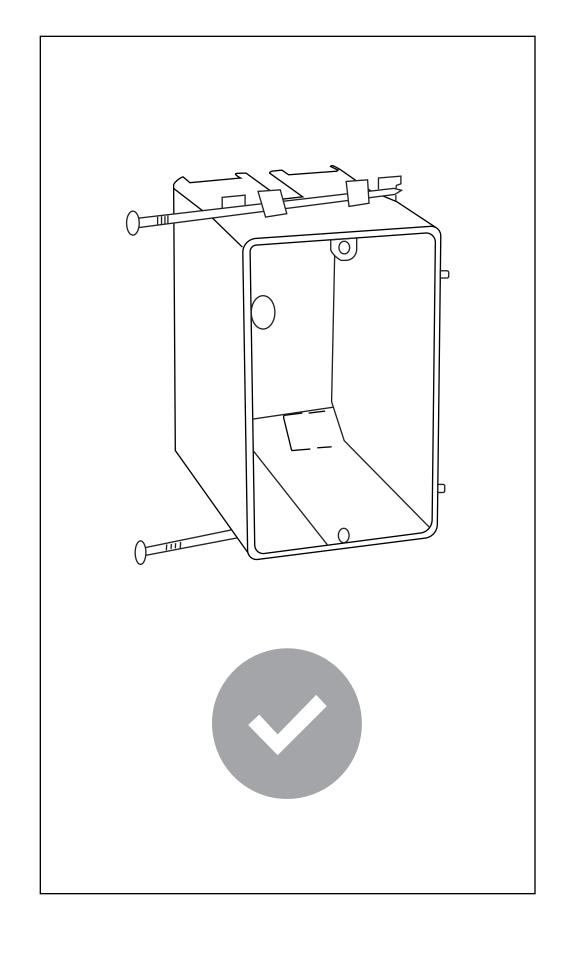


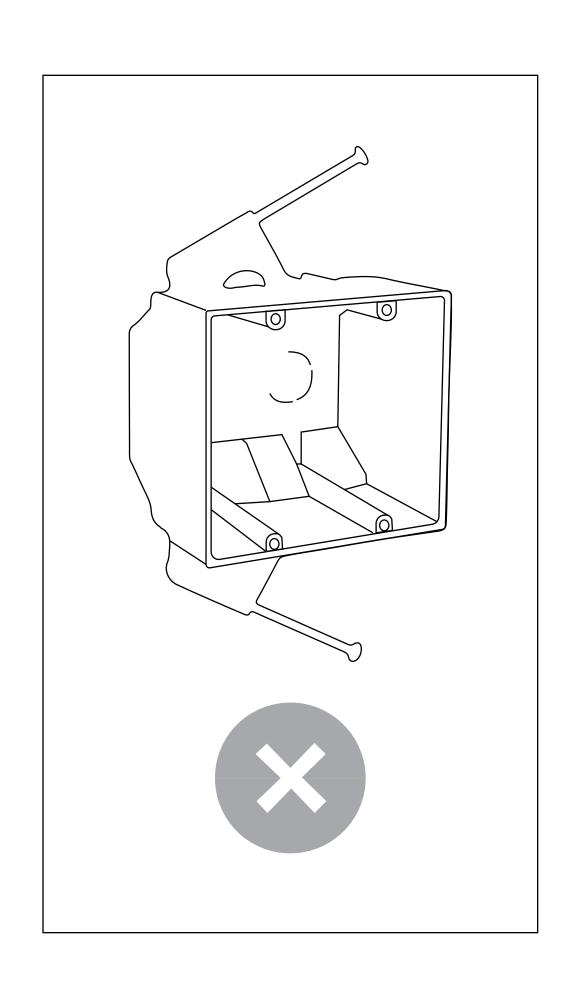

WALLSTATION New Construction - 2 Wire

4. Run a 14AWG 2 wire cable from the WallStation location to a nearby AC outlet, closet, or network rack location.

NOTE: Make sure to secure the 2 Wire cable appropriately onto the Electrical box or Low Voltage ring to retrieve at a later time.

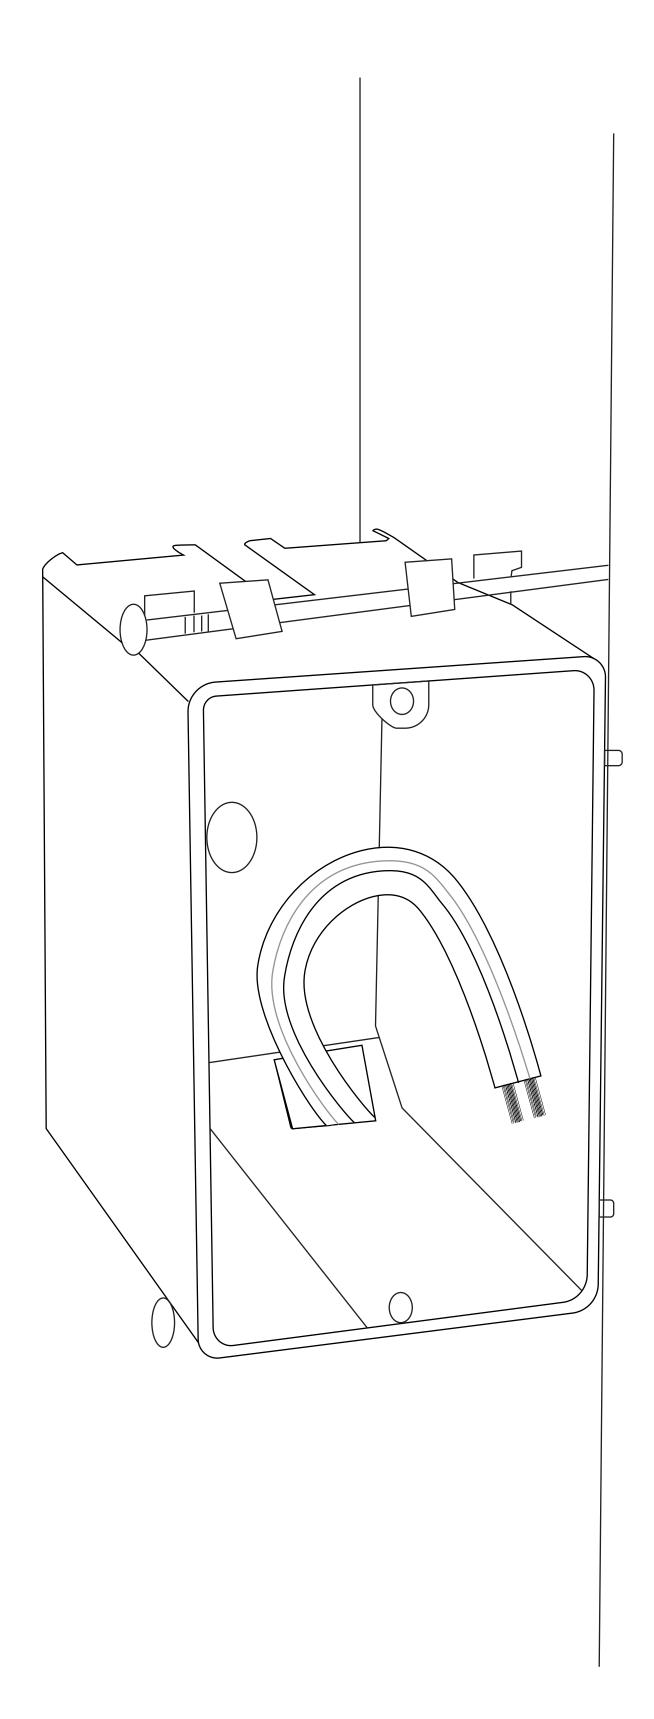



IPORT CONNECT


WALLSTATION New Construction - 2 Wire

Installing the WallStation After Construction

 Locte the 1 gang boxed saved for the wallstation and locte the end of the 2 wire for power.

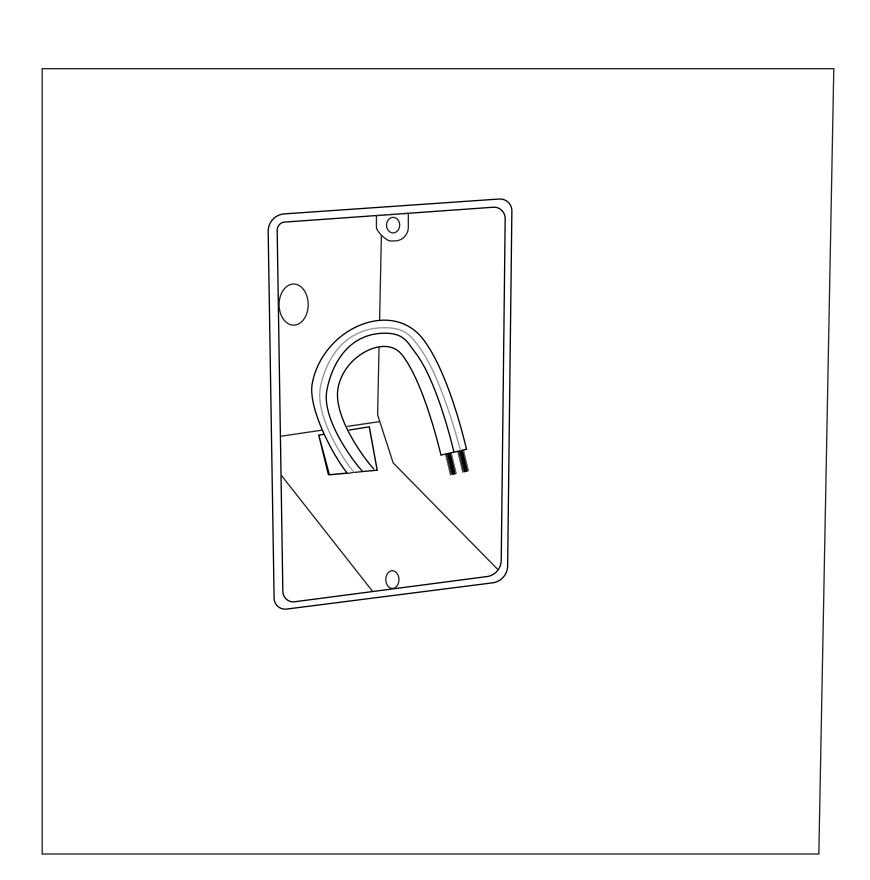

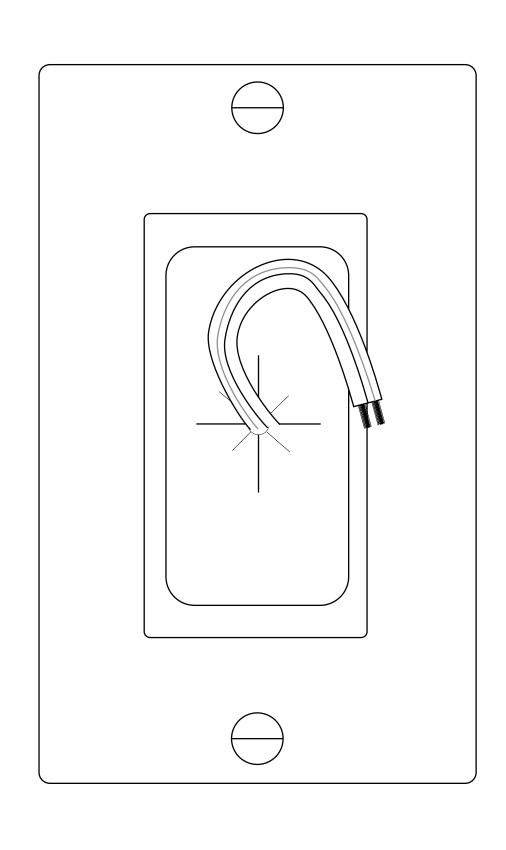


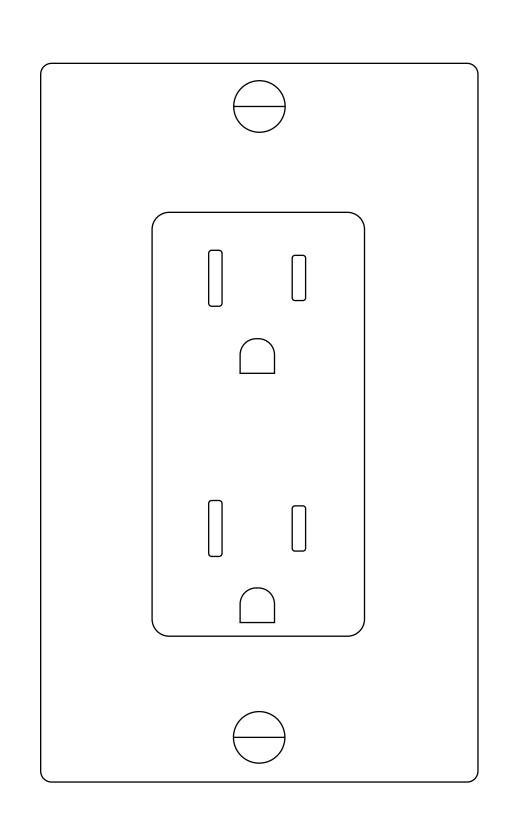


Grommit not included

WALLSTATION New Construction - 2 Wire

2. Remove the WallSation, Drywall anchors and Screws from the box and place on a table.

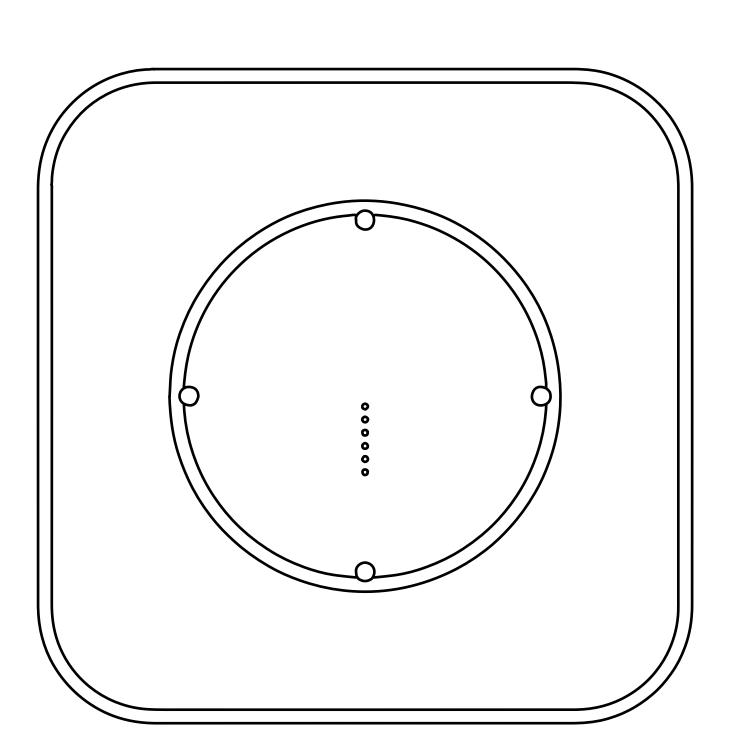


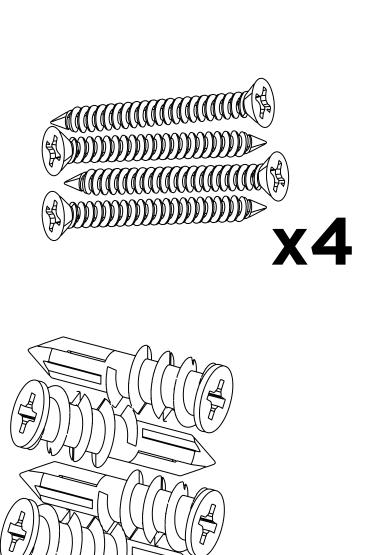

WALLSTATION New Construction - 2 Wire


4. Insert the WallStation into the 1G box.

NOTE: the 1G box or Low voltage ring was used to save the space of the WallStation. The WallStation was designed to be use without the need for a junction box. If possible remove the junction box or Low voltage ring.

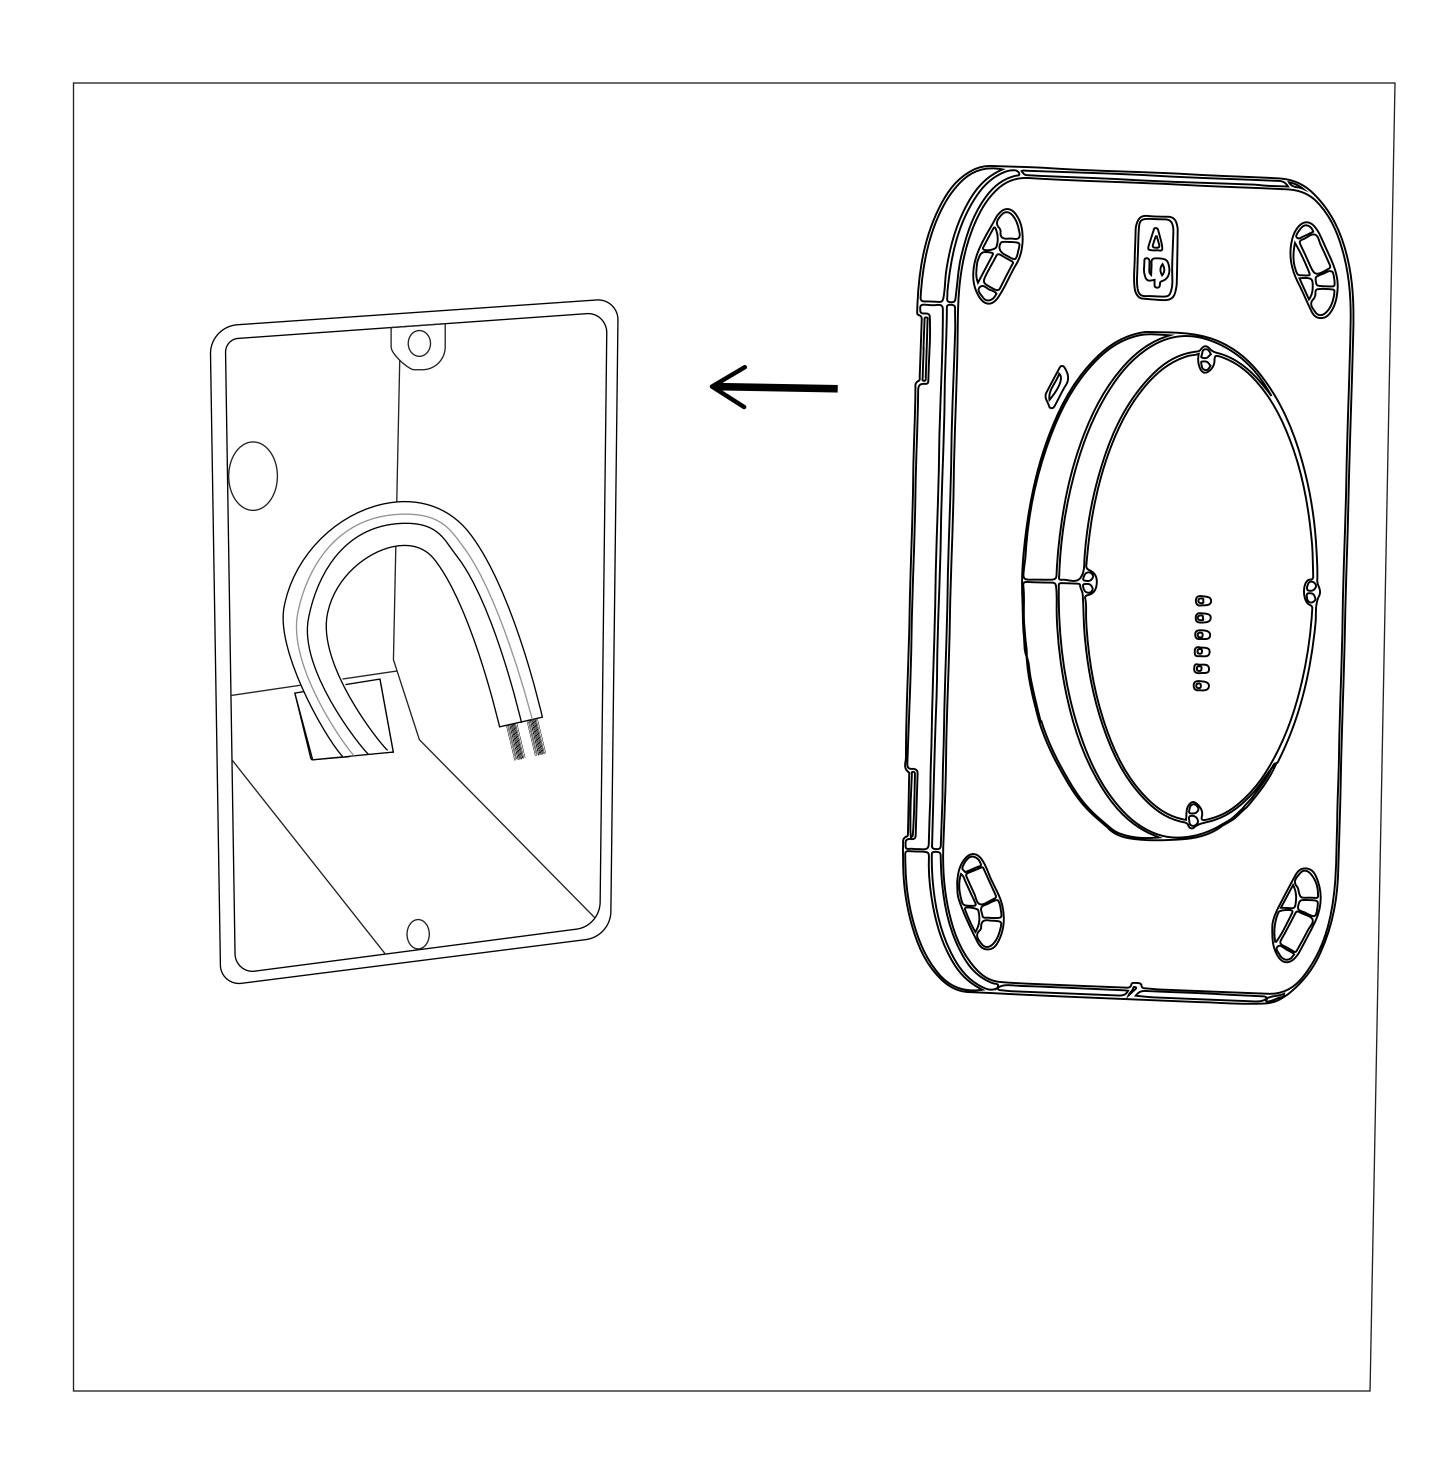


WALLSTATION New Construction - 2 Wire

5. Use a leveling tool to level the WallStation and mark the 4 locations for the provided Anchors. Remove the WallStation from the 1G Box.

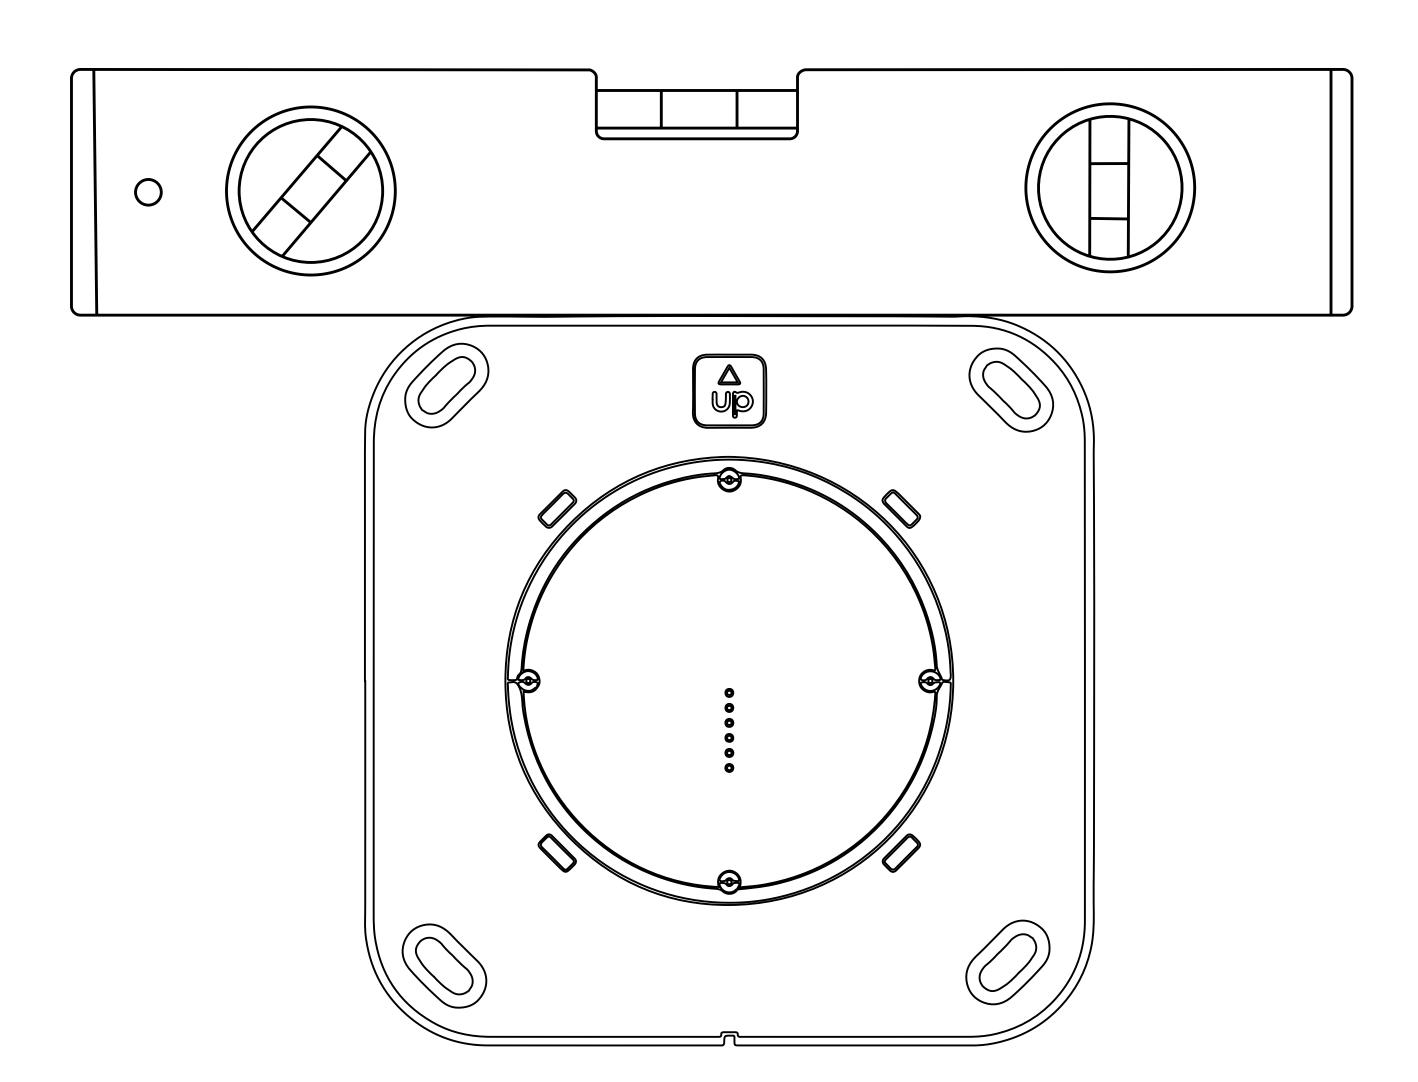


WALLSTATION New Construction - 2 Wire


 Remove the Wall Station and screw the provided anchors into the wall where marked.

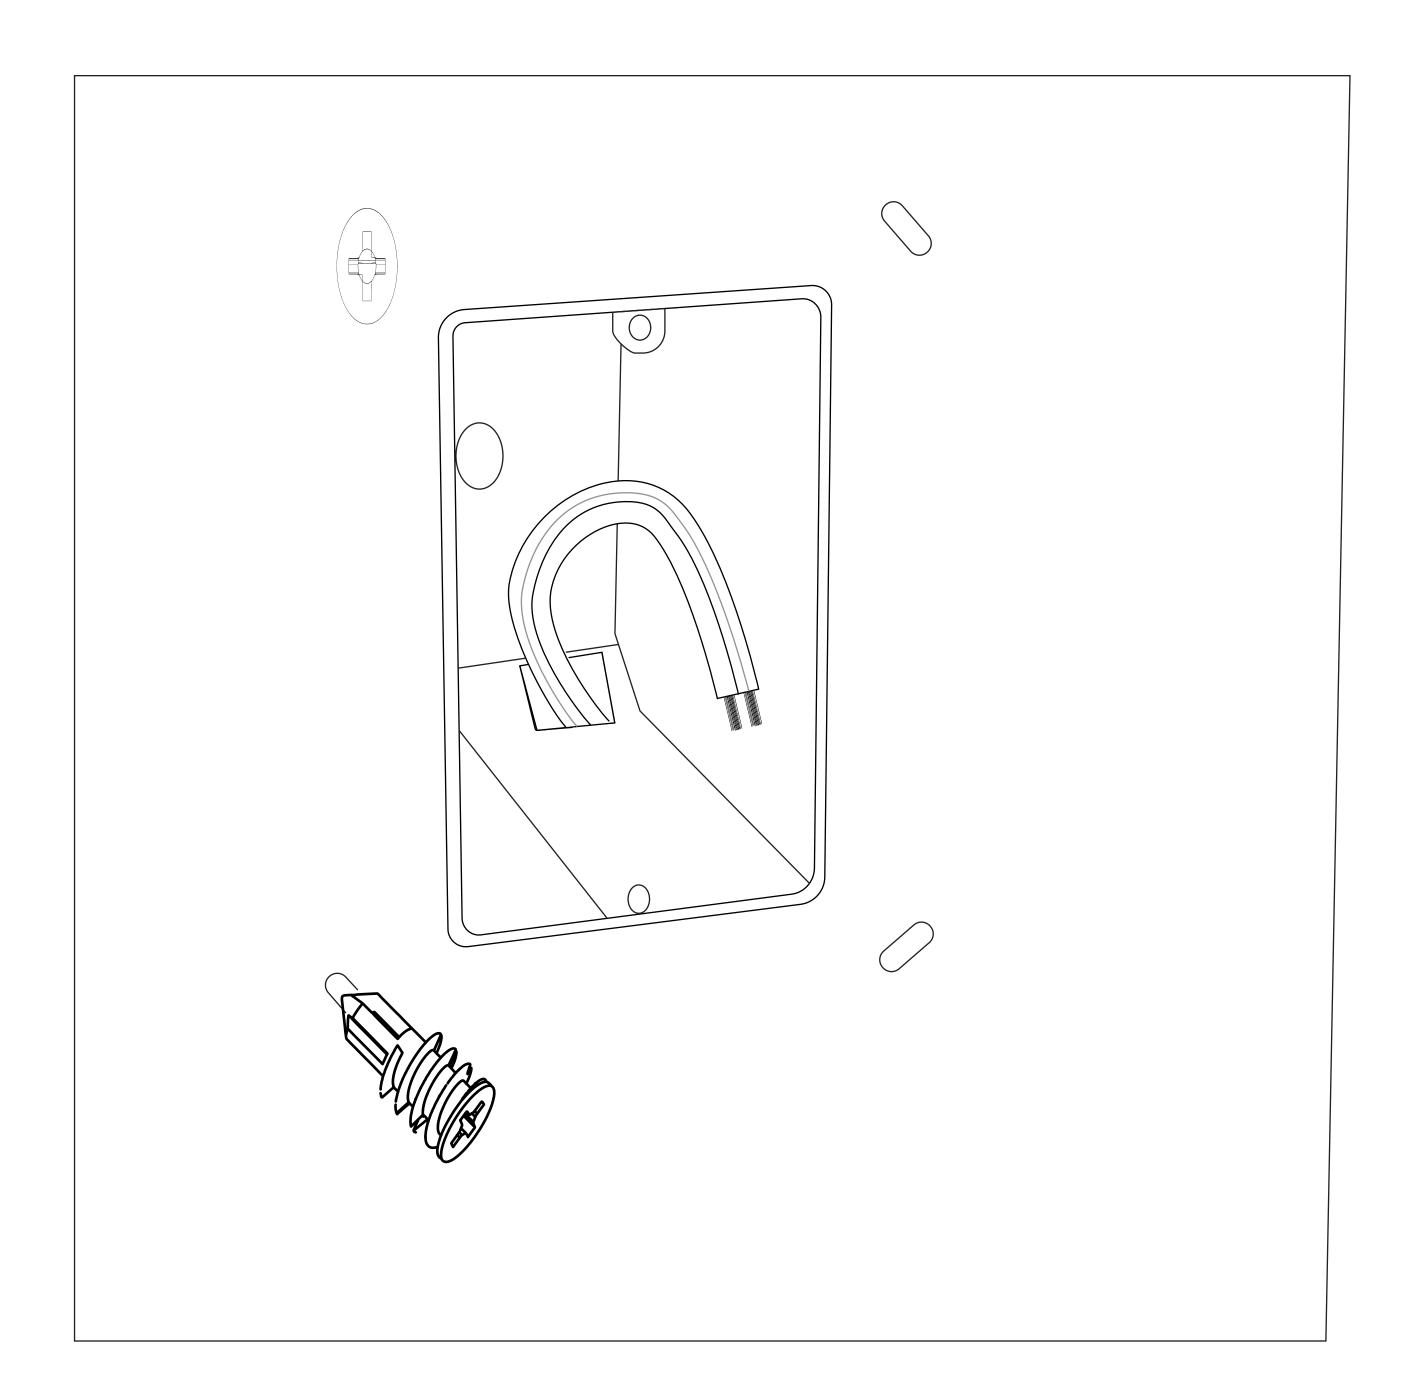

WALLSTATION New Construction - 2 Wire

7. Connect the Phoenix to TE cable provided to the 14-2 wire and onto the White TE Connector on the WallStation DC Adapter.

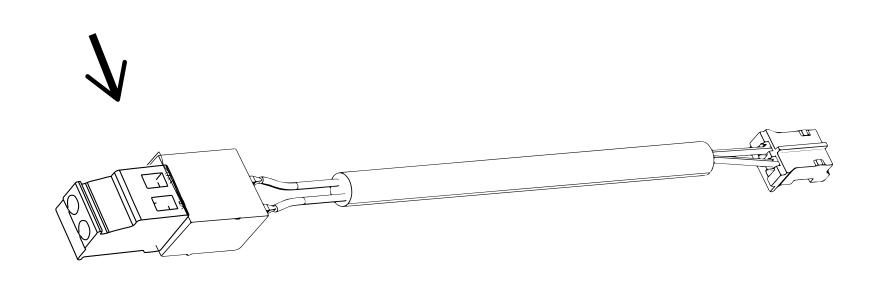

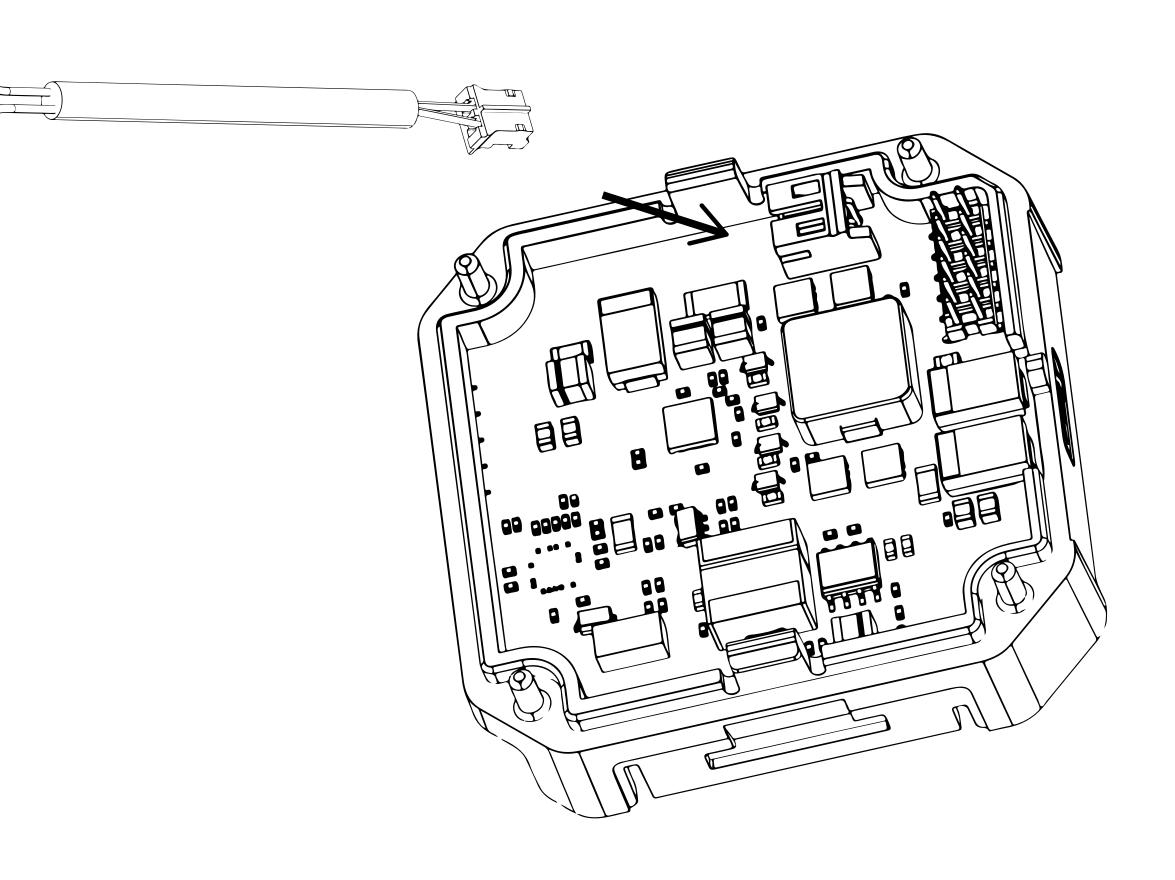


Zip tie the Connector to the DC board for added cable retnetion.

IPCRT CONNECT

WALLSTATION New Construction - 2 Wire


8. Insert the WallStation back into the 1G box and use the provided screws to attach the WallStation to the wall.


IMPORTANT: Make Sure to position the WallStation with the Up Arrow facing up. Use a leveling tool to level the WallStation and hand tighten the screws.

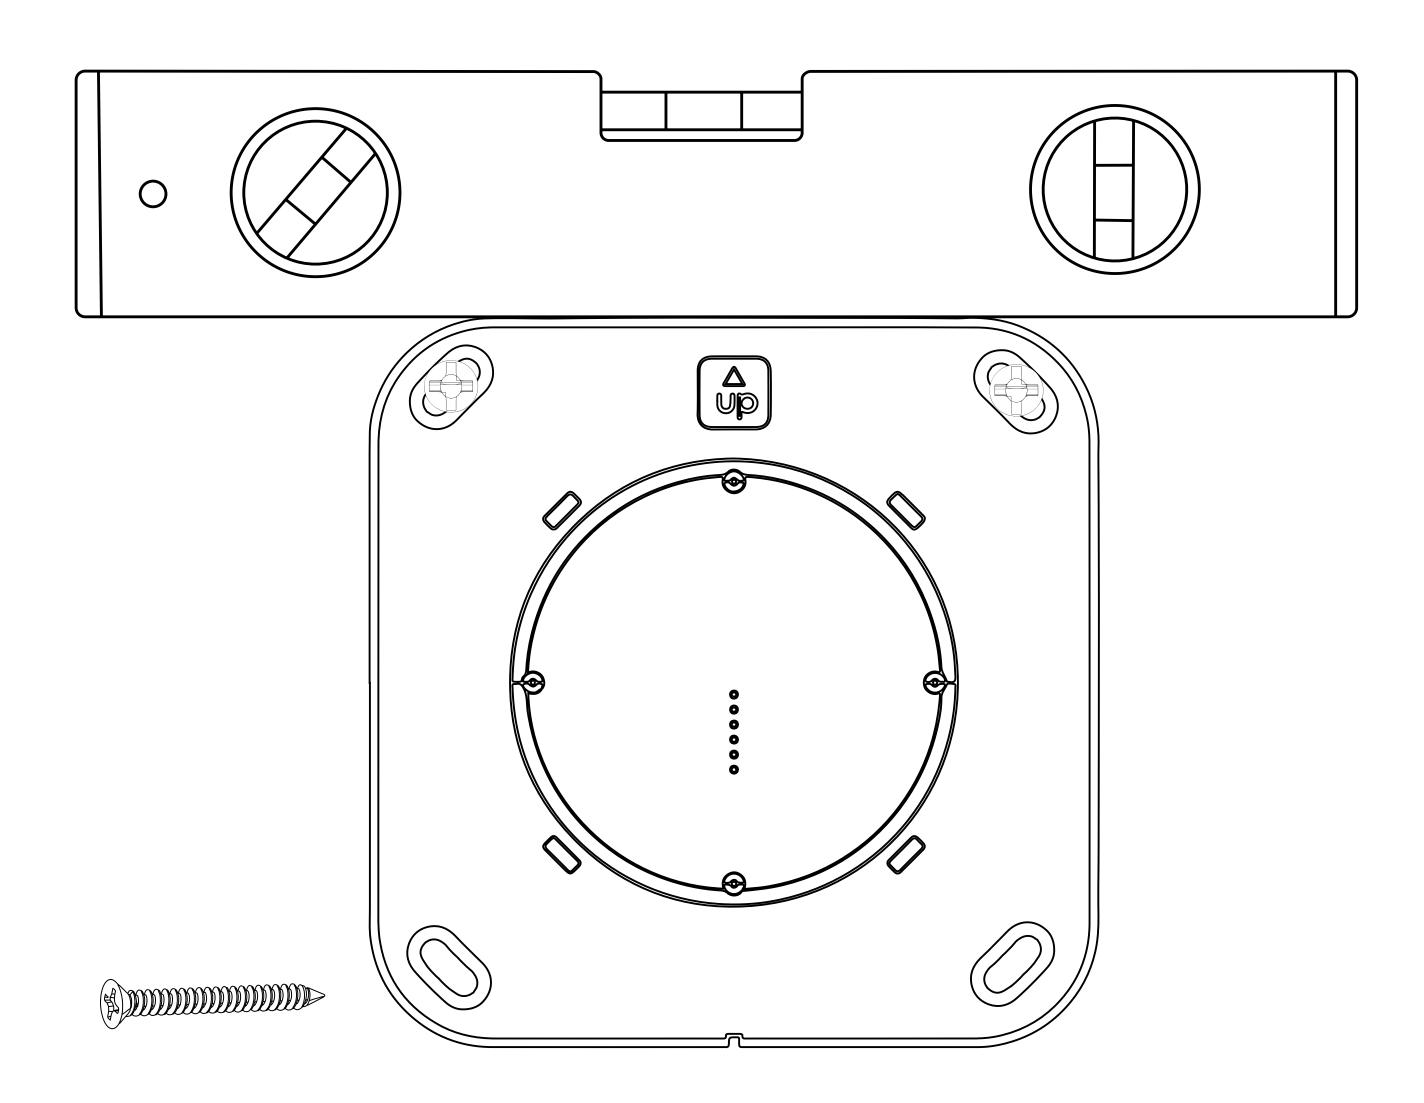

WALLSTATION New Construction - 2 Wire

8. Attach the WallStation Cover Plate over the WallStation making sure to alight the positioning notch with the tooth on the WallStation.

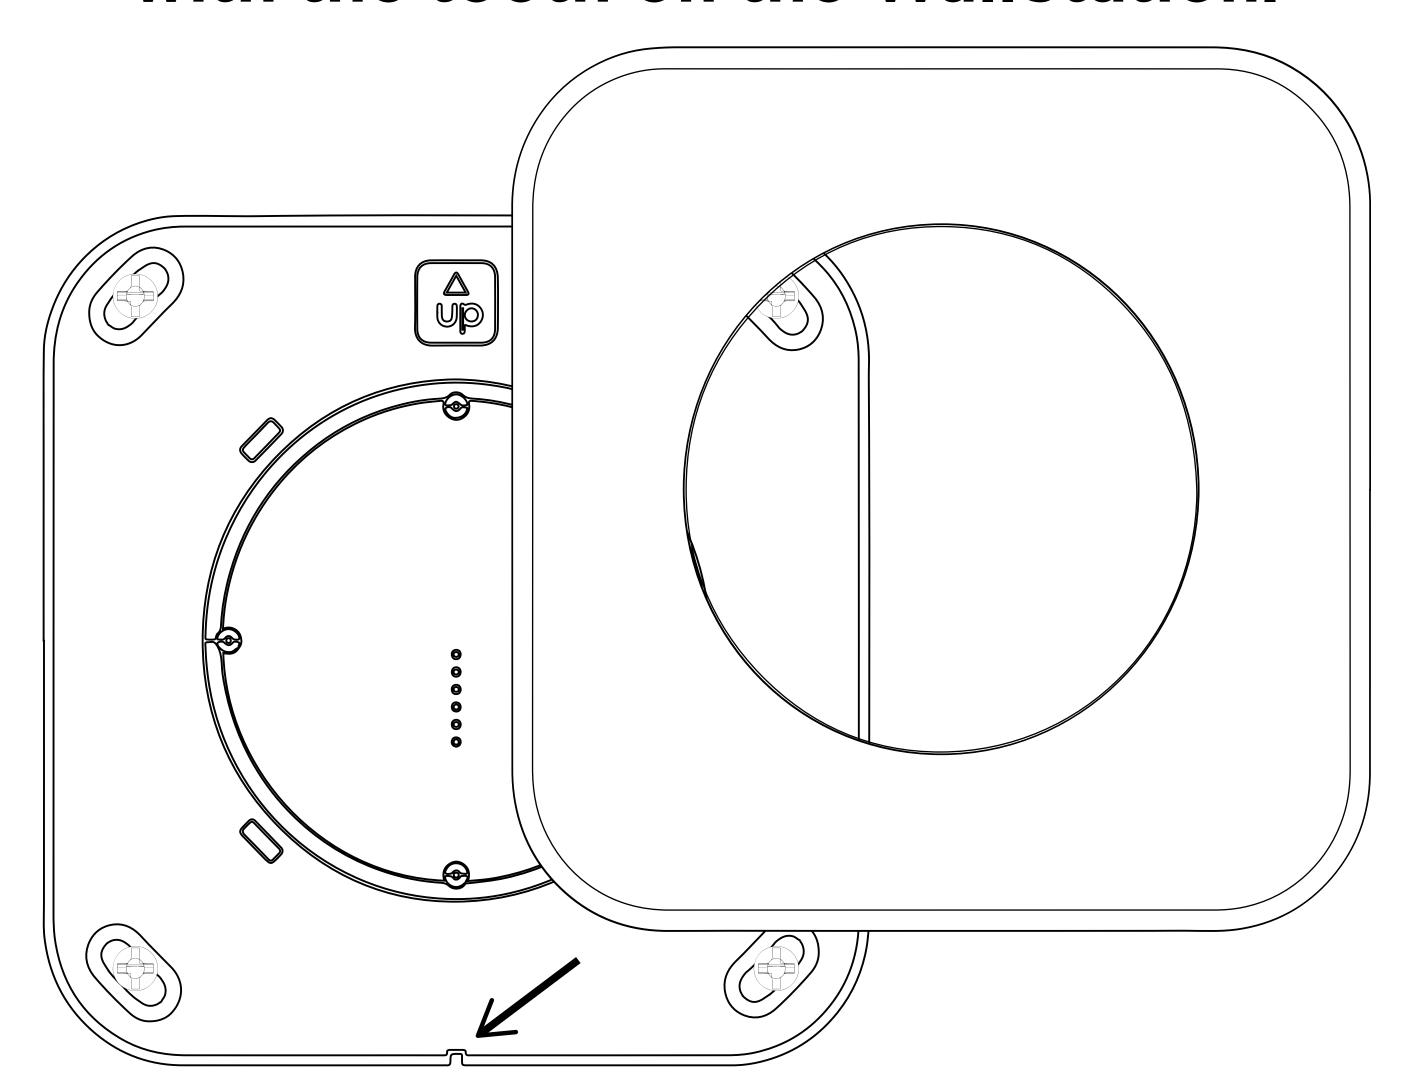


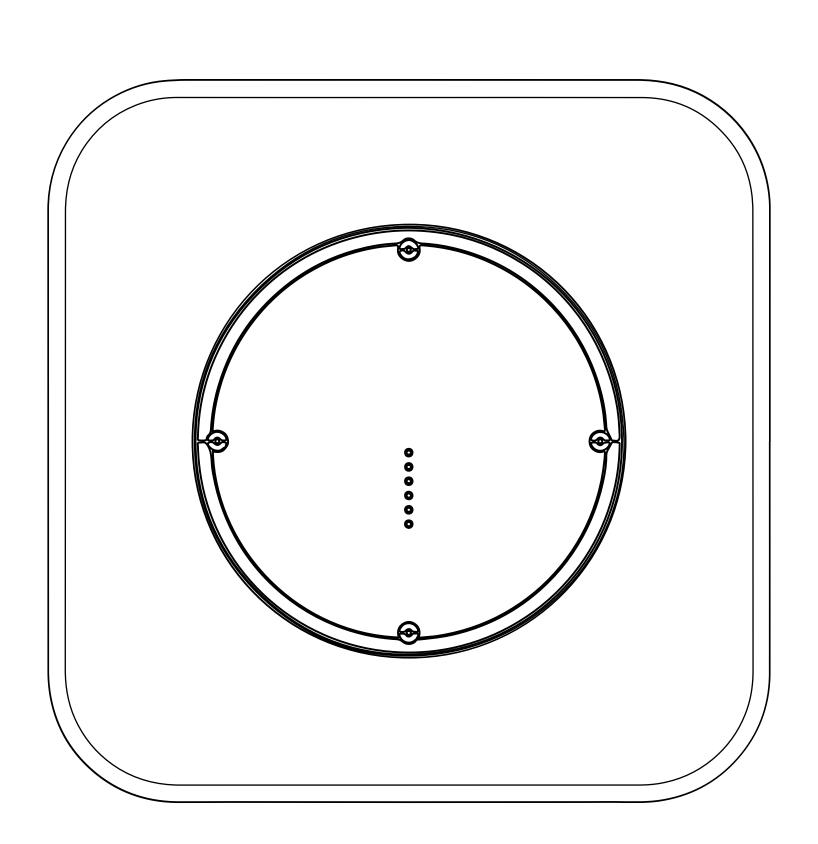


IPCRT CONNECT

WALLSTATION New Construction - 2 Wire

9. Connect the 2 wire to DC Connector at the other end of the 2 wire Cable.

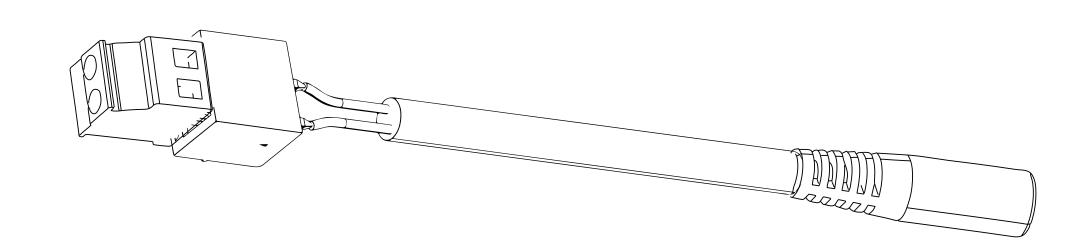


10. Connect the Provided DC Power Adapter into the wall and connect the barrel connector to the other end of the Phoenix adapter.

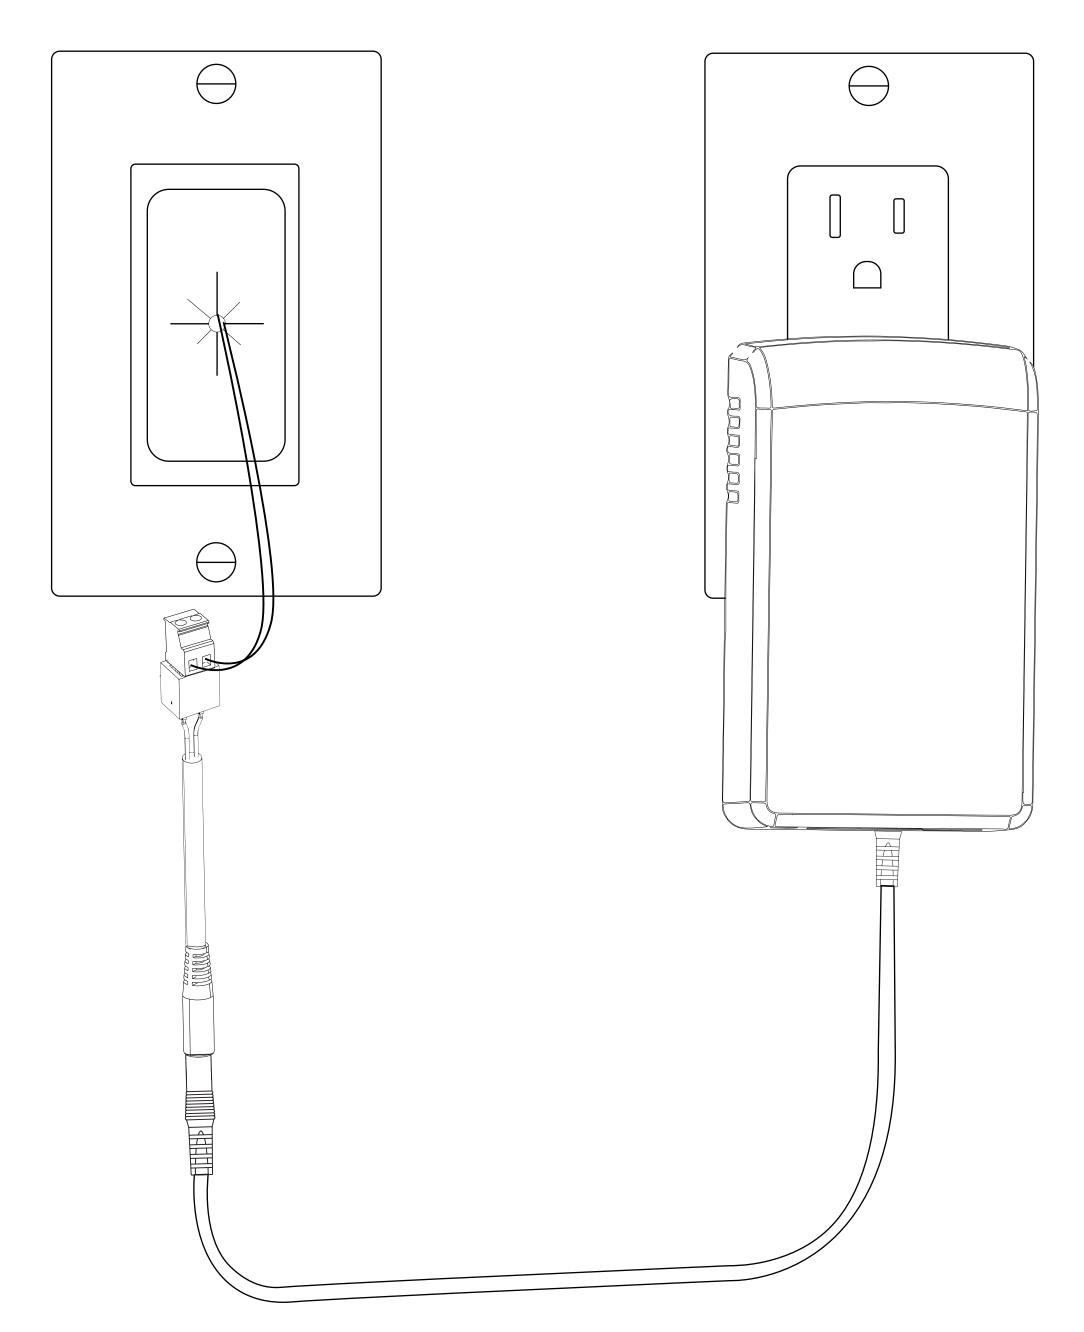

Grommit not included


WALLSTATION

For a clean finished look place the Connector and DC barrel plug back throug the grommit into the wall.

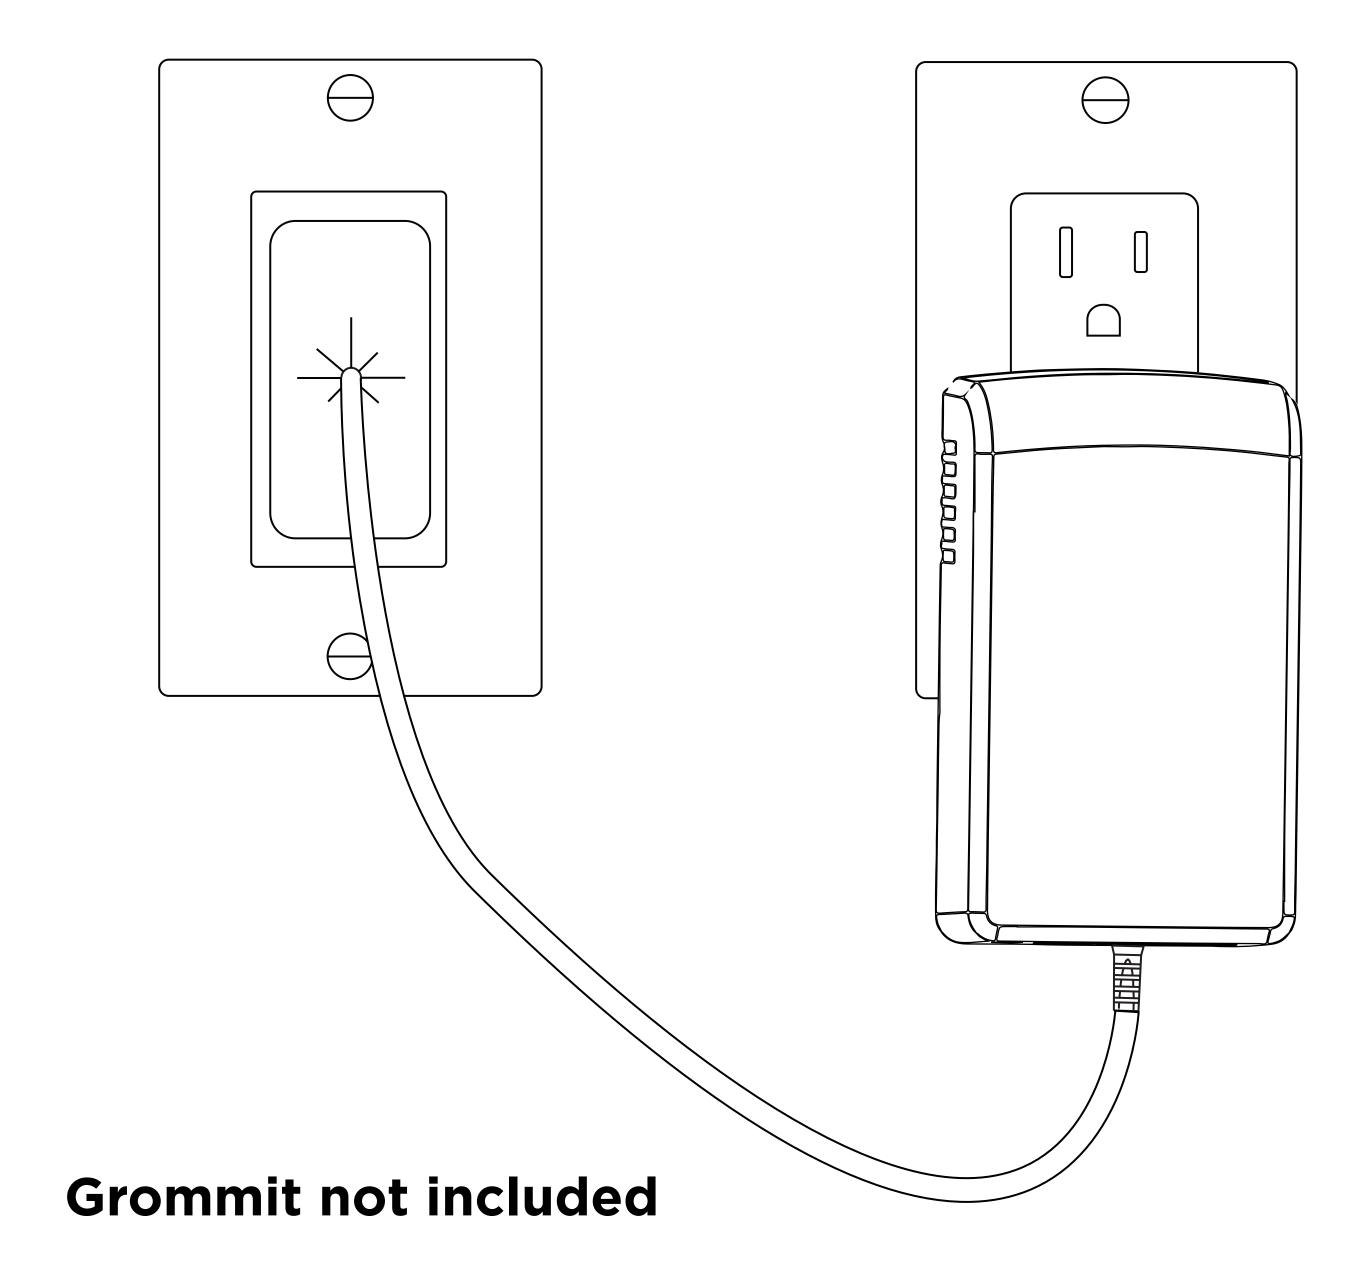

WALLSTATION New Construction - 2 Wire

Place a Case with an iPad installed onto the WallStation to determine power was installed properly and the iPad charges.

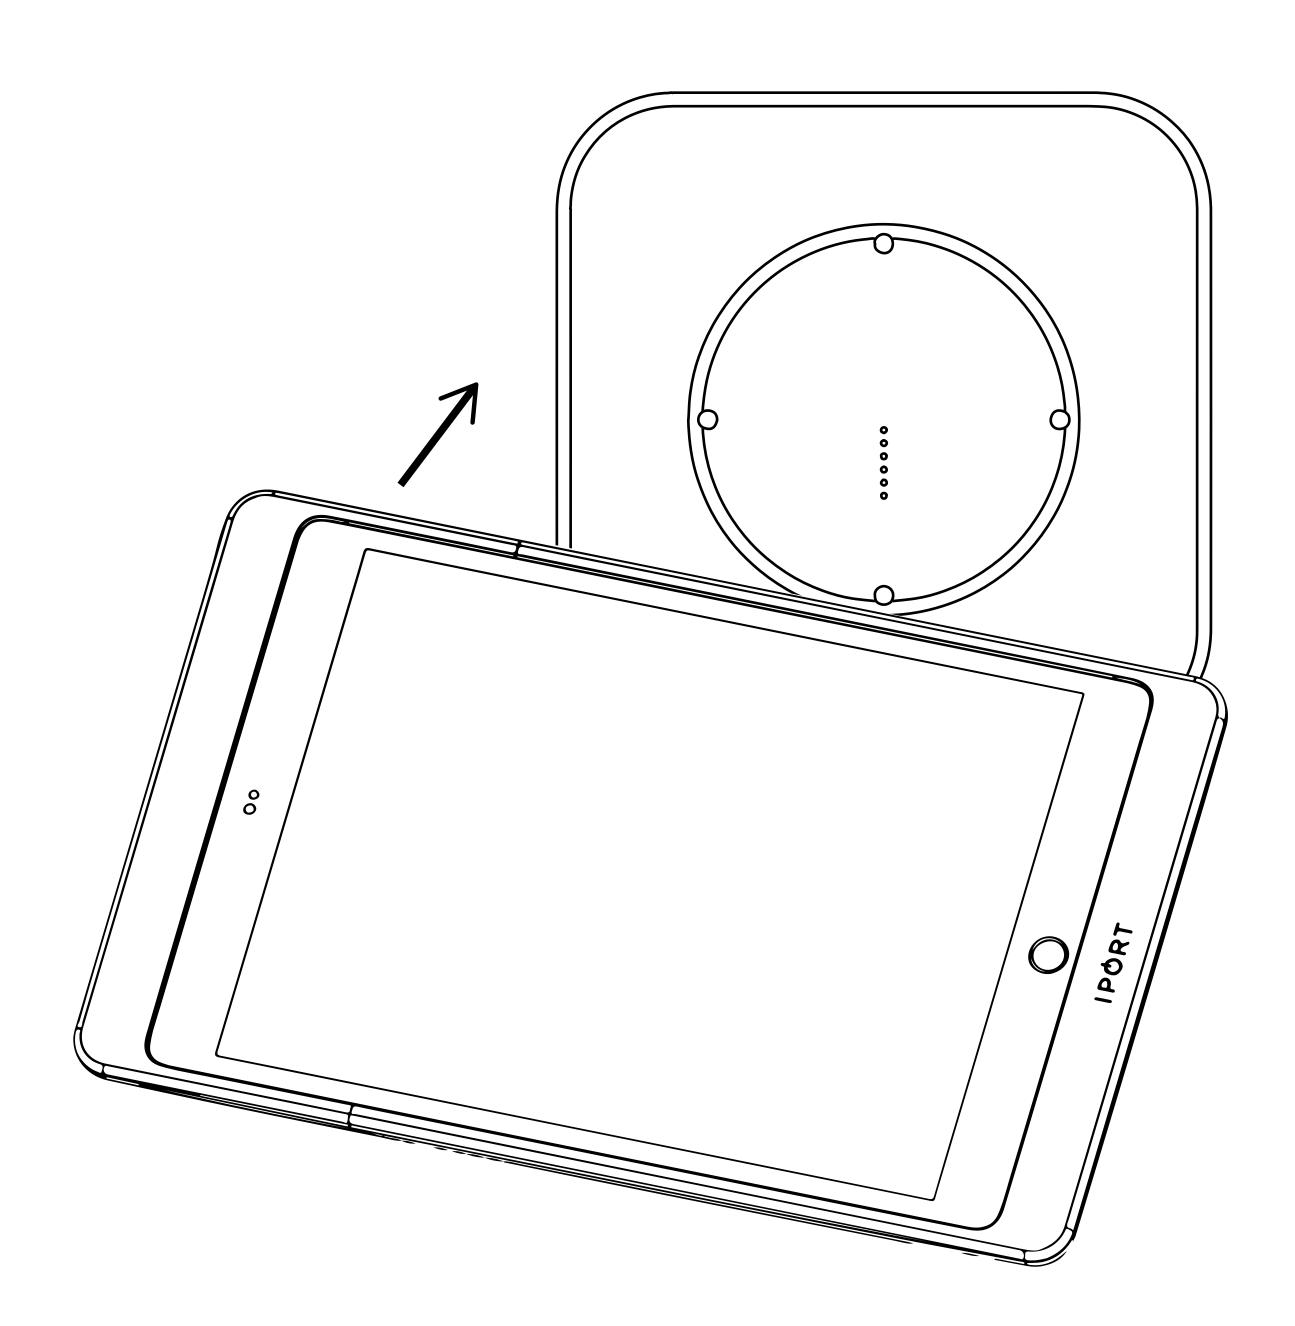

COMPLETE


WALLSTATION

WallStation Install Manual - Existing Construction - 2 Wire

Determine the desired location of the IPORT Connect Pro WallStation.




2. Use a 2-3/4" (70mm) hole saw to cut a hole in the desired location of the WallStation

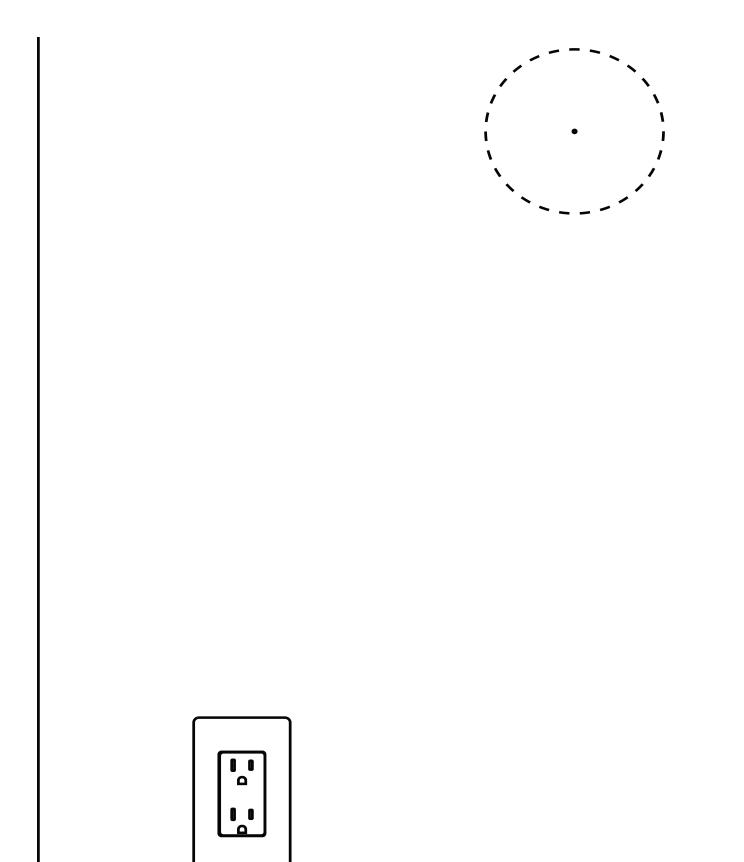


WALLSTATION Existing Construction - 2 Wire

3. Insert the WallStation into the 2 3/4 - inch hole and use a leveling tool to level the WallStation. Mark the 4 locations for the provided Anchors.

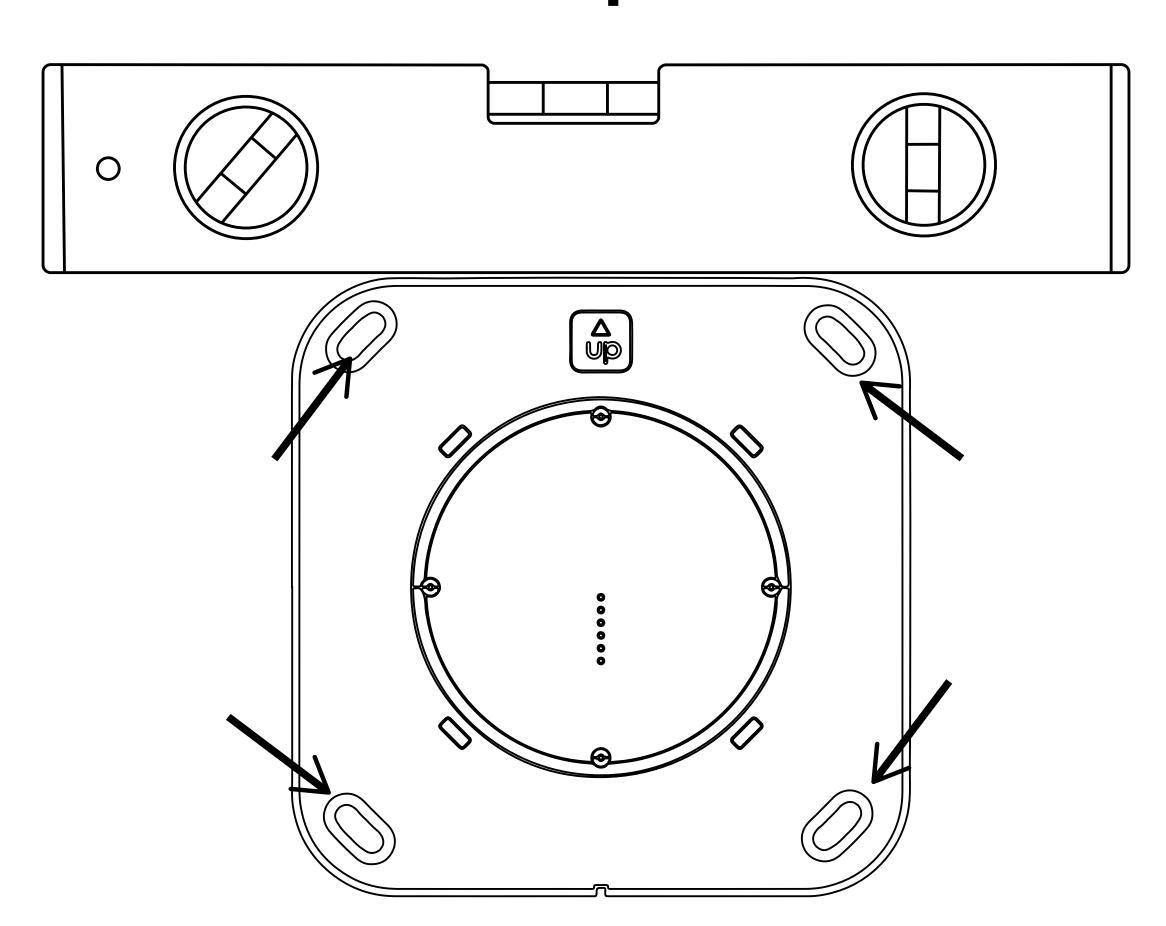


4. Remove the WallStation form the wall once you have marked the 4 anchor locations.

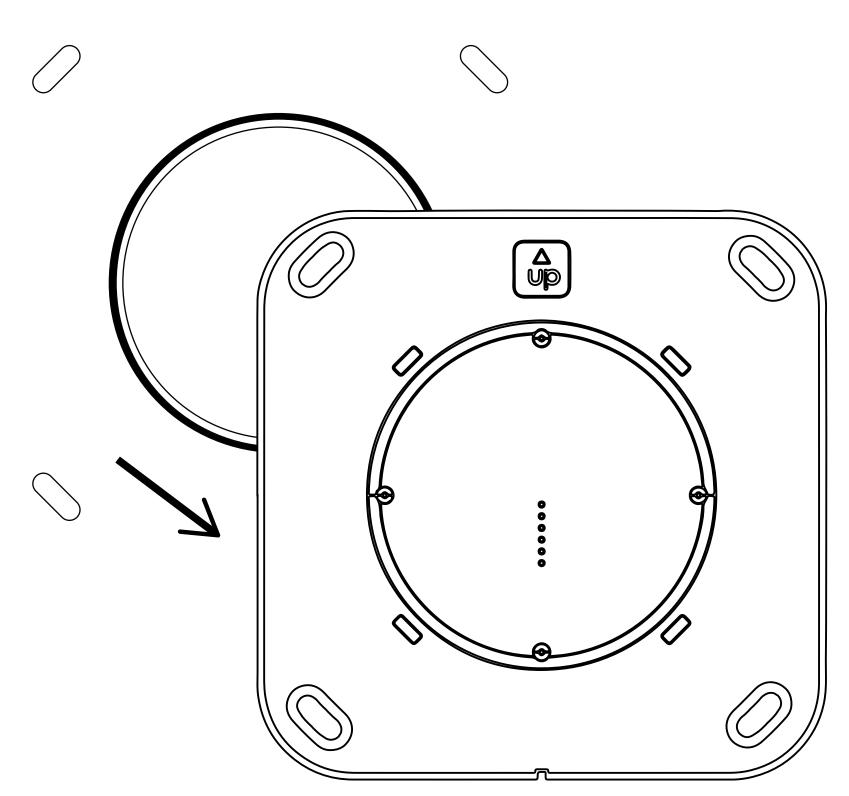


WALLSTATION Existing Construction - 2 Wire


5. Screw the provided anchors into the wall where marked.

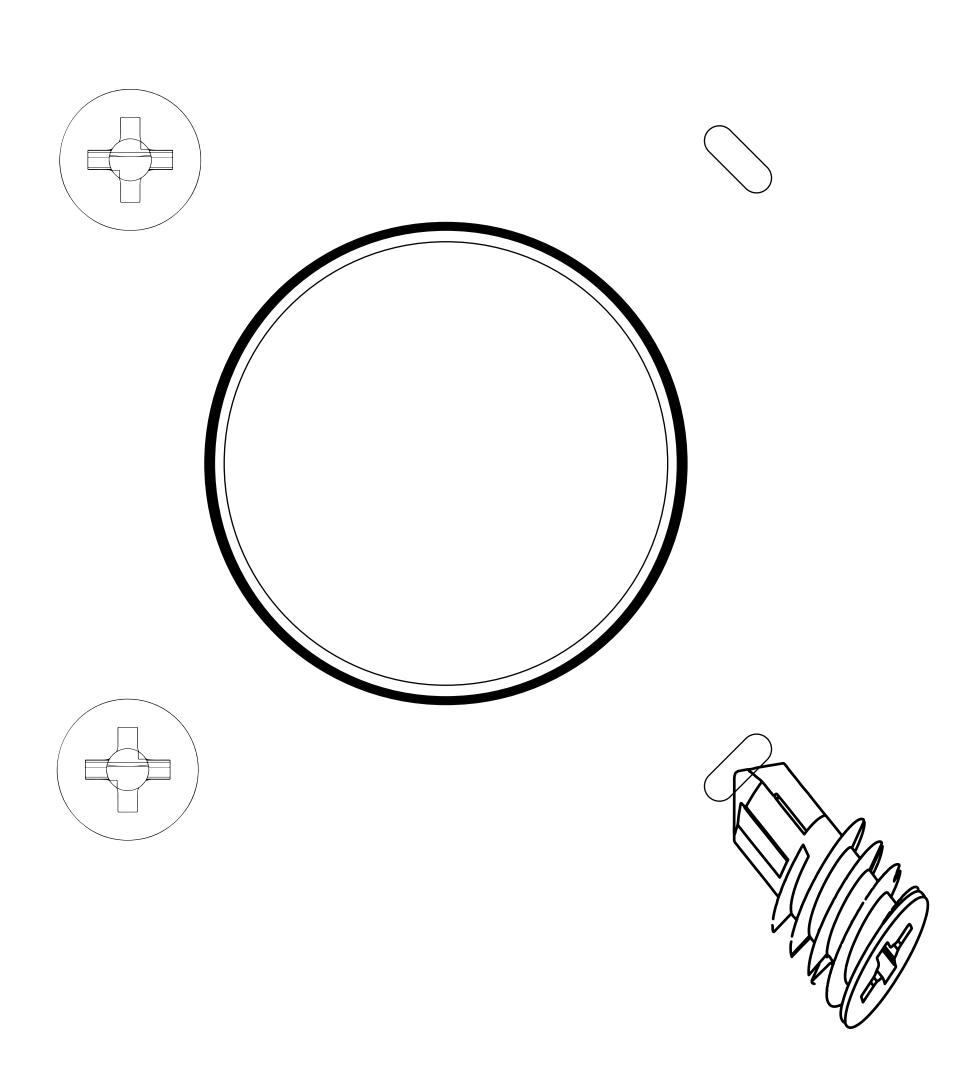


WALLSTATION Existing Construction - 2 Wire

6. Use the 2 3/4 - inch hole to fish a 14/2 cable to a nearby AC outlet, closet or network rack.

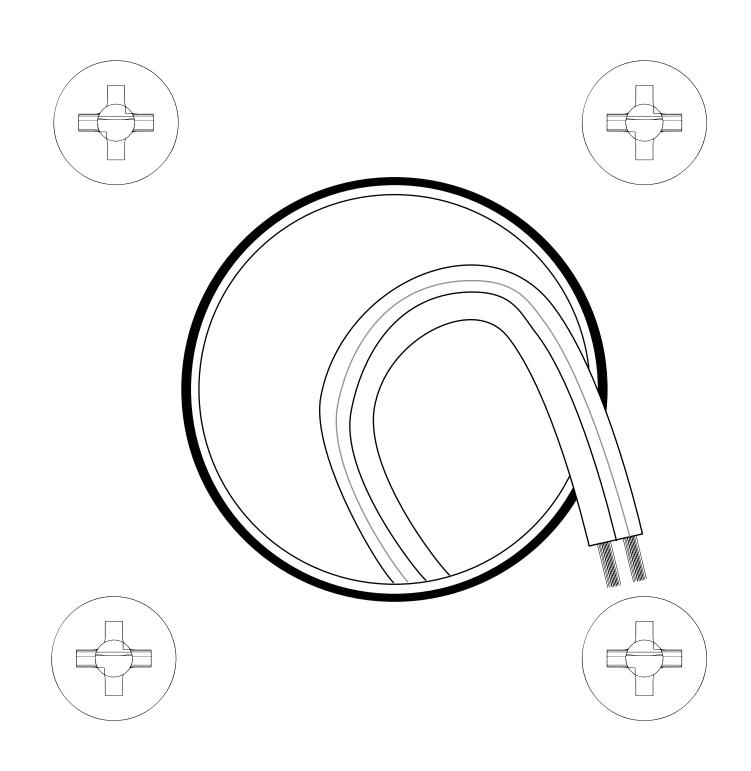


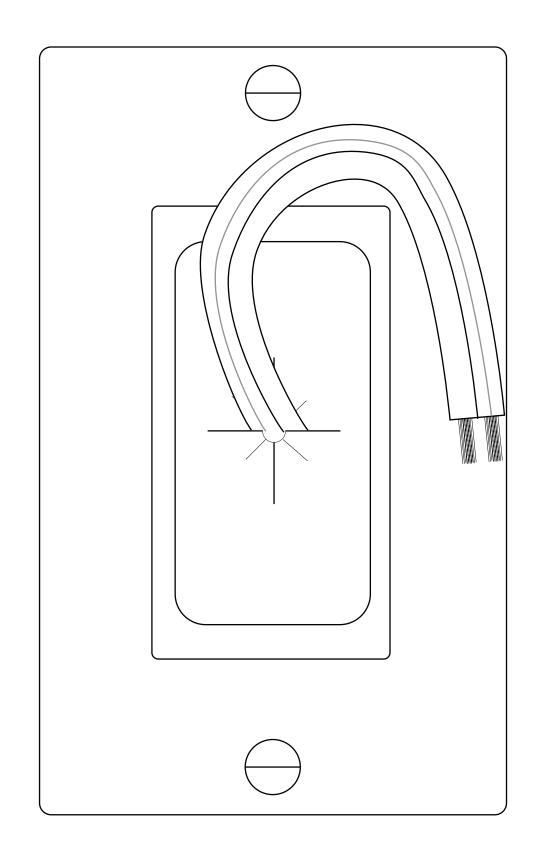


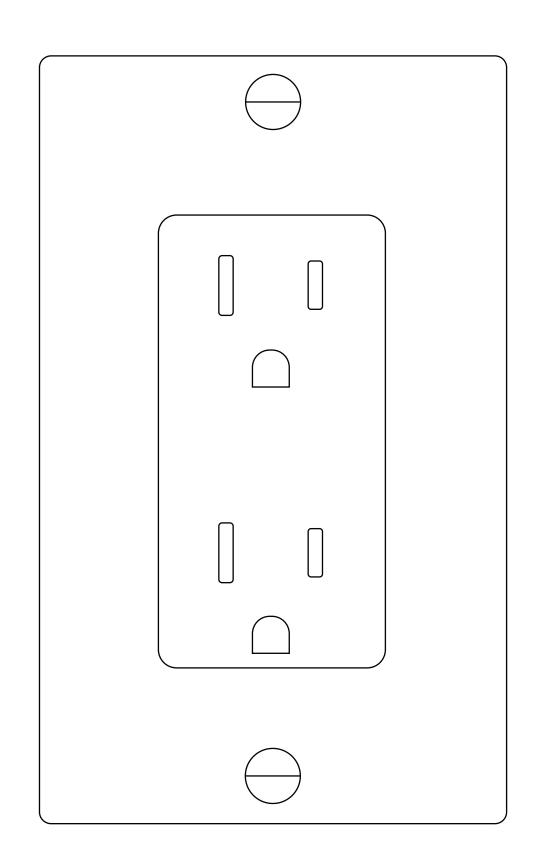

WALLSTATION Existing Construction - 2 Wire

7. Connect the Phoenix to TE cable provided to the 14-2 wire and onto the White TE Connector on the WallStation DC Adapter.

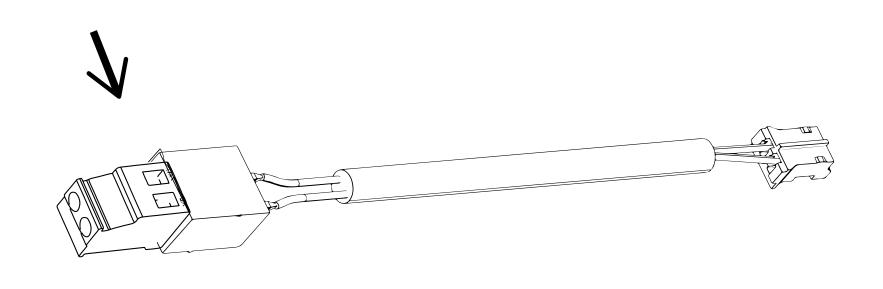

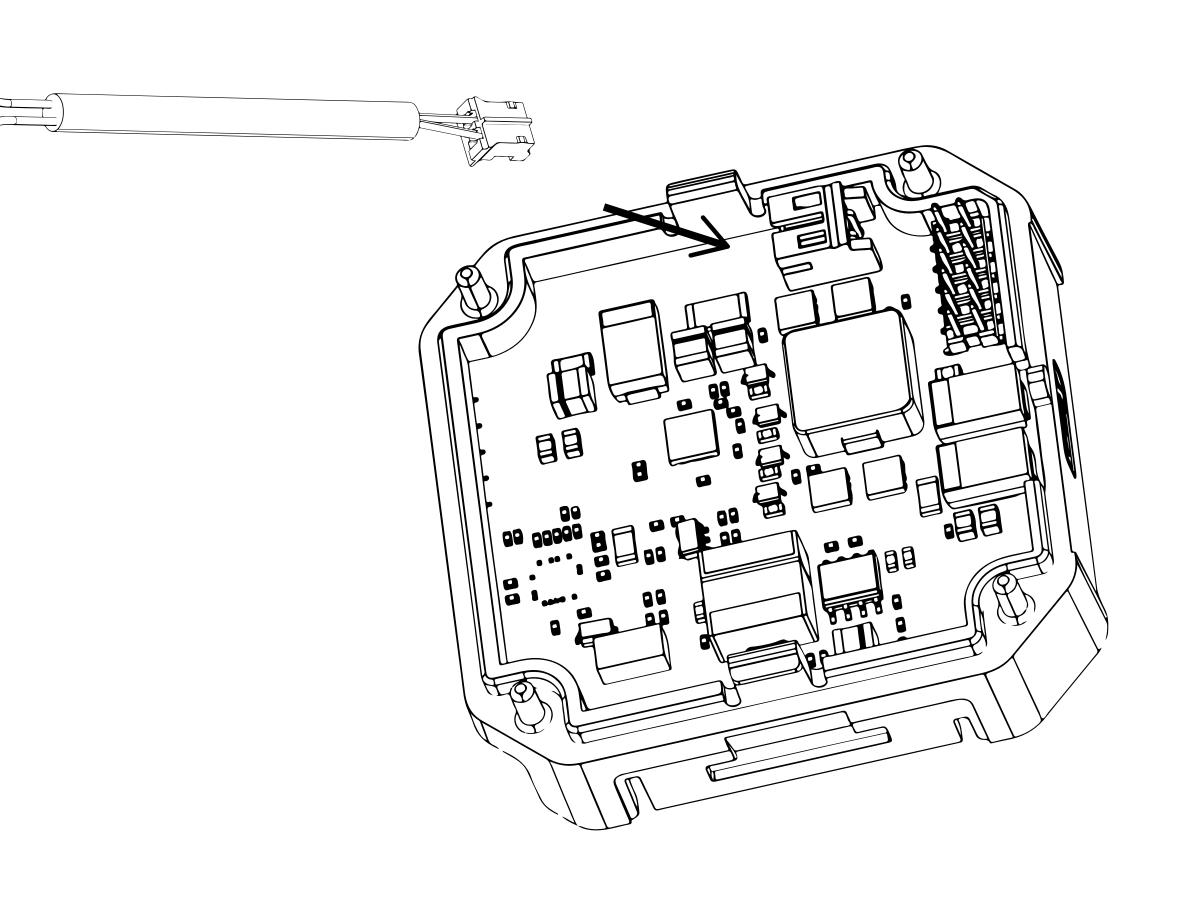


Zip tie the Connector to the DC board for added cable retnetion.

WALLSTATION Existing Construction - 2 Wire


8. Insert the WallStation back into the wall and use the provided screws to attach the WallStation to the wall anchores.


IMPORTANT: Make Sure to position the WallStation with the Up Arrow facing up. Use a leveling tool to level the WallStation and hand tighten the screws.

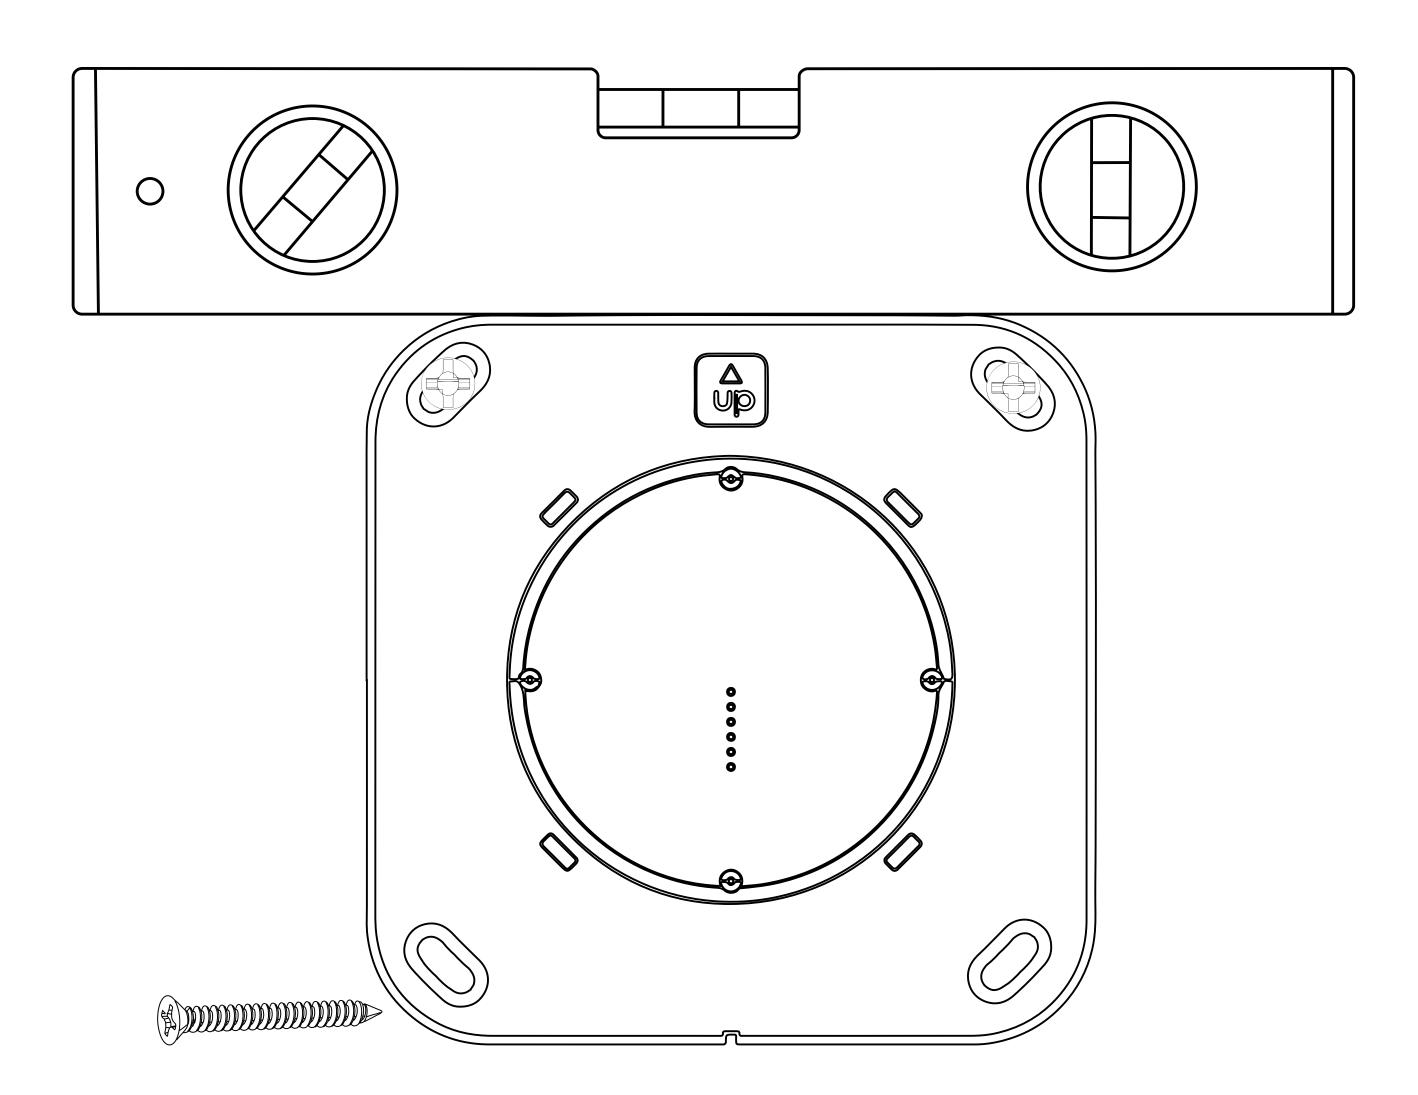

WALLSTATION Existing Construction - 2 Wire

9. Attach the WallStation Cover Plate over the WallStation making sure to alight the positioning notch with the tooth on the WallStation.

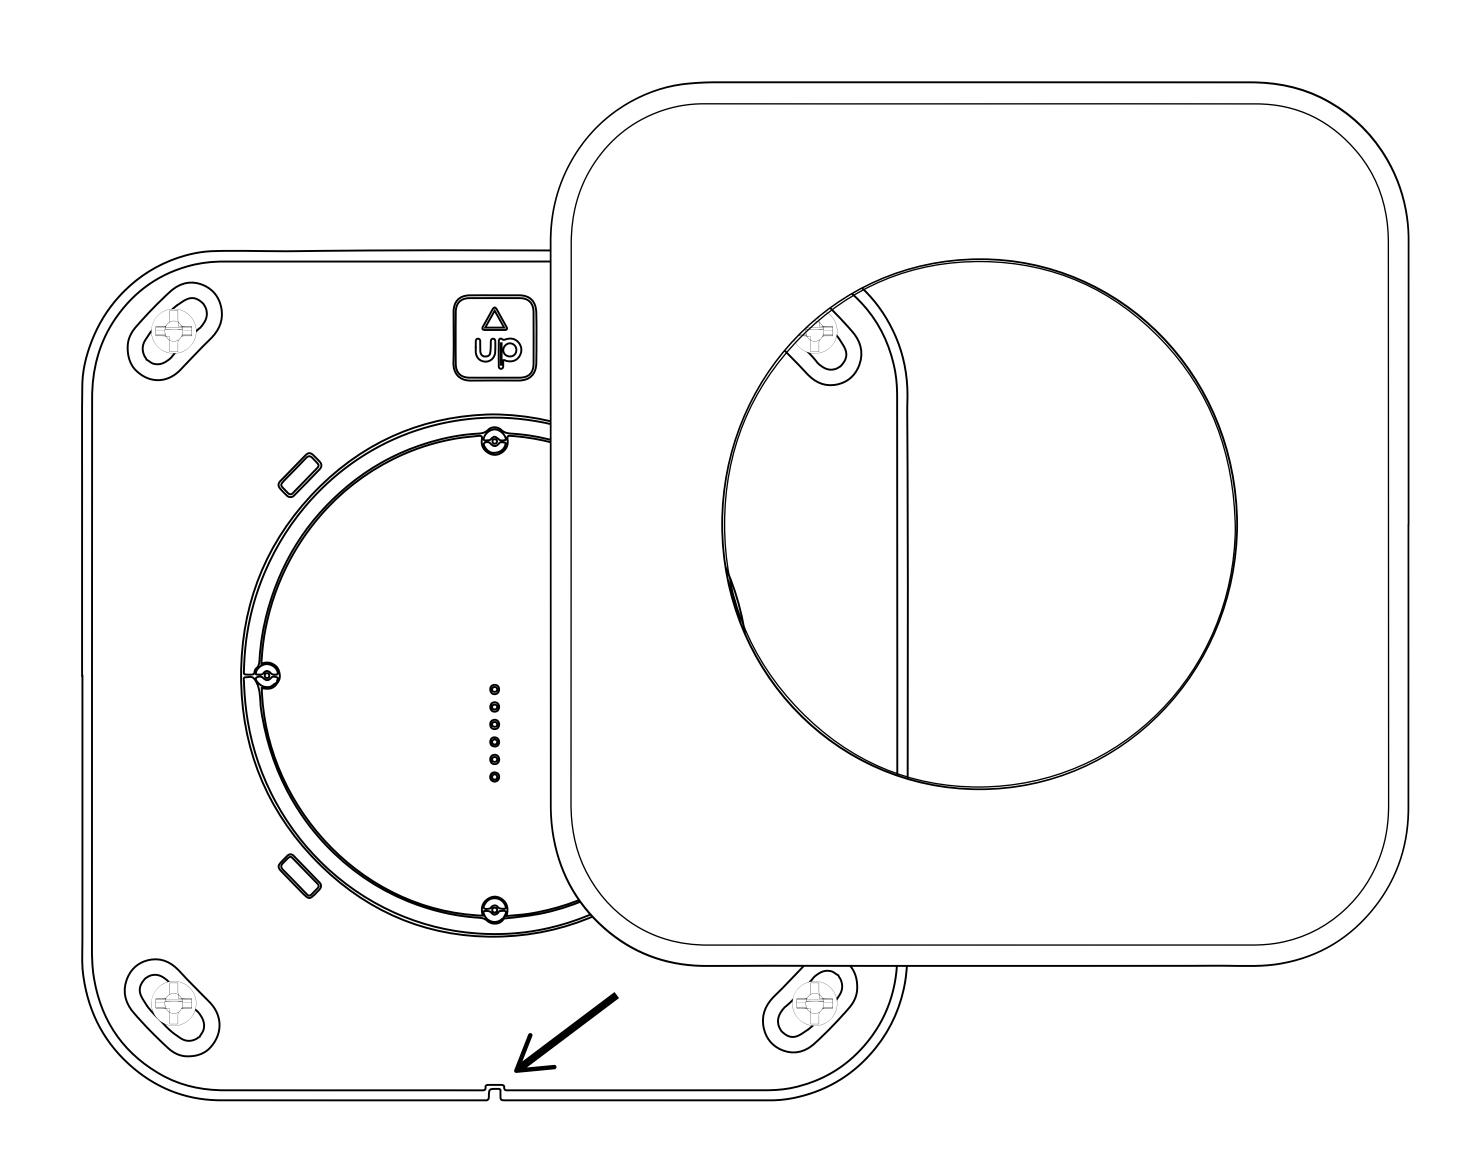


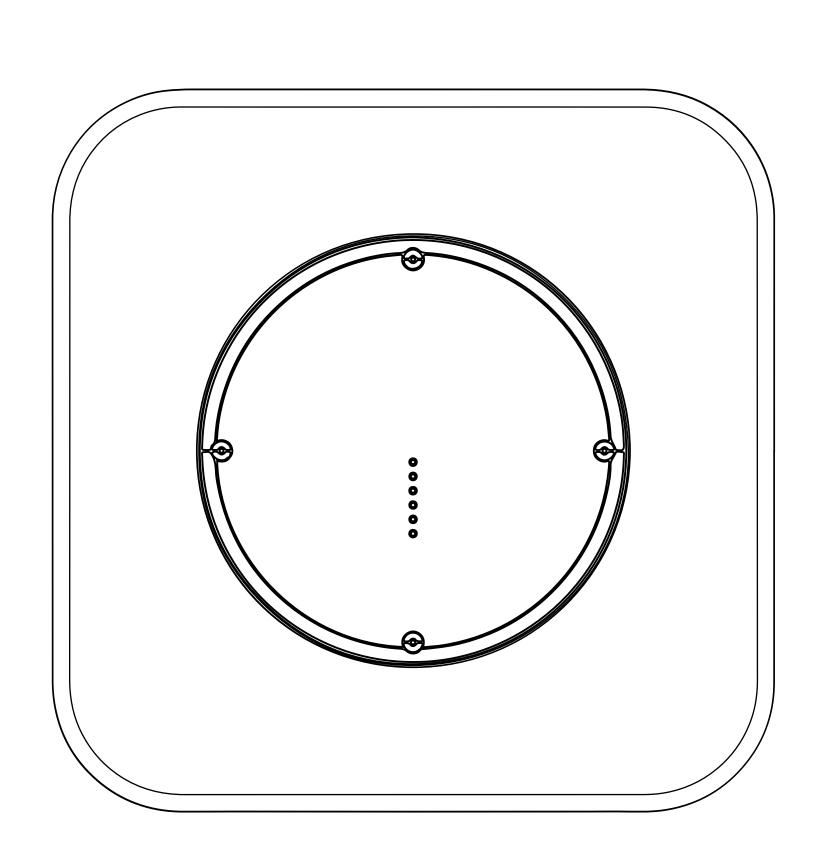


IPORT CONNECT

WALLSTATION Existing Construction - 2 Wire

10. Connect the 2 wire to DC Connector at the other end of the 2 wire Cable.

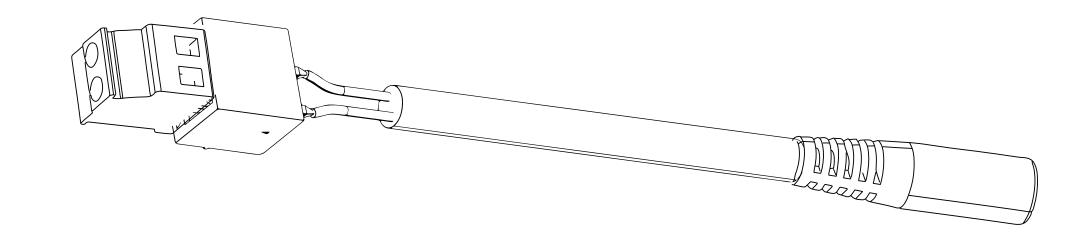


11. Connect the Provided DC Power Adapter into the wall and connect the barrel connector to the other end of the Phoenix adapter.

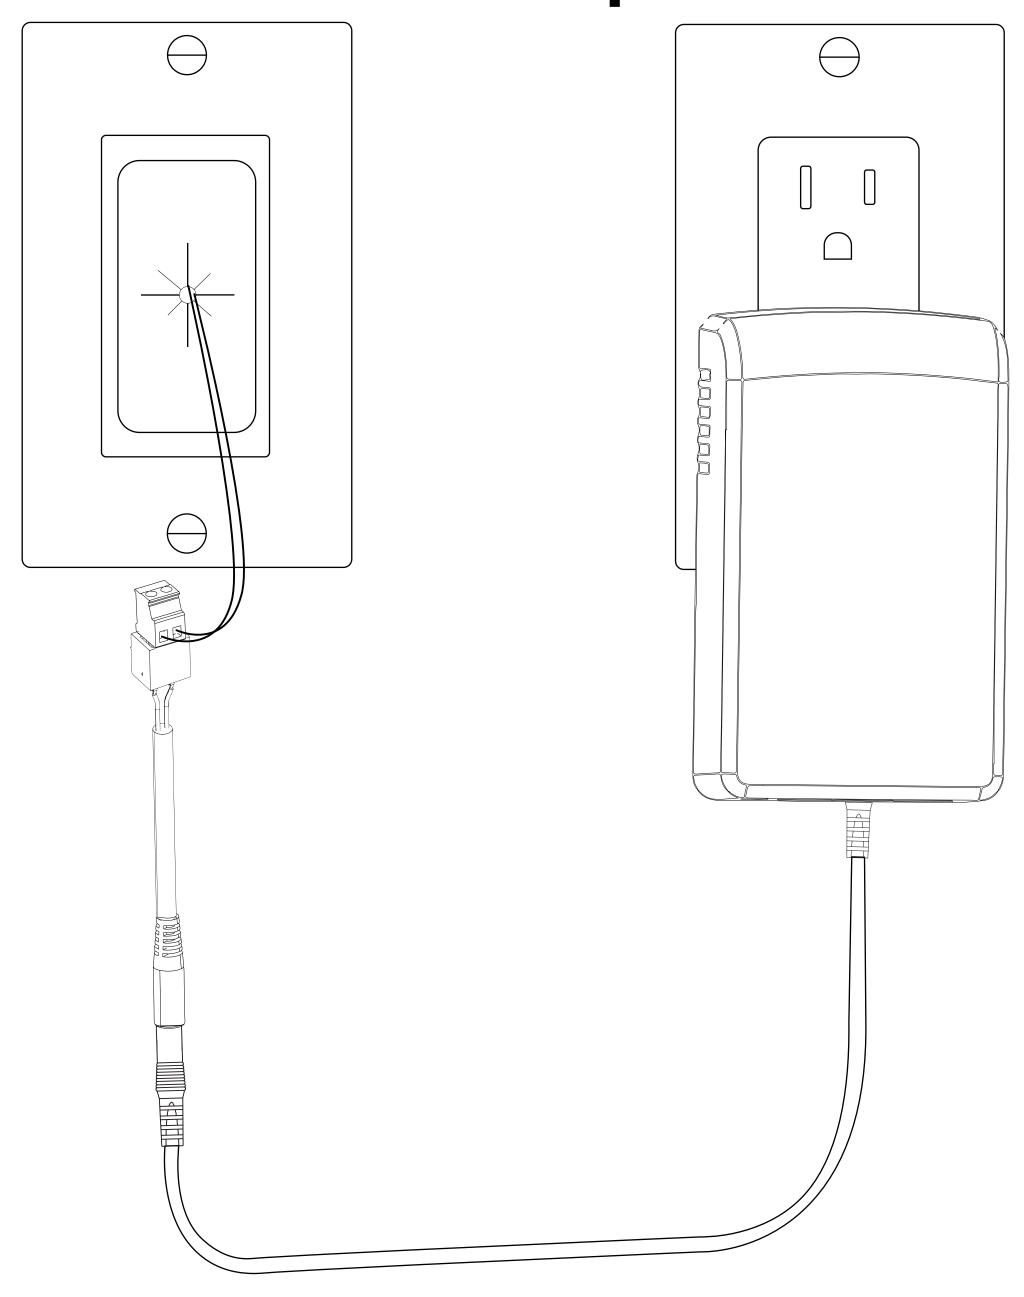

Grommit not included


WALLSTATION

For a clean finished look place the Connector and DC barrel plug back throug the grommit into the wall.

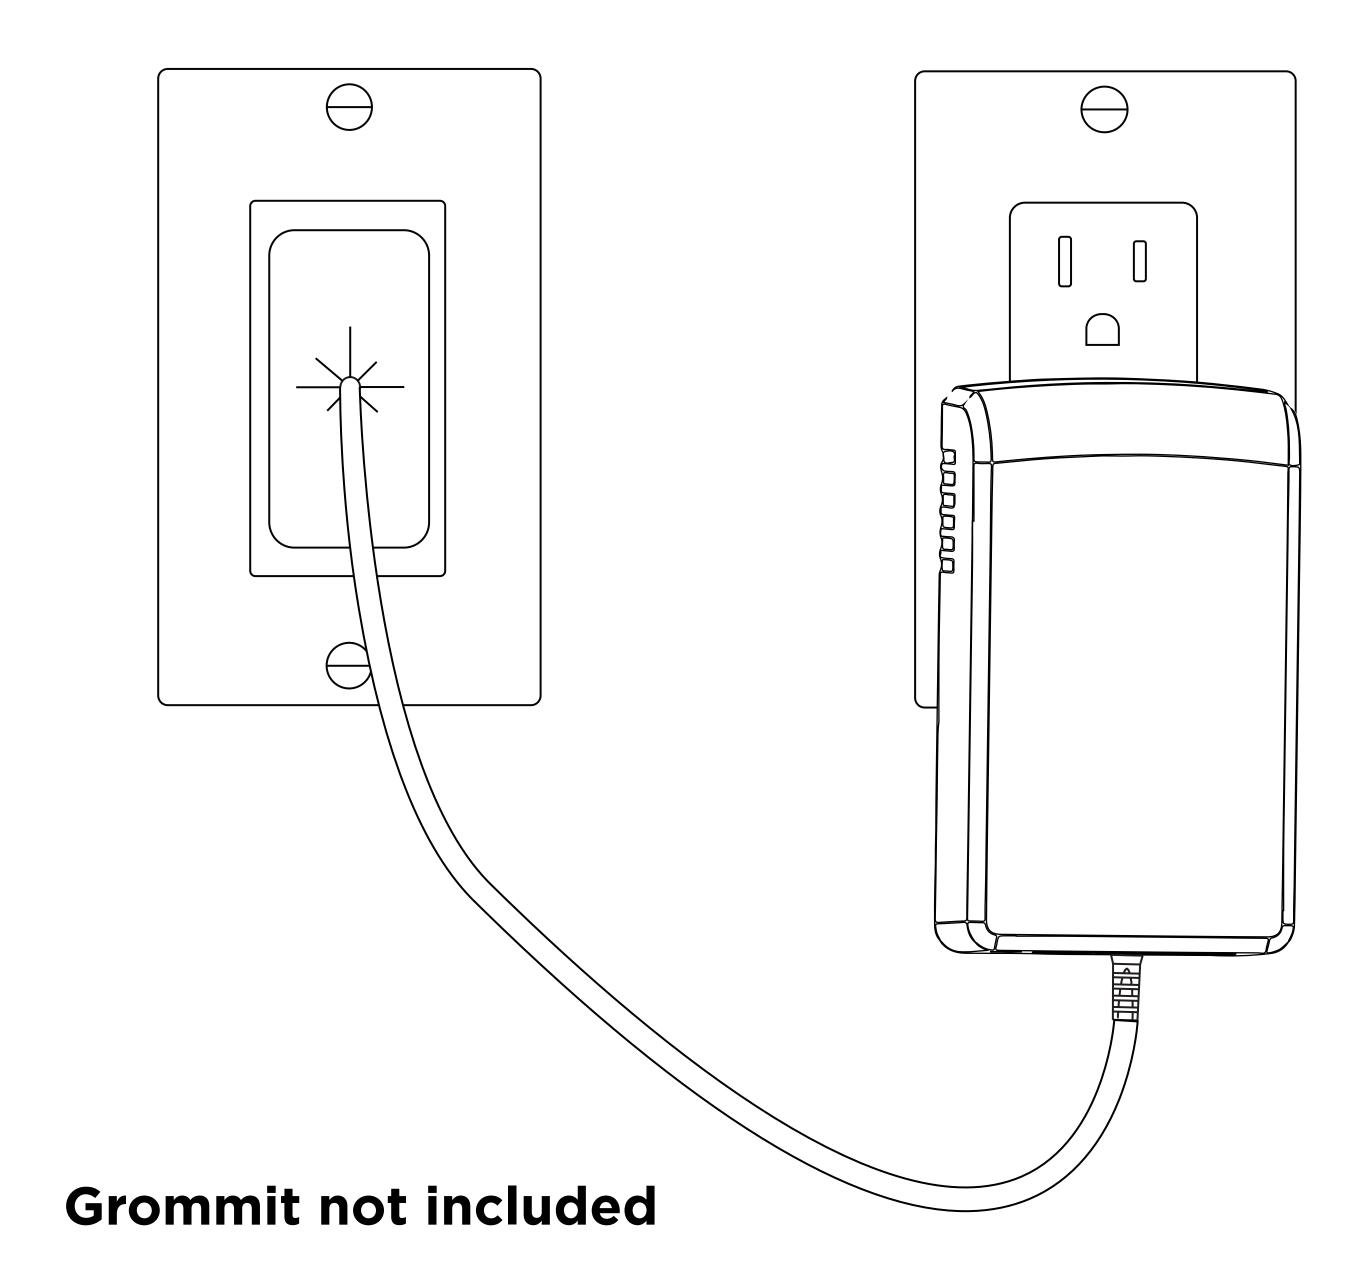

WALLSTATION Existing Construction - 2 Wire

12. Place a Case with an iPad installed onto the WallStation to determine power was installed properly and the iPad charges.

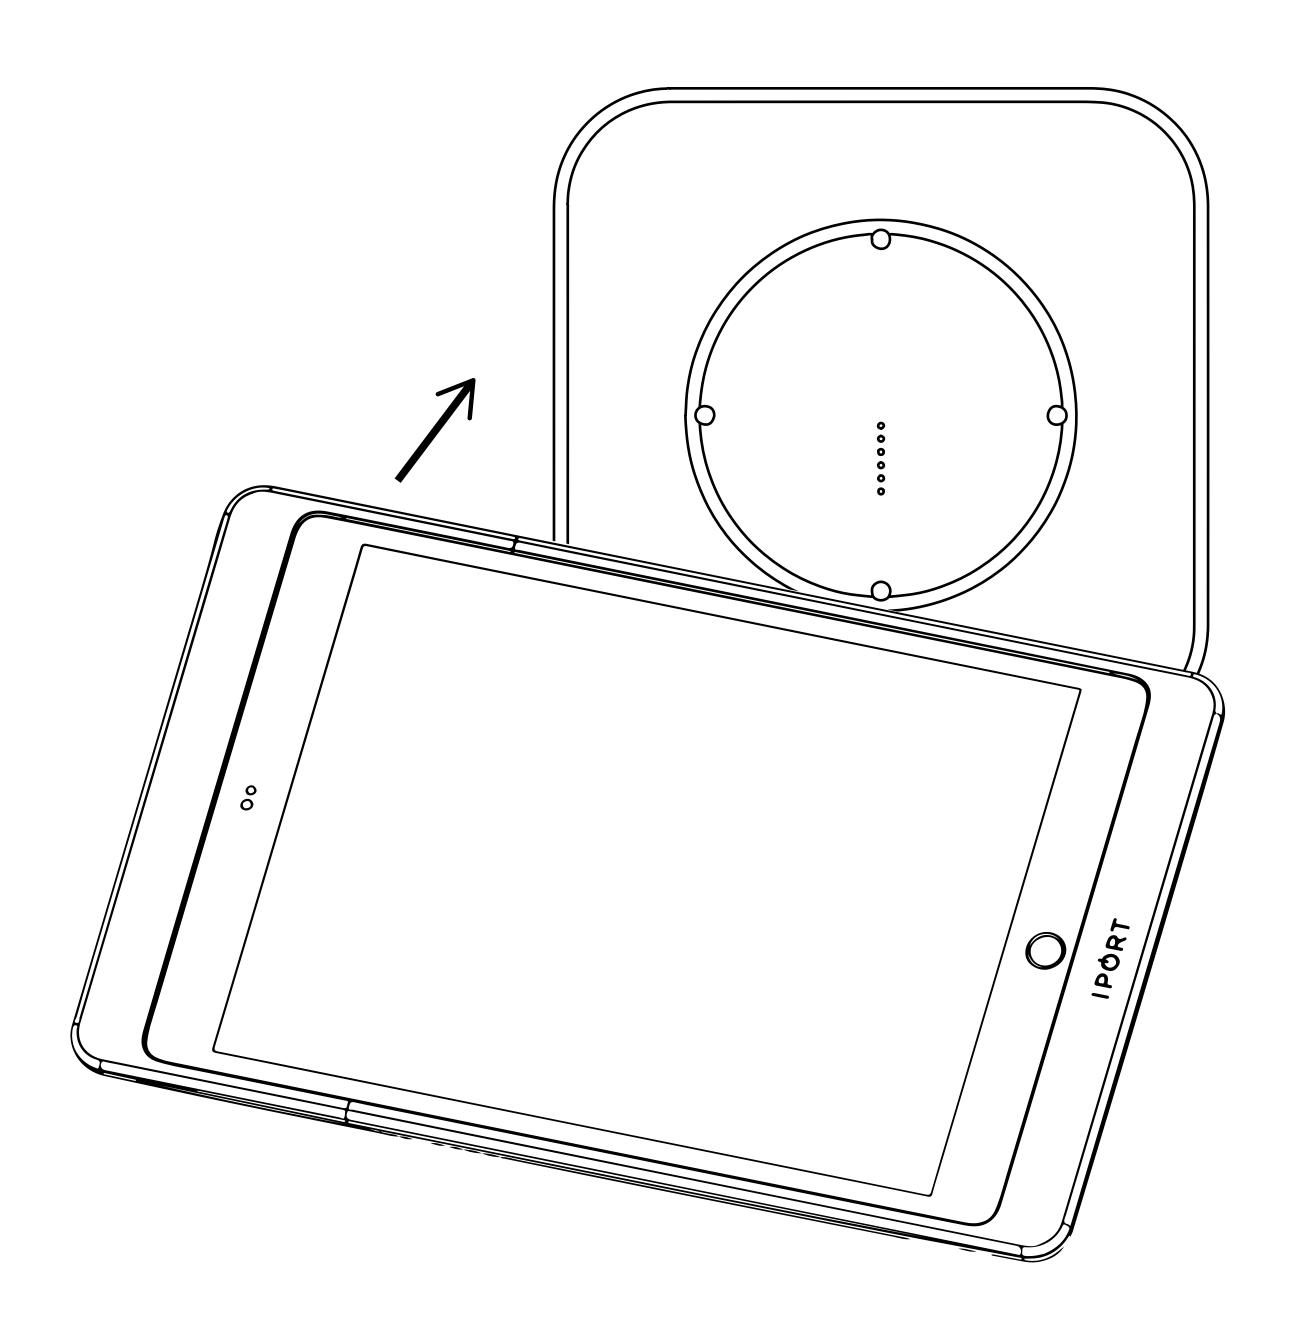

COMPLETE