Wall Installation

xPRESS
Audio Keypad
Quickstart Guide
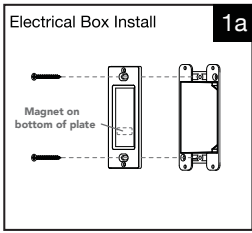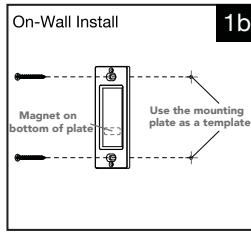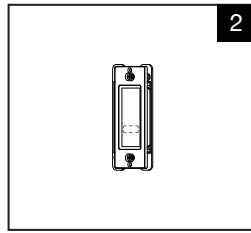
Electrical Box Install	**1a**

Magnet on bottom of plate

Screw the wall plate adapter to the wallbox with the provided screws. Be sure the magnet is on the bottom.

On-Wall Install	**1b**

Magnet on bottom of plate

Use the mounting plate as a template

Mark the holes using the wall plate adapter and use the screws provided to screw the wall plate adapter to the wall. No other anchors are required.
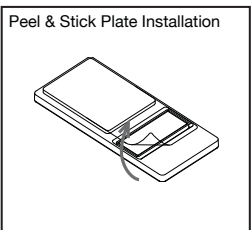
2

Be sure the wall plate adapter is level and tightened.

Download the **iPort Connect** iOS App to set up your Audio Keypad.

Available on the App Store

3

(Wall box optional)

Use any Decora compatable wall plate (sold separately). Screw the wall plate base on with the trim screws provided with the wall plate.

4

Snap the wall plate cover on and attach the xPRESS Audio Keypad. The keypad magnetically attaches to the wall plate adapter and can be removed at any time.
NOTE: If keypad does not magnetically attract, check the orientation of the wall plate adapter.

Peel & Stick Plate Installation

Peel plastic to reveal the adhesive strip. Stick onto a wall or furniture. The keypad magnetically attaches to the wall plate adapter and can be removed at any time.

Peel & Stick Plate Removal

Pull strip down behind plate

Pull plate

To remove the peel and stick plate, pry up the bottom and pull/stretch the adhesive strip downward.

NOTE: The plate is designed to bend and break when removing from the wall.
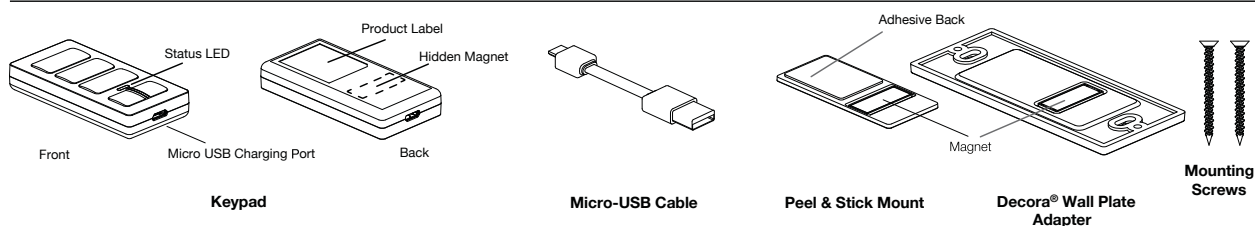
CAUTION: Only use this product as directed. Do not dismantle product. Unspecified use could result in injury.

CAUTION: This product contains magnets. Do not palce in direct proximity with magnetically sensitive objects such as credit cards or exposed hard drives. Persons with pace makers are not recommended to use this product.

33-7786 REVF APR242017

Box Contents

Status LED
Product Label
Hidden Magnet
Micro USB Charging Port
Front
Back
Keypad

Micro-USB Cable

Adhesive Back
Magnet
Peel & Stick Mount

Decora® Wall Plate Adapter

Mounting Screws

Quick Start

1   Charge Your Keypad

To charge, connect the USB A connector on the supplied USB cable to any 5v USB power adapter like a smart phone charger. Connect the micro-USB end to your Keypad. Charging can take up to 3 hours. When the red LED on the Keypad turns green, charging is complete.

2   Download the iPort Connect App

Available on the App Store

To configure your Keypad to work with your Sonos devices, download the iPort Connect App from the App Store and follow the steps within the App. Requires an iPhone, iPad or iPod touch with iOS 9 or later.

3   Configure Your Keypad with Sonos Using the iPort Connect App

Instructions are included in the iPort Connect App. including firmware update.

Keypad LED Color & Blink Quick Reference

Blue - Configuration Mode

White - Device Functioning on the network

Yellow - Fail State, could mean several things:

1. Failed connection to the network
2. Failed connection to Sonos device
3. Sonos does not currently allow this function
4. During firmware update, battery is not sufficiently charged

Blinking Red - Low Battery

Solid Red - Battery is charging

Solid Green - Battery is fully charged

Purple - Firmware Update mode, goes away when firmware update is complete

Keypad Button Press Quick Reference

Function	Button Press	Action
Keypad Force-Reboot (in any mode)	Track Forward	Press and Hold for 6 Seconds
Update Keypad Firmware	Play/Pause & Volume Down	Press and Hold both for 10 Seconds
Enters Keypad into Configuration Mode	Volume Up and Down	Press and Hold both for 6 Seconds
Wake Up Keypad for 2 Minutes (Talk to iPort Connect App)	Play/Pause	Press and Hold for 6 Seconds

4   Choose a Great Place to Install on the Wall (see reverse side for wall installation)