

output capacity	100V	60W
output capacity	RMS 8Ω	60W
frequency range		80 Hz - 18 kHz < 0,5% THD
zones		1
direct output		4-8 Ohm / 70V / 100V
tone control		yes
built-in source		no
line-out		no
MIC input		3 (1 XLR / 2 jack 6,3 mm)
AUX input		2 RCA
priority input		1 (phoenix + contact)
priority levels		3
power supply		240V AC
power consumption		210W
dimenstions (h x w x d)		76 x 270 x 230mm
weight		3,59 kg


MX-60

TABLETOP MODEL MIXER AMPLIFIER

Compact mixer amplifier, for use in numerous commercial and industrial applications. Provided with individual volume control for each input channel and protection against short-circuits and thermal overload.



Listening to pleasant background music and creating the right atmosphere in this shop: nothing could be easier thanks to the budget-friendly MX-60!

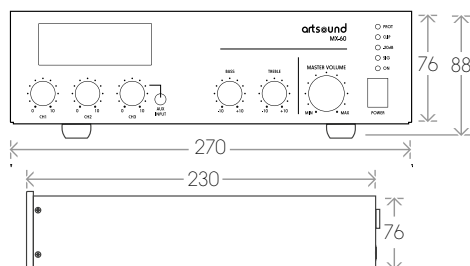

artsound